


Pocket Control Unit

type: 49281


- L1 - green Led blinking = Control unit turned on
- L2 - yellow Led lit = SHIFT mode Active
- L3 - yellow
- L4 - yellow
- L5 - red Led blinking = Battery low or Error

Push Button Assignment

Button	Command
1	R1 + R5
2	R2 + R5
3	R3 + R5

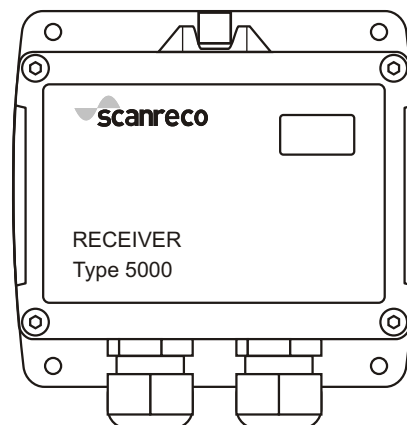


INTERNAL CONNECTION:

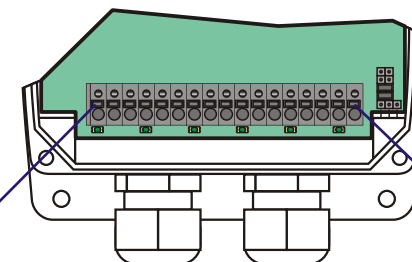

Negative	Positive	common	NC	NO	common	NC	NO	common	NC	NO	common	NC	NO	common	NC	NO
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
PWR		R1			R2			R3			R4			R5		

ACCESSORIES



Manual & Document



HCU Configuration

- The Pocket control unit (HCU) has 3 push button with one step.
- The Pocket HCU is powered automatically when a button is pushed.
- The HCU turns off automatically after 10s if not used.
- Batteries included.

CU Configuration

- The control unit 5000 has 5 relay with exchange contacts.
- The DV output (R5 energized) is activated by all the push-buttons and turns off with a 0,5s delay.
- Supply voltage: 10-28 Vdc.

Output relay

- Nominal current: 5A.
- Nominal voltage: 30Vdc/230Vac.

General information

- Working frequency: 2.4 GHz.
- For all other radio remote control information, see the "User manual".

Note di produzione:

- La pulsantiera si accende con un qualsiasi tasto.
- La pulsantiera si spegne dopo 10s di inutilizzo.
- L1: lampeggiante con pulsantiera accesa.
- L5: lampeggiante con batteria scarica o errore HCU.

SW CU: FC60005R

scanrefaber		CODE:	PREMUG32N	
		CUST. CODE:	XXXXX	
DESC: Global view of Scanreco G5-R5 remote control with Pocket 3 transmitter				
FILE: ...\\Radio_Scanreco\\G5\\Produzione\\R5-R\\Pocket\\PREMUG32N\\PREMUG32N-3_je.cdr				
DATE:	21/09/16	REV.	3	SHEET 1 OF 1

3	21/02/2020	Tolto etichetta frequenza 2.4GHz	GP	5	4
Rev.	Date	Description	Designed		