



AR 20 BP - AR 25 BP

Serie POLIPROPILENE
polypropylene series

BASSA PRESSIONE
low pressure



diserbo
spraying



deicing
deicing



disinfestazione
pest control



carriole
wheelbarrows



antincendio
fire-fighting


Gruppi comando separato, vedi pag. 90.

For remote control units please see page 90.

Kit Applicazioni vedi pag. 88.

Application kits, see page 88.

B
BlueFlex

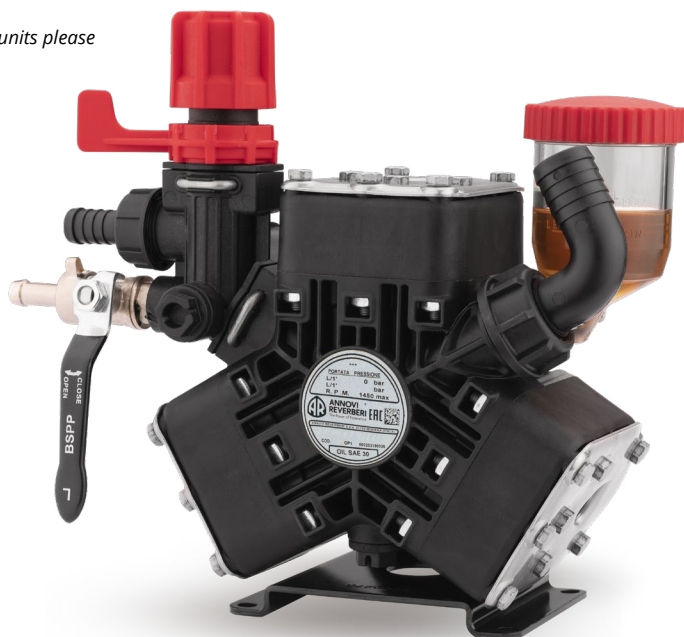

AR 25 bp GCI



SP



SGC



Disponibili elettropompe AR 20 bp, AR 25 DC con motori corrente continua

Electric motor pump AR 20 bp, AR 25 DC with DC motors available.

Caratteristiche Generali

Pompa a tre membrane con circuito in polipropilene rinforzato, elementi di fissaggio delle membrane in acciaio inossidabile, tenute in Viton.

Versioni: SP (cilindrico con chiavetta), CR (riduttore per motore a scoppio), EL (accoppiamento diretto a motore elettrico).

Regolatore di pressione incorporato o remoto in polipropilene con leva di sgancio in by-pass.

General Features


Three-diaphragm pump with reinforced Polypropylene circuit, stainless steel diaphragm mounting components, Viton seals.

Version: SP (cylindrical with shaft key), CR (reduction gearbox for internal combustion engine), EL (direct coupling to electric motor).

Integral or remote Polypropylene pressure regulator with bypassing release lever.

Versione GREEN OIL disponibile su richiesta
GREEN OIL version available upon request

DL_3348500 (GCI + pied)	sp_ar20_25bp.pdf	MI 93230
DL_3348505 (SGC)	3348600	CM AR20-25 SP GCI
	3348602	CM AR20-25 SP GCI CON PIEDE
	3348604	CM AR20-25 SP SGC
	3348606	CM AR20-25 SP SGC CON PIEDE

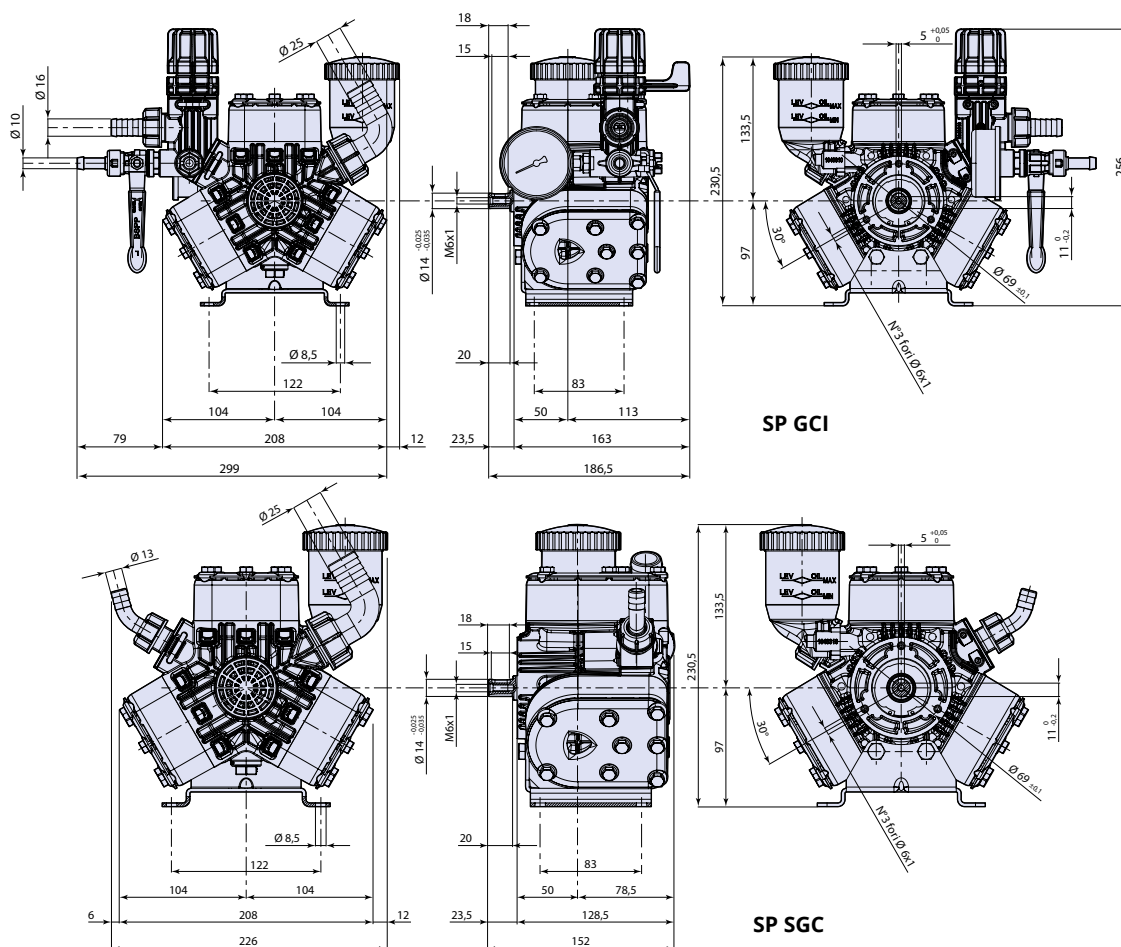

MOD	COD			 MAX	 MAX	 RPM		 NET					
	SP GCI + piede	SP SGC	SP SGC + piede	l/min	gpm	bar	psi	N°giri/1'	°C	°F	kg	lb	
AR 20 bp NBR	32271	32307	32275		19,3	5,3	20	290	1450	60	140	4	8,8
AR 20 bp 	32273	31609	31615		19,3	5,3	20	290	1450	60	140	4	8,8
AR 25 bp NBR	32272	32308	32276		23,0	6,4	20	290	1450	60	140	4	8,8
AR 25 bp 	32274	31610	31616		23,0	6,4	20	290	1450	60	140	4	8,8

Pompa con Membrane in BlueFlex™
Pumps with BlueFlex™ diaphragm

NBR Pompa con Membrane in NBR
Pumps with NBR diaphragm

 MAX		 RPM											
		1200			1300			1400			1450		
bar	psi	l/min	gpm	HP	l/min	gpm	HP	l/min	gpm	HP	l/min	gpm	HP
AR 20 bp													
0	0	16,6	4,4	0,1	17,4	4,6	0,1	18,5	4,9	0,1	19,3	5,1	0,1
10	145	14,4	3,8	0,4	15,8	4,2	0,4	17,1	4,5	0,4	17,7	4,7	0,4
15	218	13,8	3,6	0,5	15,4	4,1	0,6	16,8	4,4	0,6	17,3	4,6	0,6
20	290	13,3	3,5	0,7	15,1	4,0	0,7	16,4	4,3	0,8	16,9	4,5	0,8
AR 25 bp													
0	0	20,0	5,3	0,1	21,2	5,6	0,2	22,3	0,2	0,2	23,0	0,2	0,2
10	145	17,9	4,7	0,4	19,6	5,2	0,5	21,1	0,5	0,5	21,6	0,5	0,5
15	218	17,5	4,6	0,6	19,1	5,0	0,7	20,4	0,8	0,8	20,9	0,8	0,8
20	290	16,9	4,5	0,8	18,6	4,9	0,9	19,6	1,0	1,0	20,3	1,0	1,0