


Panel mounting pressure regulator



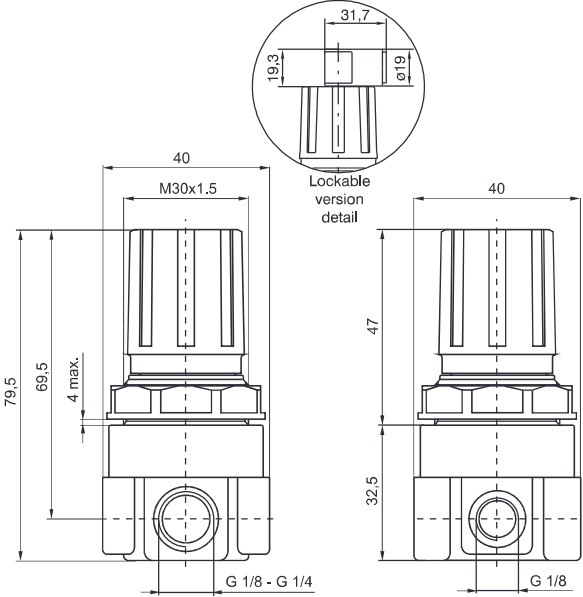


Ordering code

17109C.C.T.O

CONNECTIONS	
C	A = G 1/8"
	B = G 1/4"
ADJUSTING RANGE	
	A = 0 - 2 bar
C	B = 0 - 4 bar
	C = 0 - 8 bar
	D = 0 - 12 bar
TYPE	
	L = no Relieving
	SM = improved relieving
T	SR = Quick exhaust (Unbalanced poppet)
	SRM = Quick exhaust with improved relieving
	SMF = Improved relieving with controlled refuel
OPTION	
C	Standard (without options)
	K = Version with padlock

Example: 17109A.C
Panel mounting pressure regulator size 1 with G 1/8" connections, 0 - 8 bar adjusting range with relieving.

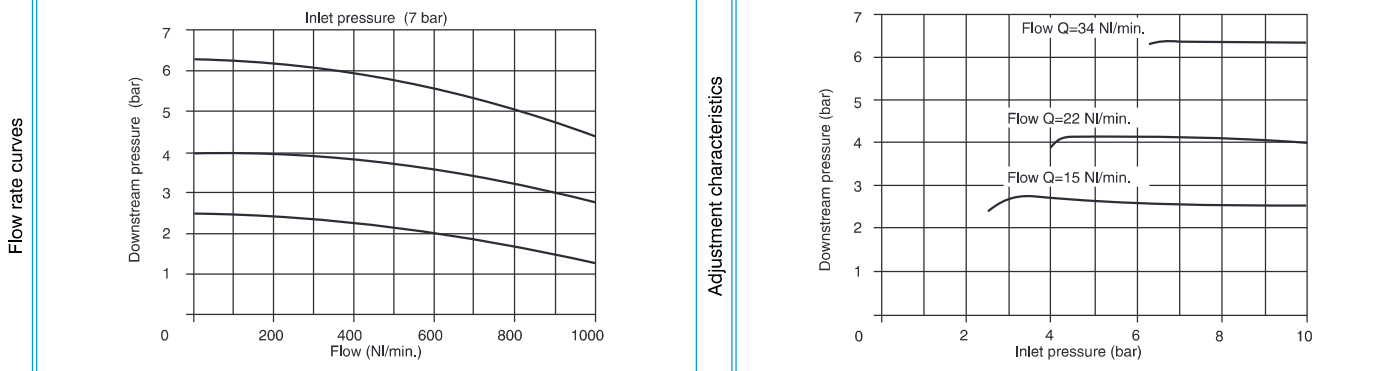

Operational characteristic	Technical characteristic	
- Diaphragm pressure regulator with relieving. - Balanced poppet. - Technopolymer body with aluminum reinforced threaded connections. - Handle lockable in the desired position by simply pressing it downwards. - Two pressure gauge connections with plug complete of seal. - Panel mounting bracket.	Connections	G 1/8" - G 1/4"
	Max working pressure (bar)	13 bar - 1,3 MPa
	Temperature °C	50°C
	Pressure gauge connections	G 1/8"
	Weight	gr. 110
	Pressure range (bar)	0 - 2 / 0 - 4 / 0 - 8 / 0 - 12
	Assembly position	Any
	Max. fittings torque	15 NmMax. fittings torque on technopolymer body