
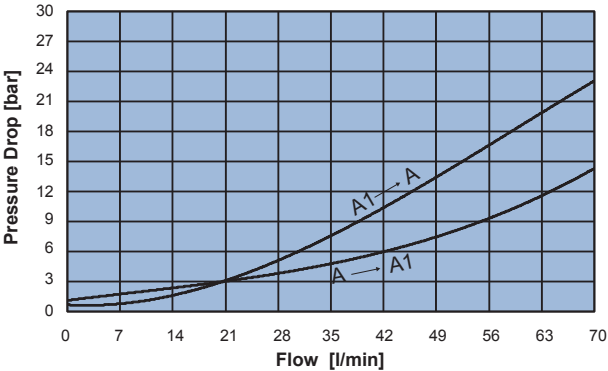
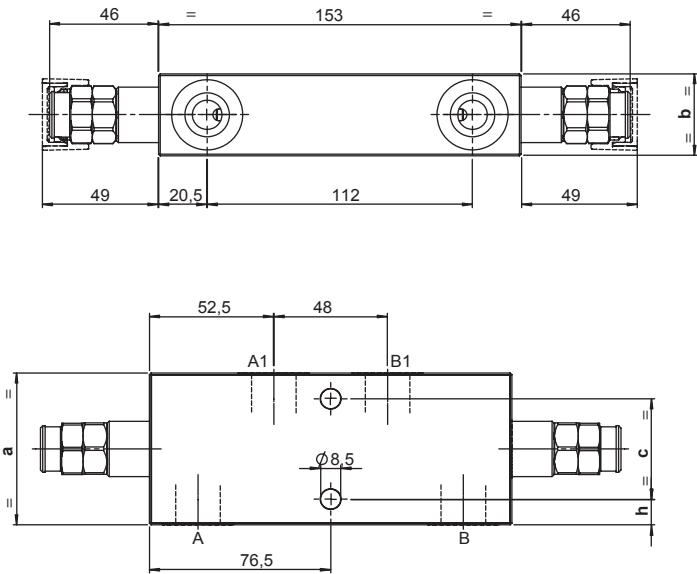


DOUBLE ACTING COUNTERBALANCE VALVE WITH COAXIAL CAVITY

- Flow.....70 l/min
- Max working pressure.....350 bar
- Compensation.....Not Compensated
- Weight G 3/8".....2 Kg
- Weight G 1/2".....2,65 Kg
- Tamper proof cap.....cod. 9021030190



Note:
- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD05X-C is recommended for circuits with high back pressure)

	a	b	c	h
03	55	30	38	8,5
04	65	35	43	11

Ordering code

H 5 0 6 0 N S 0 0

PILOT RATIO		SPRINGS	rp 4:1		rp 9:1		PORTS	03	04
40	4:1		2	3	2	3			
90	9:1	Setting range min.-max. [bar]	60 - 210	120 - 350	80 - 250	190 - 350	A,B,A1,B1	G 3/8"	G 1/2"
		Pressure Increase [bar/turn]	62	114	50	121			
		Standard setting 4 l/min [bar]	200	350	200	350			

