

JP-280 Electric universal motor


230 Volt, 50/60 Hz, 825 Watt, IP 24, alternatively 115 Volt, 60 Hz

Description

- The drive JP-280 is a compactly built, not explosion-proof, internally ventilated universal motor that is our top seller for aggressive media in the chemical and the galvanic industry beside JP-180.
- This handy, very robust and powerful motor can be used to drive the suction tubes of drum pumps. In this combination it is suitable for many thin liquid and lightly viscous, neutral, aggressive and non-flammable liquids (max 1.000 mPas). Its sophisticated, technically clear structure ensures an efficient and safe use when transferring a wide range of media.
- The drum pump motor is characterized not only by its lightweight (3,8 kg) but also by its elegant design and ease of use. The non-stationarily and stationarily usable drive is particularly suitable for intermittent operation. As internally

ventilated motor it has an optimal air cooling, low noise and ensures high operational safety and long lifetime.

- The motor housing made of Polypropylene ensures high chemical resistance in case of aggressive vapours of acids and alkalies.
- The standard in the on/off switch integrated low voltage release is intended to prevent an uncontrolled start of the drum pump motor after a power failure or voltage drop and thus guarantees maximum safety.
- The flow rate of the media to be pumped can be regulated by an optionally available speed control that is integrated in the motor handle. Therefore the flow rate can be adjusted to the needs of the user.
- The maximum density of the media is for the JP-280 universal motor 1,9, the maximum viscosity 1.000 mPas.

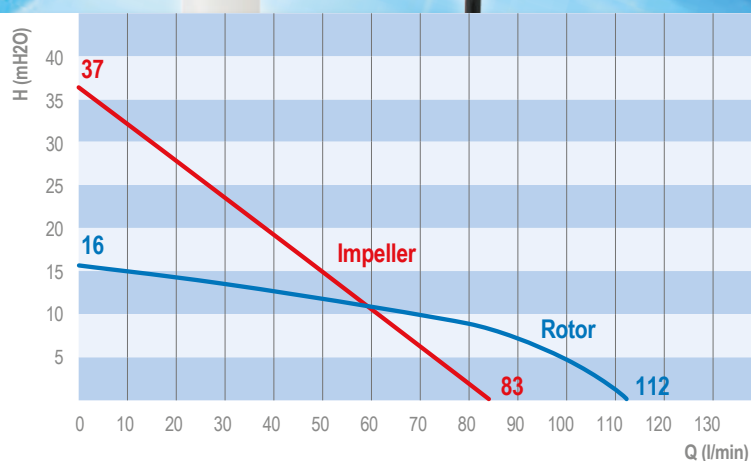

Electric universal motor JP-280

230 Volt, 50/60 Hz, 825 Watt, IP 24, double insulation protection class II, over load protection switch with integrated low voltage release. 5 m cable with plug.

Speed control as option.

Operating data JP-280

Flow rate (with hose and oval gear meter):	up to 112 l/min (Rotor)* up to 83 l/min (Impeller)*
Head:	up to 16 m (Rotor)* up to 37 m (Impeller)*
Viscosity:	up to 1.000 mPas*
Density:	up to 1,9*

* Data obtained with a 1" pipe are indicated in the performance curve.

* All specified values are real measured maximum values.
Test media water 20 °C, pressure pipe 1", oval gear meter 1",
measured values: ± 5%



JP-280

Version	Voltage	Order No.
without LVR	230 V 1~, 50/60 Hz, 825 W	1280 2300
	115 V 1~, 60 Hz, 825 W	1280 1150
with LVR	230 V 1~, 50/60 Hz, 825 W	1280 2301
	115 V 1~, 60 Hz, 825 W	1280 1151
without LVR, with SC	230 V 1~, 50/60 Hz, 825 W	1280 2302
	115 V 1~, 60 Hz, 825 W	1280 1152
with LVR + SC	230 V 1~, 50/60 Hz, 825 W	1280 2303
	115 V 1~, 60 Hz, 825 W	1280 1153

LVR: Low voltage release
SC: Speed control

Electronic speed control

The speed of the drum pump motor JP-280 can be controlled electronically via a knob on the handle. This enables an adjustment of the flow rate.

The electronic speed control is available as an option.

