


BSP - Weiblich mit drehbarer Mutter
BSP - Männlich mit 60°-Konus
und angedrehter Dichtkante Form B

BSP - Female with Swivel Nut
BSP - Male with 60°-Cone
and Sealing Shoulder Form B

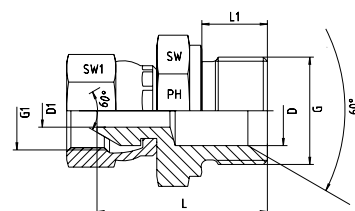

Druck Pressure	Gewinde Thread		Ca. Maße Approx. Dimensions						Bemerkungen Notes	Bestellzeichen Order-Code
PN	G1	G	L	L1	D	D1	SW	SW1		
400	1/8"-28	1/8"-28	23,5	8,0	4,0	4,0	14	14		2050511-02-02
400	1/8"-28	1/4"-19	27,5	12,0	4,0	4,0	19	14		2050511-02-04
400	1/4"-19	1/8"-28	27,0	8,0	4,0	4,0	14	19		2050511-04-02
400	1/4"-19	1/4"-19	30,0	12,0	5,0	5,0	19	19		2050511-04-04
400	1/4"-19	3/8"-19	31,5	12,0	9,0	5,0	22	19		2050511-04-06
400	1/4"-19	1/2"-14	35,5	14,0	11,5	5,0	27	19		2050511-04-08
400	3/8"-19	1/8"-28	26,0	8,0	4,5	4,5	17	19		2050511-06-02
400	3/8"-19	1/4"-19	31,5	12,0	5,0	8,0	19	22		2050511-06-04
400	3/8"-19	3/8"-19	32,5	12,0	8,0	8,0	22	22		2050511-06-06
400	3/8"-19	1/2"-14	37,0	14,0	11,5	8,0	27	22		2050511-06-08
400	1/2"-14	1/4"-19	31,5	12,0	5,0	11,0	19	27		2050511-08-04
400	1/2"-14	3/8"-19	32,5	12,0	9,0	9,0	22	27		2050511-08-06
400	1/2"-14	1/2"-14	36,0	14,0	11,0	11,0	27	27		2050511-08-08
400	1/2"-14	3/4"-14	39,5	16,0	11,0	11,0	32	27		2050511-08-12
400	3/4"-14	1/2"-14	42,0	14,0	11,5	16,0	27	32		2050511-12-08
400	3/4"-14	3/4"-14	41,0	16,0	16,5	16,5	32	32		2050511-12-12
400	3/4"-14	1"-11	45,0	18,0	22,5	16,5	41	32		2050511-12-16
400	1"-11	3/4"-14	44,0	18,0	17,0	22,0	32	41		2050511-16-12
400	1"-11	1"-11	45,5	18,0	22,0	22,0	41	41		2050511-16-16
200	1"-11	1 1/4"-11	49,5	20,0	29,0	22,5	50	41		2050511-16-20
200	1 1/4"-11	1"-11	53,0	18,0	22,0	22,0	41	50		2050511-20-16
200	1 1/4"-11	1 1/4"-11	48,5	20,0	28,0	28,0	50	50		2050511-20-20
200	1 1/2"-11	1 1/2"-11	53,0	22,0	33,0	33,0	55	55		2050511-24-24
100	2"-11	2"-11	72,0	23,0	42,0	42,0	70	70		2050511-32-32