


NPT - Männlich mit 60°-Konus

NPT - Male with 60°-Cone

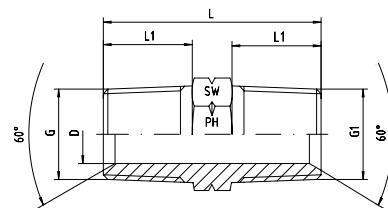

Druck Pressure	Gewinde Thread		Ca. Maße Approx. Dimensions				Bemerkungen Notes	Bestellzeichen Order-Code
PN	G = NPT	G1 = NPT	L	L1	D	SW		
630	1/8"-27	1/8"-27	27,0	10,0	5,0	12		1282810-02-02
630	1/4"-18	1/4"-18	36,5	15,0	7,0	14		1282810-04-04
630	3/8"-18	3/8"-18	36,5	15,3	9,0	19		1282810-06-06
630	1/2"-14	1/2"-14	48,4	20,0	13,5	22		1282810-08-08
630	3/4"-14	3/4"-14	50,0	20,0	18,0	27		1282810-12-12
400	1"-11,5	1"-11,5	59,0	25,0	21,0	36		1282810-16-16
400	1 1/4"-11,5	1 1/4"-11,5	63,0	25,5	31,5	46		1282810-20-20
400	1 1/2"-11,5	1 1/2"-11,5	65,0	26,0	36,0	50		1282810-24-24
315	2"-11,5	2"-11,5	68,0	26,0	46,0	65		1282810-32-32


GERADE - ADAPTER STRAIGHT - ADAPTORS



EDELSTAHL / STAINLESS STEEL
VERBINDUNGSTECHNIK
FLUID CONNECTORS

NPT - Männlich mit 60°-Konus

NPT - Male with 60°-Cone

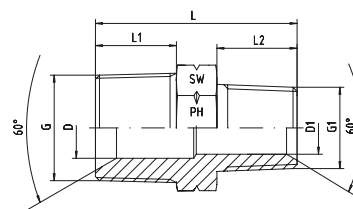

Druck Pressure	Gewinde Thread		Ca. Maße Approx. Dimensions							Bemerkungen Notes	Bestellzeichen Order-Code
PN	G = NPT	G1 = NPT	L	L1	L2	D	D1	SW			
630	1/4"-18	1/8"-27	32,0	15,0	10,0	7,0	5,0	14			1282810-04-02
630	3/8"-18	1/4"-18	36,5	15,3	15,0	7,0	7,0	19			1282810-06-04
630	1/2"-14	1/4"-18	43,0	20,0	15,0	7,0	7,0	22			1282810-08-04
630	1/2"-14	3/8"-18	43,7	20,0	15,3	13,5	8,0	22			1282810-08-06
630	3/4"-14	1/2"-14	50,0	20,0	20,0	18,0	13,5	27			1282810-12-08
400	1"-11,5	1/2"-14	54,0	25,0	20,0	21,0	13,5	36			1282810-16-08
400	1"-11,5	3/4"-14	54,2	25,0	20,0	21,0	18,0	36			1282810-16-12