


## RLD SHOWER HEAD

| P/N               | Inlet     | Weight              |      |  |  |
|-------------------|-----------|---------------------|------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|                   |           | gr                  | oz   |                                                                                   |                                                                                   |
| 29.1200.00R       | 1/2 Bsp M | 670                 | 23,6 | 1                                                                                 | ✓                                                                                 |
| Rated Pressure    |           | 5 bar - 0,5 MPa     |      | 73 psi                                                                            |                                                                                   |
| Rated Flow        |           | 18 l/min            |      | 4,68 USGpm                                                                        |                                                                                   |
| Rated Temperature |           | 60 °C               |      | 140 °F                                                                            |                                                                                   |
| Material          |           | Chrome plated brass |      |                                                                                   |                                                                                   |



## RPS BALL VALVE STAINLESS STEEL

| P/N               | Material              | Hand Grip | Trigger   | Type | Weight |       |  |  |
|-------------------|-----------------------|-----------|-----------|------|--------|-------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|                   |                       |           |           |      | gr     | oz    |                                                                                   |                                                                                   |
| 29.1000.00        | Stainless steel 303   | Handle    | Blue      | A    | 750    | 26,45 | 4                                                                                 |                                                                                   |
| 29.1030.00        | Stainless steel 303   | Butterfly | Blue      | D    | 750    | 26,45 | 4                                                                                 | ✓                                                                                 |
| 29.1050.00        | Stainless steel Ai316 | Handle    | Red       | B    | 750    | 26,45 | 4                                                                                 |                                                                                   |
| 29.1080.00        | Stainless steel Ai316 | Butterfly | Red       | C    | 750    | 26,45 | 4                                                                                 | ✓                                                                                 |
| Rated Pressure    | 24 bar - 2,4 MPa      |           | 350 psi   |      |        |       |                                                                                   |                                                                                   |
| Rated Flow        | 80 l/min              |           | 21 USGpm  |      |        |       |                                                                                   |                                                                                   |
| Rated Temperature | 90 °C                 |           | 195 °F    |      |        |       |                                                                                   |                                                                                   |
| Inlet             |                       |           | 1/2 Bsp F |      |        |       |                                                                                   |                                                                                   |
| Outlet            |                       |           | 1/2 Bsp F |      |        |       |                                                                                   |                                                                                   |
| Hole size         | 15 mm                 |           | 0.59 in   |      |        |       |                                                                                   |                                                                                   |

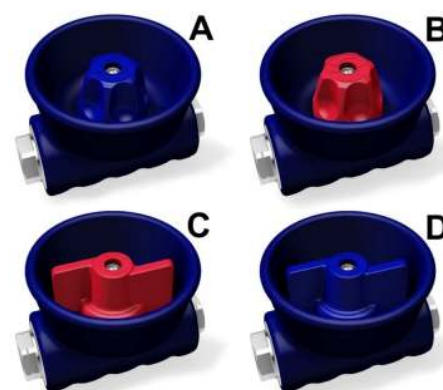

## RL 60 - SST FOAM GUN -SLOW OFF SYSTEM

| P/N                              | Inlet            | Outlet           | Col. | Weight   |       |  |  |
|----------------------------------|------------------|------------------|------|----------|-------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                  |                  |                  |      | gr       | oz    |                                                                                     |                                                                                     |
| 30.3170.00                       | + sw.5 1/2 Bsp F | 1/2 Bsp F        | Blue | 616      | 21,73 | 10                                                                                  | ✓                                                                                   |
| Inlet with swivel                |                  |                  |      |          |       |                                                                                     |                                                                                     |
| 30.3170.40                       | + sw.5 1/2 Bsp F | 1/2 Bsp F        | Red  | 616      | 21,73 | 10                                                                                  |                                                                                     |
| Inlet with swivel                |                  |                  |      |          |       |                                                                                     |                                                                                     |
| 30.3170.58                       | + sw.5 1/2 Bsp F | 1/2 Bsp F        | Blue | 616      | 21,73 | 10                                                                                  |                                                                                     |
| Inlet with swivel<br>Teflon seat |                  |                  |      |          |       |                                                                                     |                                                                                     |
| Rated Pressure                   |                  | 60 bar - 6 MPa   |      | 870 psi  |       |                                                                                     |                                                                                     |
| Permissible Pressure             |                  | 65 bar - 6,5 MPa |      | 950 psi  |       |                                                                                     |                                                                                     |
| Rated Flow                       |                  | 60 l/min         |      | 16 USGpm |       |                                                                                     |                                                                                     |
| Rated Temperature                |                  | 100 °C           |      | 210 °F   |       |                                                                                     |                                                                                     |
| Material                         |                  | Stainless steel  |      |          |       |                                                                                     |                                                                                     |



## RL 60 +SW GUN +ARS- B- BALL QUICK COUPLING

| P/N                  | Inlet           | Outlet           | Weight |          |  |  |
|----------------------|-----------------|------------------|--------|----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                      |                 |                  | gr     | oz       |                                                                                     |                                                                                     |
| 30.3190.00           | + sw. 1/2 Bsp F | ARS 178 B        | 689    | 24,3     | 2                                                                                   | ✓                                                                                   |
| Inlet with swivel    |                 |                  |        |          |                                                                                     |                                                                                     |
| Rated Pressure       |                 | 60 bar - 6 MPa   |        | 870 psi  |                                                                                     |                                                                                     |
| Permissible Pressure |                 | 65 bar - 6,5 MPa |        | 950 psi  |                                                                                     |                                                                                     |
| Rated Flow           |                 | 60 l/min         |        | 16 USGpm |                                                                                     |                                                                                     |
| Rated Temperature    |                 | 100 °C           |        | 210 °F   |                                                                                     |                                                                                     |
| Material             |                 | Stainless steel  |        |          |                                                                                     |                                                                                     |

