

## Jetter Valves



Jetter valves are special valve assemblies which allow to shut off one particular intake valve. The jetter valve cuts off the flow of one of the three pistons of the jetter pump. Due to this the pump starts pulsating which causes significant vibrations at the nozzle and an increased cleaning effect at a reduced flow rate (approx. -1/3 of the full flow rate of the pump). Jetter valves create vibrations to help the hose sliding around tight bends in small lines. Jetter valves should not be combined with pulsation dampers in one jetter unit. Pulsation can be started or stopped by a lever or hand wheel at the jetter valve.

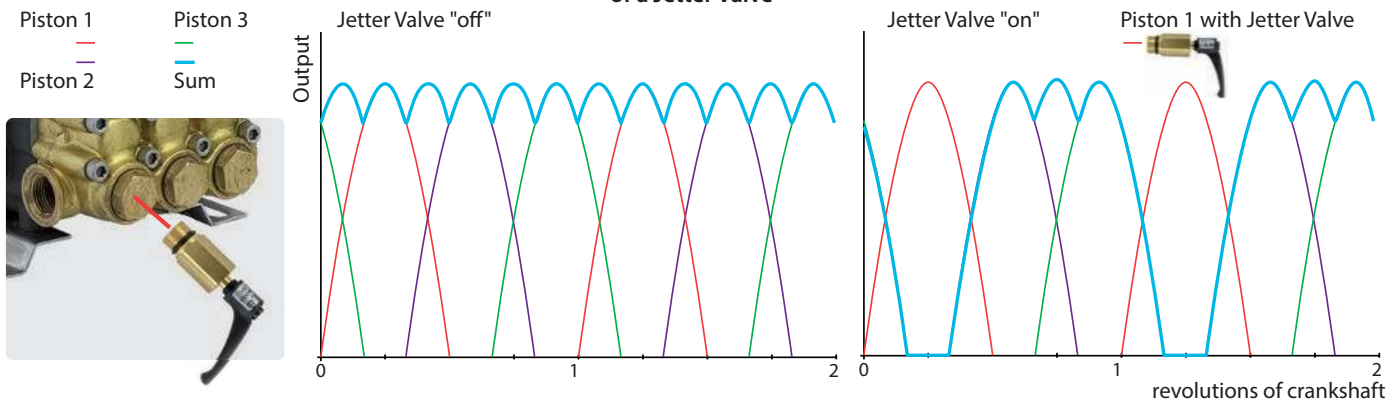
## Tip cleaner



| R+M Nr.    | TYP    |
|------------|--------|
| 170 402 35 | XT, XM |
| 170 401 61 | RK     |
| 170 402 36 | XW     |

High speed steel (HSS) with aluminium shaft.  
 42 mm

| R+M Nr.     | Ø   |
|-------------|-----|
| 200 049 042 | 0.5 |

Functional principle  
of a Jetter Valve

## Towing-Eye Kit ST-49



For M5 nozzle bodies

| R+M Nr.     | Ø   |
|-------------|-----|
| 200 049 015 | 0,5 |

## Sting extension



Hardened stainless steel.  
 For M5 nozzle bodies

| R+M Nr.     | Ø    |
|-------------|------|
| 040 075 090 | M5 M |

## Drain jet extension

## Lance with female thread

1/4" M : 1/4" F BSP.

Drain jet extension for cleaning pipes and shafts of large diameter to prevent reversal in direction of travel.

Max. 400 bar



| R+M Nr.     | ↔      | (M)             |
|-------------|--------|-----------------|
| 070 000 097 | 100 mm | stainless steel |
| 070 000 098 | 150 mm | stainless steel |
| 070 000 099 | 200 mm | stainless steel |
| 070 000 095 | 250 mm | stainless steel |
| 070 000 101 | 350 mm | stainless steel |

## Functional principle

