


Einhandkupplung vernickelt

Innengewinde

Coupling female nickel plated

Rubinetto rapido femmina nichelato

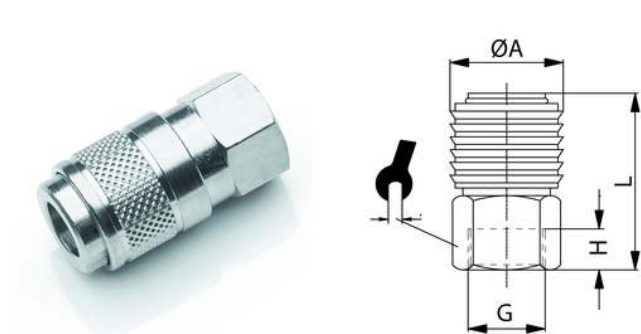

ITV	DN	G	H	ØA	L	
430212-VN	5	G1/8	7,5	18	35	16
430213-VN	5	G1/4	11	18	38,5	16
430214-VN	5	G3/8	9	16	38	19
430013-VN	7,2	G1/4	9	27	43	22
430014-VN	7,2	G3/8	9	27	43	22
430015-VN	7,2	G1/2	12	27	46	24


Körper:	Messing
Body:	brass
Corpo:	ottone
Federn, Sprengringe:	Edelstahl
Spring, snap rings:	inox
Molla, anello:	inox
Dichtungen:	Perbunan
Sealing:	perbunan
Guarnizioni:	perbunan
Betriebstemperatur:	-20 °C bis +100 °C
Working temperature:	-20 °C to +100 °C
Temperatura di esercizio:	da -20 °C a +100 °C
Betriebsdruck:	max. 35 bar
Working pressure:	max. 35 bar
Pressione di esercizio:	max. 35 bar
Medium:	Druckluft, Wasser.
Medium:	compressed air, water.
Fluido:	Aria compressa, acqua.
zyl. Gewinde:	DIN EN ISO 228
cyl. threads:	DIN EN ISO 228
Filettatura:	DIN EN ISO 228

Einhandkupplung

mit Schlauchtülle

Coupling with adaptor

Rubinetto rapido con portagomma

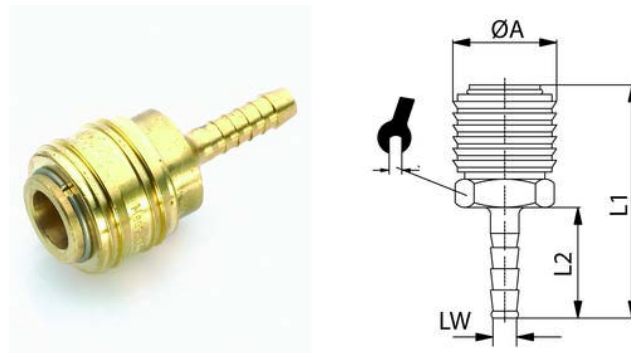

ITV	DN	LW	ØA	L1	L2	
430222	5	4	16	46	17	14
430223	5	6	16	46	17	14
430224	5	8	16	46	17	14
430225	5	9	16	46	17	14
430226	5	10	16	46	17	14
430023	7,2	6	27	60	25	21
430024	7,2	8	27	60	25	21
430025	7,2	9	27	60	25	21
430026	7,2	10	27	60	25	21
430027	7,2	13	27	60	25	21

Körper:	Messing
Body:	brass
Corpo:	ottone
Federn, Sprengringe:	Edelstahl
Spring, snap rings:	inox
Molla, anello:	inox
Dichtungen:	Perbunan
Sealing:	perbunan
Guarnizioni:	perbunan
Betriebstemperatur:	-20 °C bis +100 °C
Working temperature:	-20 °C to +100 °C
Temperatura di esercizio:	da -20 °C a +100 °C
Betriebsdruck:	max. 35 bar
Working pressure:	max. 35 bar
Pressione di esercizio:	max. 35 bar
Medium:	Druckluft, Wasser.
Medium:	compressed air, water.
Fluido:	Aria compressa, acqua.
zyl. Gewinde:	DIN EN ISO 228
cyl. threads:	DIN EN ISO 228
Filettatura:	DIN EN ISO 228