


## Stecknippel vernickelt

mit Innengewinde  
Female coupling nickel plated  
Innesto rapido femmina

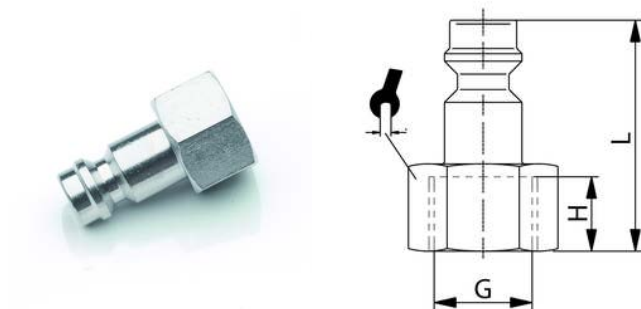

| ITV       | DN  | G    | H   | L    |    |
|-----------|-----|------|-----|------|----|
| 430272-VN | 5   | G1/8 | 7,5 | 25   | 14 |
| 430273-VN | 5   | G1/4 | 11  | 28,5 | 17 |
| 430042-VN | 7,2 | G1/8 | 7   | 30   | 14 |
| 430043-VN | 7,2 | G1/4 | 10  | 33   | 17 |
| 430044-VN | 7,2 | G3/8 | 10  | 33   | 19 |
| 430045-VN | 7,2 | G1/2 | 12  | 36   | 24 |

|                           |                        |
|---------------------------|------------------------|
| Körper:                   | Messing                |
| Body:                     | brass                  |
| Corpo:                    | ottone                 |
| Betriebstemperatur:       | -20 °C bis +100 °C     |
| Working temperature:      | -20 °C to +100 °C      |
| Temperatura di esercizio: | da -20 °C a +100 °C    |
| Betriebsdruck:            | max. 35 bar            |
| Working pressure:         | max. 35 bar            |
| Pressione di esercizio:   | max. 35 bar            |
| Medium:                   | Druckluft, Wasser.     |
| Medium:                   | compressed air, water. |
| Fluido:                   | Aria compressa, acqua. |
| zyl. Gewinde:             | DIN EN ISO 228         |
| cyl. threads:             | DIN EN ISO 228         |
| Filettatura:              | DIN EN ISO 228         |

## Stecknippel

mit Schlauchtülle  
Coupling with adaptor  
Innesto rapido con portagomma



| ITV    | DN  | LW | L1 | L2   |
|--------|-----|----|----|------|
| 430242 | 5   | 4  | 32 | 17   |
| 430243 | 5   | 6  | 32 | 16,5 |
| 430244 | 5   | 8  | 32 | 17   |
| 430245 | 5   | 9  | 32 | 17   |
| 430033 | 7,2 | 6  | 44 | 24   |
| 430034 | 7,2 | 8  | 44 | 24   |
| 430035 | 7,2 | 9  | 44 | 23   |
| 430036 | 7,2 | 10 | 44 | 23   |
| 430037 | 7,2 | 13 | 44 | 23   |

|                           |                        |
|---------------------------|------------------------|
| Körper:                   | Messing                |
| Body:                     | brass                  |
| Corpo:                    | ottone                 |
| Betriebstemperatur:       | -20 °C bis +100 °C     |
| Working temperature:      | -20 °C to +100 °C      |
| Temperatura di esercizio: | da -20 °C a +100 °C    |
| Betriebsdruck:            | max. 35 bar            |
| Working pressure:         | max. 35 bar            |
| Pressione di esercizio:   | max. 35 bar            |
| Medium:                   | Druckluft, Wasser.     |
| Medium:                   | compressed air, water. |
| Fluido:                   | Aria compressa, acqua. |