


ipso 028

Drosselrückschlagventil mit Ringstück Typ A Zuluft drosselbar

Unidirectional flow regulator type A for valves

Regolatore di flusso unidirezionale per valvole tipo A

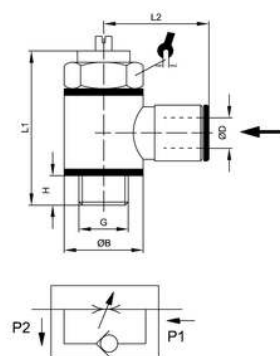

ITV	ØD	G	H	ØB	L1	L2		NI/min*
304701	4	M5	4	SW9	25,5	20	8	45
304702	4	G1/8	5	14	32	21	14	310
304704	5	G1/8	5	14	32	22,5	14	310
304714	6	M5	4	SW9	25,5	21,5	8	45
304705	6	G1/8	5	14	32	23	14	390
304706	6	G1/4	6	18	37	24	17	710
304707	8	G1/8	5	14	32	24,5	14	390
304708	8	G1/4	6	18	37	26	17	810
304709	8	G3/8	6,5	21	46	27,5	20	1050
304710	10	G1/4	6	18	37	27	17	810
304711	10	G3/8	6,5	21	46	28,5	20	1050
304713	12	G1/4	6	18	37	28,5	17	810
304712	12	G3/8	6,5	21	46	29,5	20	1050

* Ermittlung der Durchflusswerte bei 6 bar * Evaluation of flow rate at 6 bar * portata nominale a 6 bar


Körper:	CW617N vernickelt
Body:	CW617N nickel-plated
Corpo:	ottone CW617N nichelato
O-Ring:	NBR
O-rings:	NBR
O-Ring:	NBR 70 SH
Dichtungen:	Kunststoff
Seals:	Plastics
Rondella di tenuta sul filetto:	tecnopolimero
zyl. Gewinde:	DIN EN ISO 228
cyl. Threads:	DIN EN ISO 228
Filettatura:	gas cilindrica ISO 228
Betriebstemperatur:	-20 °C bis +70 °C
Working temperature:	-20 °C up to +70 °C
Temperatura di esercizio:	da -20 °C a +70 °C
Betriebsdruck:	max. 10 bar
Working pressure:	max. 10 bar
Pressione di esercizio:	max. 10 bar
Für geölte und ungeölte Druckluft.	
For lubricated and non-lubricated compressed air.	
Per aria compressa sia lubrificata che non.	

STX 028 Edelstahl

Drosselrückschlagventil mit Ringstück, Typ A, Zuluft drosselbar

Unidirectional flow regulator type A for valves (stainless steel)

Regolatore di flusso unidirezionale per cilindro tipo A - Inox



ITV	ØD	G	H	L1 max	L2	
304701-ES	4	M5	3,7	24	19,5	8
304702-ES	4	G1/8	7	32	21,0	14
304714-ES	6	M5	3,7	24	21,5	8
304705-ES	6	G1/8	7	32	22,5	14
304706-ES	6	G1/4	8,0	40	24,5	17
304707-ES	8	G1/8	7,0	32	24,0	14
304708-ES	8	G1/4	8	40	26,0	17

Körper:	AISI 316L
Body:	AISI 316L
Corpo:	AISI 316L
O-Ring:	FKM
O-ring:	FKM
O-Ring:	FKM
Dichtungen:	FKM
Seals:	FKM
Rondella di tenuta sul filetto:	FKM
zyl. Gewinde:	DIN EN ISO 228
cyl. Threads:	DIN EN ISO 228
Filettatura:	gas cilindrica ISO 228
Betriebstemperatur:	-20 °C bis +150 °C
Working temperature:	-20 °C up to +150 °C
Temperatura di esercizio:	da -20 °C a +150 °C
Betriebsdruck:	-0,98 bis 16 bar
Working pressure:	-0,98 up to 16 bar
Pressione di esercizio:	da -0,98 a 16 bar
Für geölte und ungeölte Druckluft.	
For lubricated and non-lubricated compressed air.	
Per aria compressa sia lubrificata che non.	