
PT0019728

Limit valve for controlling tipping hydraulics

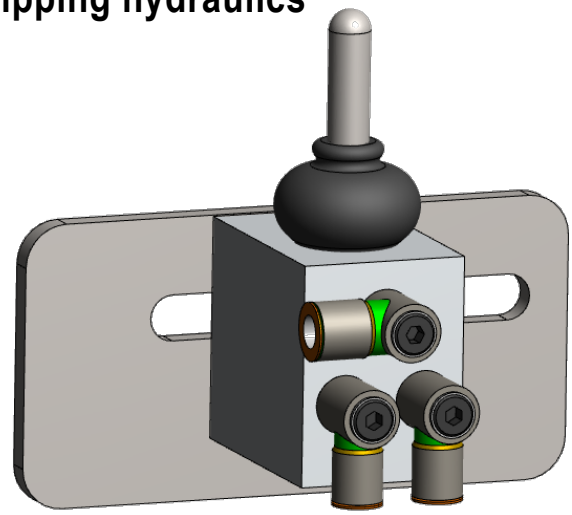


Description:

- Pneumatic limit valve for tipping systems
- Assembly between pneumatic servo valve and hydraulic valve


Technical specifications

- Supply pressure range 2 … 10 bar
- Ambient temperature -20 … +80 °C
- Operating medium Compressed air, filtration 20 µm, no lubrication is needed
- Nominal flow 12 dm3/s
- Connection port size G1/8, 6 mm tube, exhaust 8 mm tube
- Weight 0,83 kg

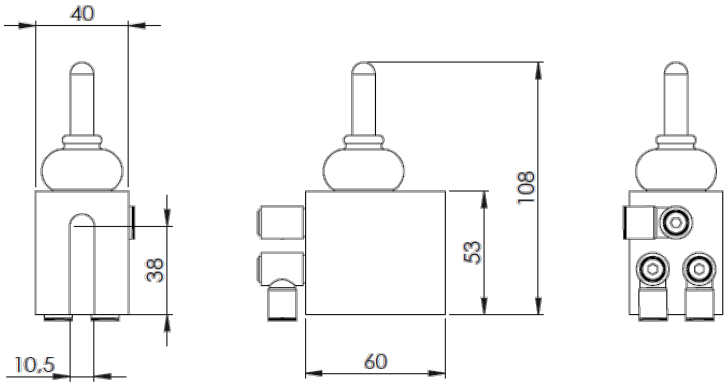

Material specification

- Body Anodized aluminium
- Internal valve parts Brass
- Springs Stainless steel
- Seals NBR and PU
- Gaiter EPDM

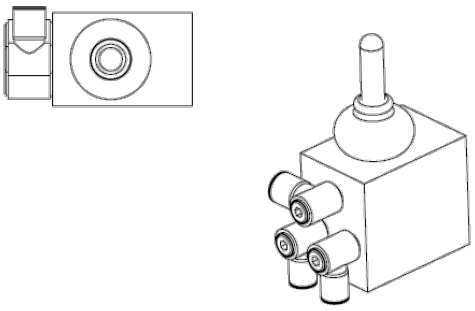

Pimatic Oy | Klaavolantie 1, 32700 Huittinen, Finland
Tel. +358 (0)20 770 9501 | info@pimatic.fi
www.pimatic.fi