

24°- KONUS-AUSSENGEWINDE


24°- MALE-CONE



EDELSTAHL / STAINLESS STEEL
VERBINDUNGSTECHNIK
FLUID CONNECTORS

Mit 24°-Konus für Schneidringverschraubungen
DIN 2353 / DIN EN ISO 8434-1
Schwere Reihe = CES

For Compression Couplings
DIN 2353 / DIN EN ISO 8434-1 with 24°-Cone
Heavy Series = CES

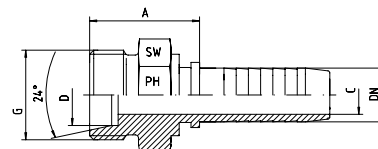

Schlauch Hose	DN Bore	Gewinde Thread	Rohr A.D. Tube O.D.	Ca. Maße Approx. Dimensions			Bemerkungen Notes	Bestellzeichen Order-Code
DN	in.	G	D	A	C	SW		
05	3/16"	M 14 x 1,5	6	23,7	3,0	14		CES-06-DN 05
06	1/4"	M 14 x 1,5	6	25,0	4,0	14		CES-06-DN 06
05	3/16"	M 16 x 1,5	8	23,7	3,0	17		CES-08-DN 05
06	1/4"	M 16 x 1,5	8	25,5	4,0	17		CES-08-DN 06
06	1/4"	M 18 x 1,5	10	25,5	4,0	19		CES-10-DN 06
08	5/16"	M 18 x 1,5	10	25,5	5,5	19		CES-10-DN 08
10	3/8"	M 18 x 1,5	10	25,5	7,0	19		CES-10-DN 10
08	5/16"	M 20 x 1,5	12	27,5	5,5	22		CES-12-DN 08
10	3/8"	M 20 x 1,5	12	25,5	7,0	22		CES-12-DN 10
08	5/16"	M 22 x 1,5	14	27,5	5,5	22		CES-14-DN 08
10	3/8"	M 22 x 1,5	14	28,0	7,0	22		CES-14-DN 10
10	3/8"	M 24 x 1,5	16	28,0	7,0	24		CES-16-DN 10
12	1/2"	M 24 x 1,5	16	28,0	9,5	24		CES-16-DN 12
12	1/2"	M 30 x 2	20	33,0	9,5	30		CES-20-DN 12
16	5/8"	M 30 x 2	20	34,0	12,5	30		CES-20-DN 16
19	3/4"	M 30 x 2	20	37,0	14,5	30		CES-20-DN 19
19	3/4"	M 36 x 2	25	40,0	14,5	36		CES-25-DN 19
25	1"	M 36 x 2	25	40,0	20,0	36		CES-25-DN 25
25	1"	M 42 x 2	30	42,5	20,0	46		CES-30-DN 25
31	1 1/4"	M 52 x 2	38	45,0	25,5	55		CES-38-DN 31