


R650G25

printed on: 06-06-2026



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	20 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	22 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	10 bar
Seals	GUARNITAL
Temperature range	-30°C +100°C

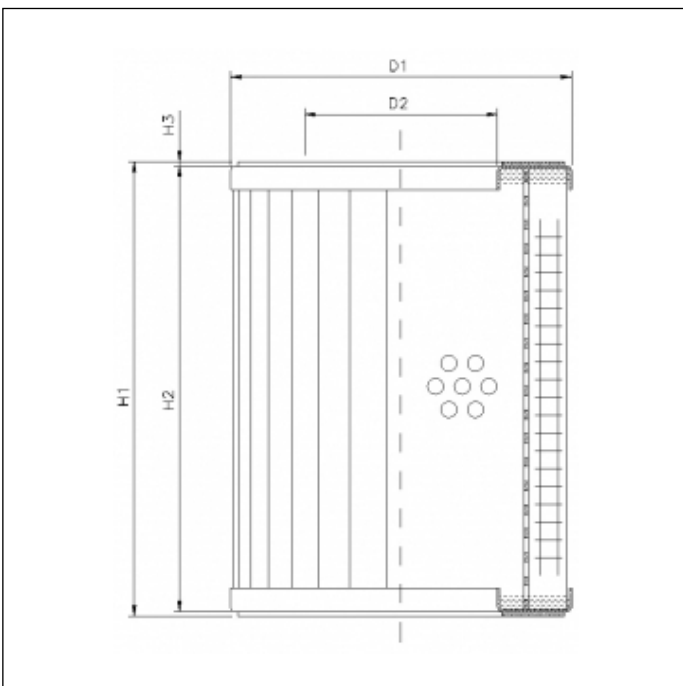

OVERALL DIMENSIONS

D1	83,0 mm
D2	40,3 mm
H1	197,0 mm
H2	194,0 mm
H3	1,5 mm

Technical information may change without notice. Image and drawing are representative only