


## XD1000G06A

printed on: 07-06-2026



### TECHNICAL INFO

|                     |                                           |
|---------------------|-------------------------------------------|
| Media type          | INORGANIC FIBERGLASS                      |
| Efficiency          | 5 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$  |
| Efficiency 1        | 7 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$ |
| Flow direction      | OUT-IN                                    |
| Collapse $\Delta p$ | 21 bar                                    |
| Seals               | NBR                                       |
| Temperature range   | -30°C +100°C                              |

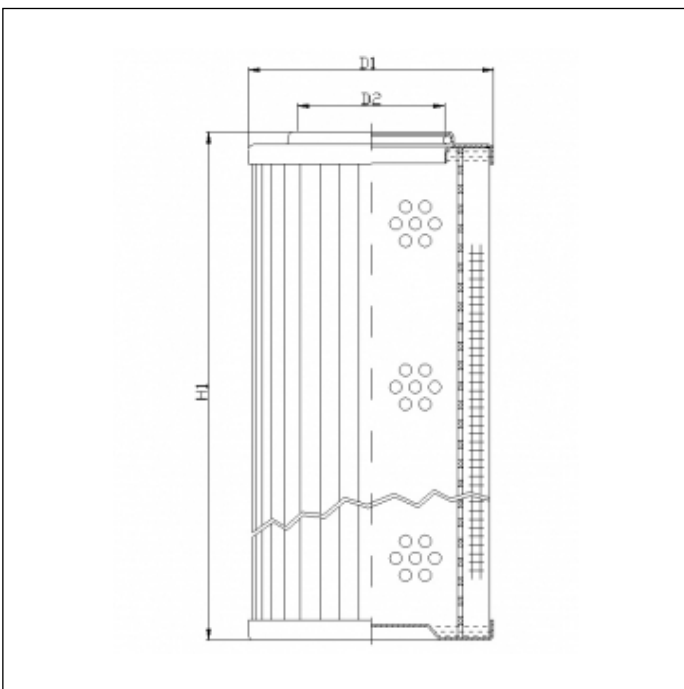

### OVERALL DIMENSIONS

|    |          |
|----|----------|
| D1 | 100,0 mm |
| D2 | 60,2 mm  |
| H1 | 628,0 mm |