


RHR185G20B3/AB1

printed on: 07-06-2026



TECHNICAL INFO

| | |
|---------------------|--|
| Media type | INORGANIC FIBERGLASS |
| Efficiency | 20 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$ |
| Efficiency 1 | 22 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$ |
| Flow direction | OUT-IN |
| Collapse Δp | 20 bar |
| Bypass setting | 3.0 bar |
| Seals | NBR |
| Temperature range | -30°C +100°C |

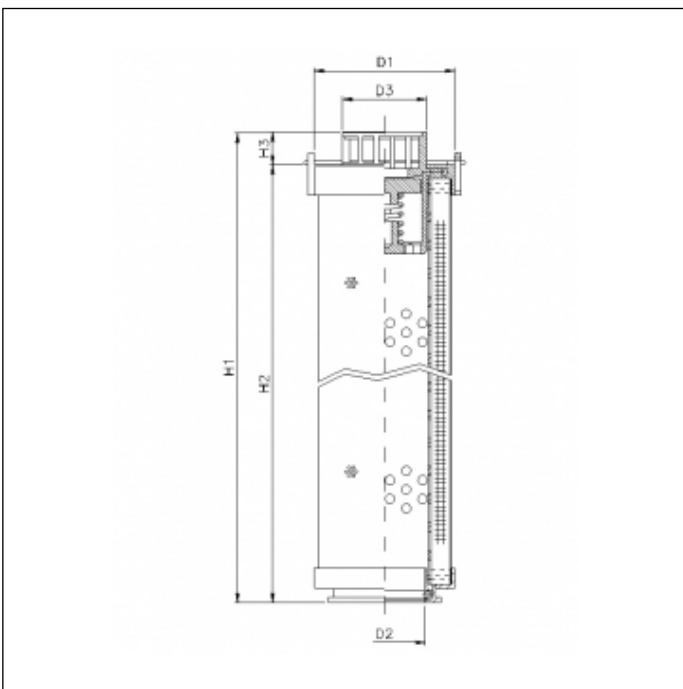

OVERALL DIMENSIONS

| | |
|----|----------|
| D1 | 60,0 mm |
| D2 | 34,0 mm |
| D3 | 36,0 mm |
| H1 | 296,0 mm |
| H2 | 282,0 mm |
| H3 | 14,0 mm |