


DLD60F03B

printed on: 07-06-2026



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	$<4 \mu\text{m}_{(c)} \beta_x \geq 200$
Efficiency 1	$5 \mu\text{m}_{(c)} \beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	210 bar
Seals	NBR
Temperature range	$-30^{\circ}\text{C} +100^{\circ}\text{C}$

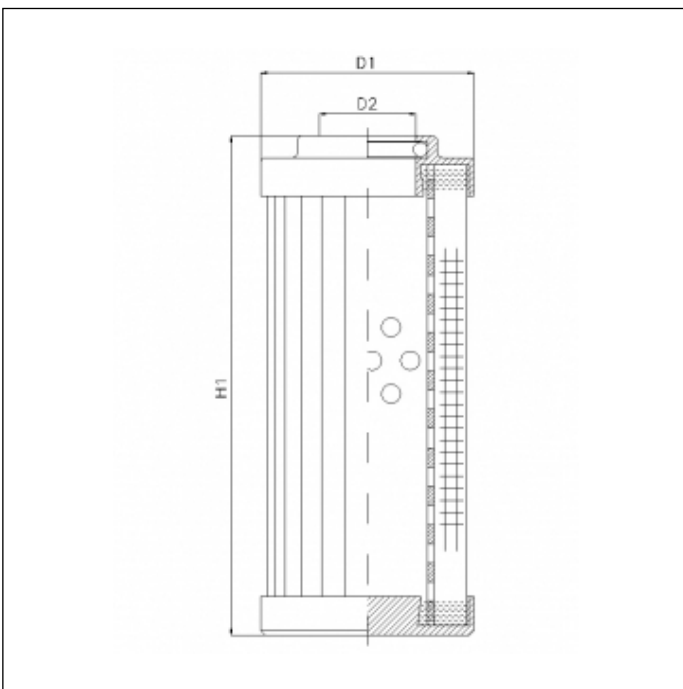

OVERALL DIMENSIONS

D1	44,5 mm
D2	22,1 mm
H1	109,0 mm

Technical information may change without notice. Image and drawing are representative only