

STF Series

Return Line Filters

Max. 500 l/min - 10 bar



When safety is a must

Where the use of aluminium is restricted in applications such as marine and industrial, the STF return line filter series provides an ideal solution to hydraulic system designers and specifiers.



Contact Information: Product Features:

Parker Hannifin
Hydraulic Filter Division Europe

**European Product
Information Centre**
Freephone: 00800 27 27 5374
**(from AT, BE, CH, CZ, DE, EE, ES,
FI, FR, IE, IT, PT, SE, SK, UK)**
filtrationinfo@parker.com

www.parkerhfde.com

- 'In-to-out' filtration design means contaminated oil cannot leak back into the system
- magnetic pre-filtration
- Cast iron filter head assembly
- multiple port configuration
- flows up to 500 L/min
- 10 bar maximum working pressure
- optional airtight diffusers
- *LEIF*® low environmental impact filter elements as standard

STF Series

Return Line Filters

Features & Benefits


Features	Advantages	Benefits
10 bar rated filter	Can be utilised for severe return line applications	Reduced downtime due to premature filter failures
Cast iron head	Robust design	Convenient and effective solution for applications where aluminium is not allowed
LEIF® elements	Patented element safeguards the use of genuine parts	Guaranteed quality of filtration Contributes to ISO 14001 certification
Magnetic pre-filtration	Removes ferrous particles, even during bypass conditions	Improved fluid cleanliness levels Extended element life time
In-to-Out filtration	All captured contamination retains inside the element	No recontamination of system during change of elements
High level of customisation	Dedicated system-matched solutions can be easily made available	Improved integration of filter in system combined with lower initial system costs
Quick response bypass with low hysteresis	Reduction of bypass period due to low hysteresis Only a small part of the total flow is bypassing the element	Improved protection of system
Standard or customised funnel	Ensures that oil enters the tank under the oil level	Significant reduction of oil foaming

Typical Applications

- Marine power pack
- Steel mills
- Mining equipment
- Drilling equipment

The Parker Filtration STF Series Return Line Filters

STF Tank top mounted return filters feature pre-filtration by means of a magnet column and a bypass with low hysteresis. Thanks to the “In-to-Out” filtration principle, contaminated oil cannot leak back into the system. The STF filter has a casted iron filter head assembly, making it ideal for marine and industrial applications where the use of aluminium is restricted. The filter head with multiple ports, capable of handling flow up to 500 l/min at 10 bar working pressure, represents an easy and effective way of integrating return line filtration with power packs. Optional airtight diffusers are standard to avoid air ingress in the return line.

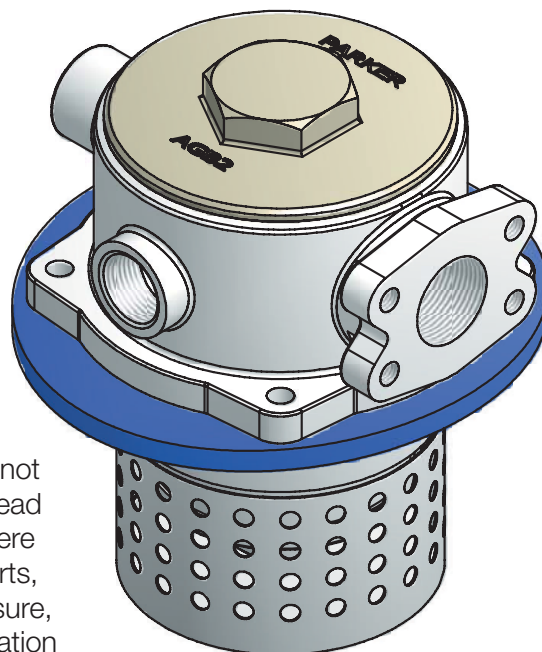

Specification

Operation pressure:
Max. 10 bar

Assembly
Tank top mounted

Connections
SAE flange
Threaded BSP ports

Filter housing and cover
Cast Iron (GGG40)

Seal material:
Nitrile, Fluorelastomer

Operating temperature:
Seal material Nitrile: -40°C to +100°C
Seal material Fluorelastomer: -20°C to +120°C

Bypass setting
Opening pressure 0,8 / 1,5 / 2,0 bar

Degree of filtration
Determined by multipass test in accordance to ISO16889

Flow fatigue characteristics
Filter media is supported so that the optimum fatigue life is achieved

Filtration media

Microglass III and Ecoglass III for *LEIF*® elements
Also available 10 µm cellulose and 40 µm stainless steel mesh

Element collapse pressure
10 bar (ISO 2941)

Pressure indicator options
Setting 0,7 and 1,2 bar
Visual pressure gauge
Electrical pressure switch

Options

Diffuser type P (straight pipe, no perforated plate area)
Diffuser type T (with closed diffuser end cap and with perforated plate area, recommended when oil entry in the reservoir is close to the bottom or to ensure oil enters the reservoir under the oil level)




Magnetic pack
Standard, only not included for STF 400 and 500

Filter element

LEIF® element with reusable metal element sleeve
Optional conventional style element with steel end caps
The *LEIF*® element is patented and safeguards the use of genuine parts.


Note:

LEIF® element can be used with mineral and HEES type oils
For other fluids consult Parker Filtration
LEIF® element contributes to ISO14001 quality standards

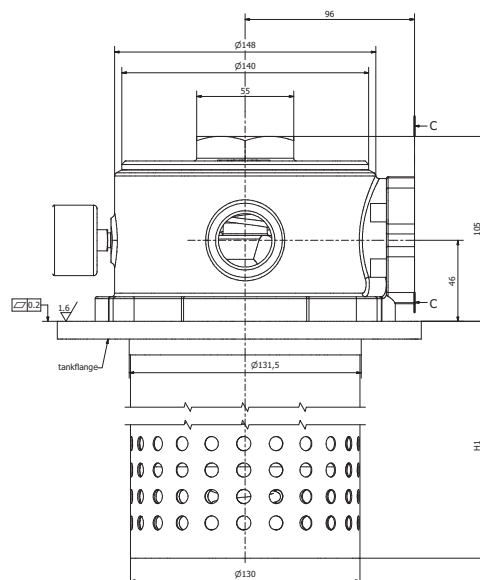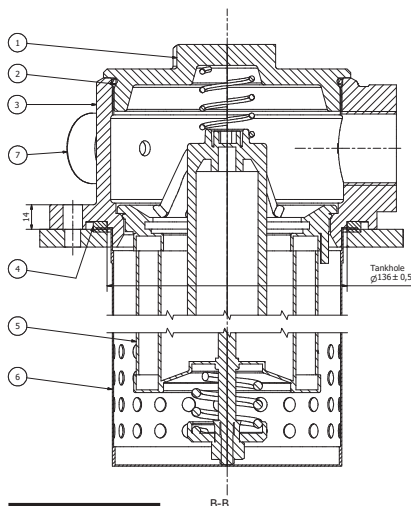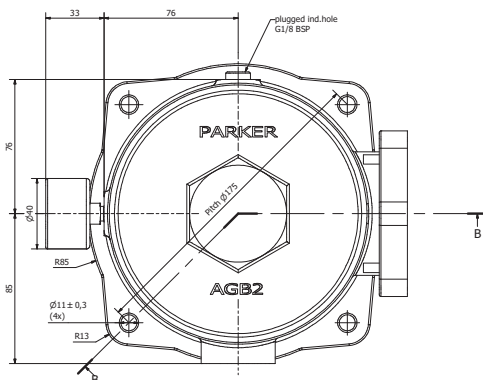

STF Without Diffuser		
STF Length	Type	H1
6	STF170	223
7	STF230	303
8	STF300	508
9	STF400	523
10	STF500	563

STF With Diffuser		
STF Length	Type	H1
6	STF170	305
7	STF230	305
8	STF300	510
9	STF400	525
10	STF500	575

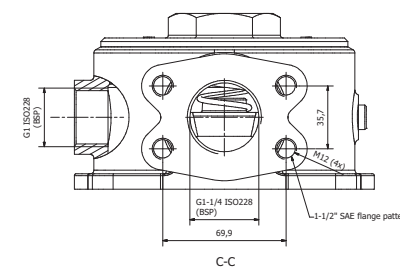

STF Series

Return Line Filters


Pressure Drop Curves

The recommended level of the initial pressure drop for low pressure filters is max 0.5 bar.


If the medium used has a viscosity different from 32cSt, pressure drop over the filter can be estimated as follows:

$$\Delta p = (\Delta p_{32} \times \text{viscosity of medium used}) / 32\text{cSt}.$$


STF170 (Element length code 6)

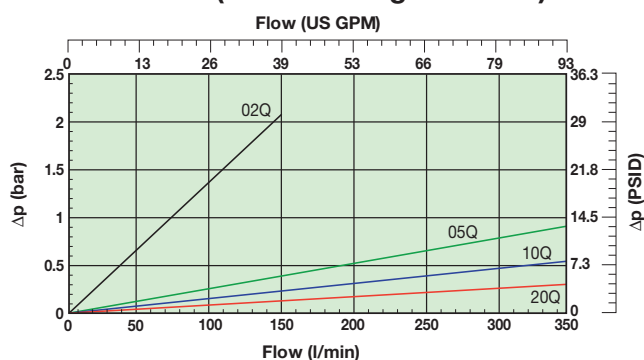


STF230 (Element length code 7)

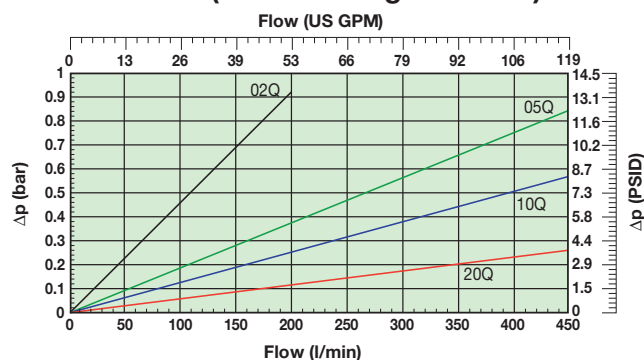


STF300 (Element length code 8)

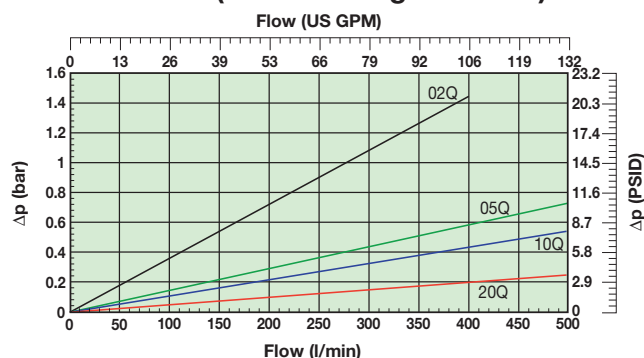


STF400 (Element length code 9)

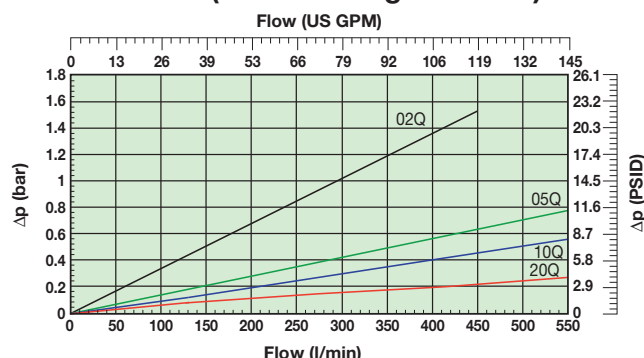


STF500 (Element length code 10)

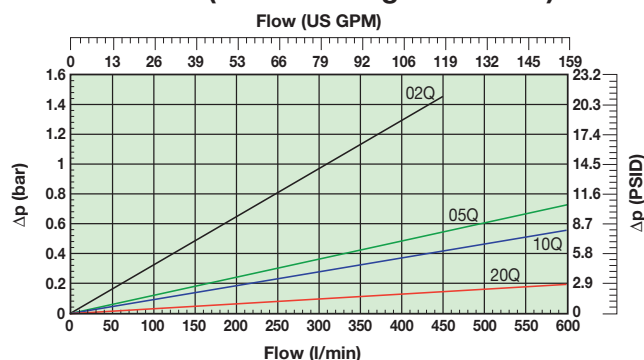


**STF170 (Element length code 6)
Cellulose & stainless steel media**

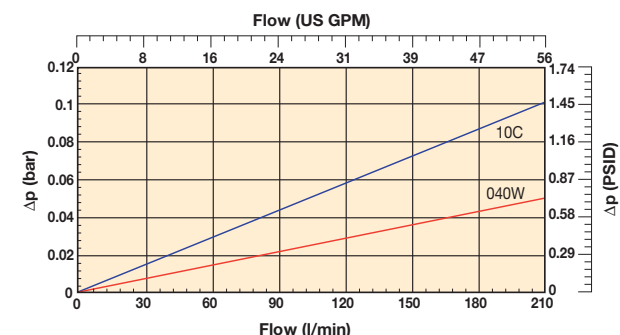

**STF230 (Element length code 7)
Cellulose & stainless steel media**

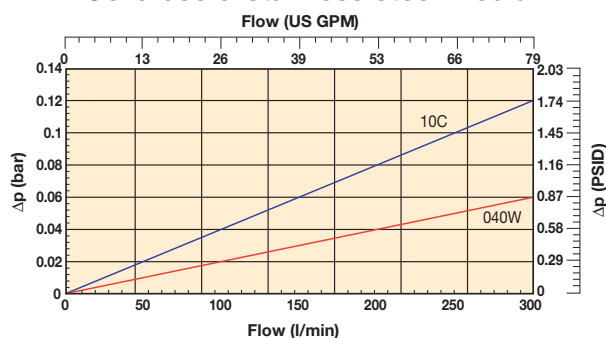


**STF300 (Element length code 8)
Cellulose & stainless steel media**

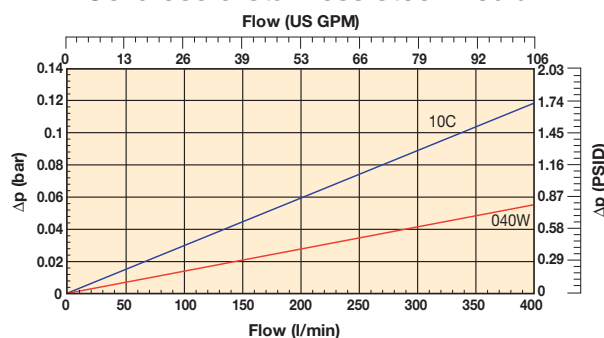

STF Series

Return Line Filters

Indicator PS NO/NC pressure switch

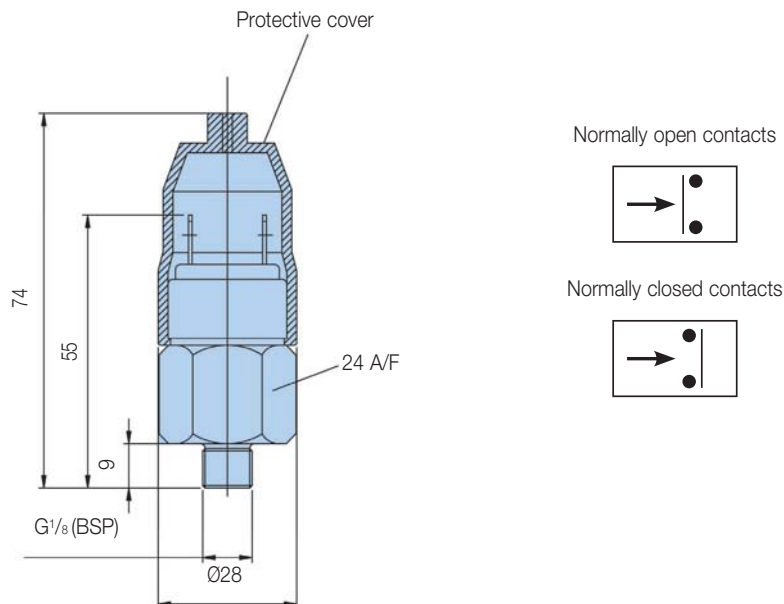

Specifications	
Electrical rating	42V / 2A
Thread connection	G1/8"
Electrical connection	AMP terminal 6.3x0.8
Protection	IP65 (terminal IP00)
Switch type	NO or NC
Indicator setting	1.2 bar (0.7 bar on request)
Code	FMUS2EBMG02L (NO type switch)
	FMUS3EBMG02L (NC type switch)

Visual indicator	Code
1.2 bar	FMUG2EBPG02L

LEIF Spare Element table				
	2 micron	5 micron	10 micron	20 micron
STF170 Part number spare element	937827Q	937848Q	937853Q	937874Q
STF230 Part number spare element	937828Q	937847Q	937854Q	937873Q
STF300 Part number spare element	937829Q	937846Q	937855Q	937872Q
STF400 Part number spare element	937830Q	937845Q	937856Q	937871Q
STF500 Part number spare element	937831Q	937844Q	937857Q	937870Q

Conventional Spare Element table Microglass III Media						
	10 micron cellulose	2µ Microglass III	5µ Microglass III	10µ Microglass III	20µ Microglass III	40 micron stainless steel mesh
TTF170 Part number spare element	937725	937747Q	937758Q	937783Q	937794Q	937816
TTF230 Part number spare element	937726	937746Q	937759Q	937782Q	937795Q	937815
TTF300 Part number spare element	937727	937745Q	937760Q	937781Q	937796Q	937814

Ordering Information

Standard products table										
Part Number	Flow (l/min)	Model Number	Element Length	Media Rating (u)	Seals	Indicator	Bypass Setting	Ports	Included Options	Replacement Elements
STF810QLBP2ELC24G	300	STF300	8	10	Nitrile	Plugged	1.5 Bar	11/2"SAE-flange	Airtight funnel typeT	937855Q
STF820QLBP2ELC24G	300	STF300	8	20	Nitrile	Plugged	1.5 Bar	11/2"SAE-flange	Airtight funnel typeT	937872Q
STF1010QLBP2ELC24G	500	STF500	10	10	Nitrile	Plugged	1.5 Bar	11/2"SAE-flange	Airtight funnel typeT	937857Q
STF1020QLBP2ELC24G	500	STF500	10	20	Nitrile	Plugged	1.5 Bar	11/2"SAE-flange	Airtight funnel typeT	937870Q

Product configurator

Configurator example of a STF Series filter

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	Box 8
STF	8	05QL	B	S2	E	LC24	G

Box 1	Box 2	Box 3																																																																		
<table><tr><th>Code</th></tr><tr><td>STF</td></tr></table>	Code	STF	<table><tr><th colspan="2">Filter type</th></tr><tr><th>Housing</th><th>Code</th></tr><tr><td>STF 2-170</td><td>6</td></tr><tr><td>STF 2-230</td><td>7</td></tr><tr><td>STF 2-300</td><td>8</td></tr><tr><td>STF 2-400</td><td>9</td></tr><tr><td>STF 2-500</td><td>10</td></tr></table>	Filter type		Housing	Code	STF 2-170	6	STF 2-230	7	STF 2-300	8	STF 2-400	9	STF 2-500	10	<table><tr><th colspan="7">Degree of filtration</th></tr><tr><th rowspan="4">Element media</th><th>Nominal</th><th colspan="4">Filtration fineness absolute</th><th rowspan="4">Stainless steel mesh</th></tr><tr><th>Cellulose</th><th colspan="4">LEIF®</th></tr><tr><th></th><th colspan="4">Q3 glassfibre βx(c) >200</th></tr><tr><th>10µm</th><th>Q02 (2micron)</th><th>Q05 (5micron)</th><th>Q010 (10micron)</th><th>Q020 (20micron)</th></tr><tr><td></td><td></td><td>Q02 (2micron)</td><td>Q05 (5micron)</td><td>Q010 (10micron)</td><td>Q020 (20micron)</td><td>40µm</td></tr><tr><td>Disposable element</td><td>10C</td><td>02Q</td><td>05Q</td><td>10Q</td><td>20Q</td><td>040W</td></tr><tr><td>LEIF® element</td><td></td><td>02QL</td><td>05QL</td><td>10QL</td><td>20QL</td><td></td></tr></table>	Degree of filtration							Element media	Nominal	Filtration fineness absolute				Stainless steel mesh	Cellulose	LEIF®					Q3 glassfibre βx(c) >200				10µm	Q02 (2micron)	Q05 (5micron)	Q010 (10micron)	Q020 (20micron)			Q02 (2micron)	Q05 (5micron)	Q010 (10micron)	Q020 (20micron)	40µm	Disposable element	10C	02Q	05Q	10Q	20Q	040W	LEIF® element		02QL	05QL	10QL	20QL	
Code																																																																				
STF																																																																				
Filter type																																																																				
Housing	Code																																																																			
STF 2-170	6																																																																			
STF 2-230	7																																																																			
STF 2-300	8																																																																			
STF 2-400	9																																																																			
STF 2-500	10																																																																			
Degree of filtration																																																																				
Element media	Nominal	Filtration fineness absolute				Stainless steel mesh																																																														
	Cellulose	LEIF®																																																																		
		Q3 glassfibre βx(c) >200																																																																		
	10µm	Q02 (2micron)	Q05 (5micron)	Q010 (10micron)	Q020 (20micron)																																																															
		Q02 (2micron)	Q05 (5micron)	Q010 (10micron)	Q020 (20micron)	40µm																																																														
Disposable element	10C	02Q	05Q	10Q	20Q	040W																																																														
LEIF® element		02QL	05QL	10QL	20QL																																																															

Box 4	Box 5	Box 6																																						
<table><tr><th colspan="2">Seal type</th></tr><tr><th>Seal material</th><th>Code</th></tr><tr><td>Nitrile</td><td>B</td></tr><tr><td>Fluorelastomer</td><td>V</td></tr></table>	Seal type		Seal material	Code	Nitrile	B	Fluorelastomer	V	<table><tr><th colspan="2">Indicator</th></tr><tr><th></th><th>Code</th></tr><tr><td>Pressure gauge , setting 1.2 bar, G1/8</td><td>G2</td></tr><tr><td>Pressure switch 42V, 1.2 bar setting, NO with G1/8 BSP</td><td>S2</td></tr><tr><td>Pressure switch 42V, 1.2 bar setting, NC with G1/8 BSP</td><td>S3</td></tr><tr><td>Pressure switch 250V, NO/NC with G1/8</td><td>S4</td></tr><tr><td>No indicator, indicator ports L + R plugged</td><td>P2</td></tr><tr><td>Other settings for indicators / gauges on request</td><td>on request</td></tr></table>	Indicator			Code	Pressure gauge , setting 1.2 bar, G1/8	G2	Pressure switch 42V, 1.2 bar setting, NO with G1/8 BSP	S2	Pressure switch 42V, 1.2 bar setting, NC with G1/8 BSP	S3	Pressure switch 250V, NO/NC with G1/8	S4	No indicator, indicator ports L + R plugged	P2	Other settings for indicators / gauges on request	on request	<table><tr><th colspan="2">Bypass valve</th></tr><tr><th>Bypass valve</th><th>Code</th></tr><tr><td>0.8 bar</td><td>B</td></tr><tr><td>1.5 bar</td><td>E</td></tr><tr><td>2.0 bar for STF series</td><td>H</td></tr><tr><td>Blocked bypass</td><td>X</td></tr><tr><td>Other bypass settings</td><td>on request</td></tr></table>	Bypass valve		Bypass valve	Code	0.8 bar	B	1.5 bar	E	2.0 bar for STF series	H	Blocked bypass	X	Other bypass settings	on request
Seal type																																								
Seal material	Code																																							
Nitrile	B																																							
Fluorelastomer	V																																							
Indicator																																								
	Code																																							
Pressure gauge , setting 1.2 bar, G1/8	G2																																							
Pressure switch 42V, 1.2 bar setting, NO with G1/8 BSP	S2																																							
Pressure switch 42V, 1.2 bar setting, NC with G1/8 BSP	S3																																							
Pressure switch 250V, NO/NC with G1/8	S4																																							
No indicator, indicator ports L + R plugged	P2																																							
Other settings for indicators / gauges on request	on request																																							
Bypass valve																																								
Bypass valve	Code																																							
0.8 bar	B																																							
1.5 bar	E																																							
2.0 bar for STF series	H																																							
Blocked bypass	X																																							
Other bypass settings	on request																																							

Box 7	Box 8																				
Filter connection	Options																				
<table> <tr> <th>Ports</th><th>Code</th></tr> <tr> <td>1 1/2" SAE-3000 PSI + G1" (2nd port)</td><td>LC24</td></tr> <tr> <td>G1 1/4" + G1" (2nd port)</td><td>GL24</td></tr> </table>	Ports	Code	1 1/2" SAE-3000 PSI + G1" (2nd port)	LC24	G1 1/4" + G1" (2nd port)	GL24	<table> <tr> <th>Options</th><th>Code</th></tr> <tr> <td>No diffuser required</td><td>1</td></tr> <tr> <td>Diffuser type T with perforated plate area</td><td>3</td></tr> <tr> <td>Diffuser type P without perforated plate area</td><td>4</td></tr> <tr> <td>Airtight diffuser type T with perforated plate area</td><td>G</td></tr> <tr> <td>Airtight diffuser type P without perforated plate area</td><td>H</td></tr> <tr> <td>Other combinations</td><td>on request</td></tr> </table>	Options	Code	No diffuser required	1	Diffuser type T with perforated plate area	3	Diffuser type P without perforated plate area	4	Airtight diffuser type T with perforated plate area	G	Airtight diffuser type P without perforated plate area	H	Other combinations	on request
Ports	Code																				
1 1/2" SAE-3000 PSI + G1" (2nd port)	LC24																				
G1 1/4" + G1" (2nd port)	GL24																				
Options	Code																				
No diffuser required	1																				
Diffuser type T with perforated plate area	3																				
Diffuser type P without perforated plate area	4																				
Airtight diffuser type T with perforated plate area	G																				
Airtight diffuser type P without perforated plate area	H																				
Other combinations	on request																				

Note: STFsize 2-400 and 2-500 are standard supplied without magnets

Degree of filtration						Media code
Average filtration beta ratio β (ISO 16889) / particle size μm [c]						
βx(c)=2	βx(c)=10	βx(c)=75	βx(c)=100	βx(c)=200	βx(c)=1000	
% efficiency, based on the above beta ratio (βx)						
50.0%	90.0%	98.7%	99.0%	99.5%	99.9%	
N/A	N/A	N/A	N/A	N/A	4.5	
N/A	N/A	4.5	5	6	7	02Q/02QL
N/A	N/A	4.5	5	6	7	05Q/05QL
N/A	6	8.5	9	10	12	10Q/10QL
6	11	17	18	20	22	20Q/20QL

Highlights Key (Denotes part number availability)

123	Item is standard
123	Item is standard green option
123	Item is semi standard
123	Item is non standard

Note: Standard items are in stock, semi standard items are available within four weeks