



Accessories (separate order)

The following is required for the parameterization via PC:	CANopen	Profibus DP
1 interface converter (USB)	VT-ZKO-USB/CA-1-1X/V0/0 Material no.: R901071963	VT-ZKO-USB/P-1-1X/V0/0 Material no.: R901071962
2 Commissioning software	WINPED Download from www.boschrexroth.de \IAC	
3 Connection cable, 3 m	D-Sub / M12, coding A Material no.: R900751271	D-Sub / M12, coding B Material no.: R901078053

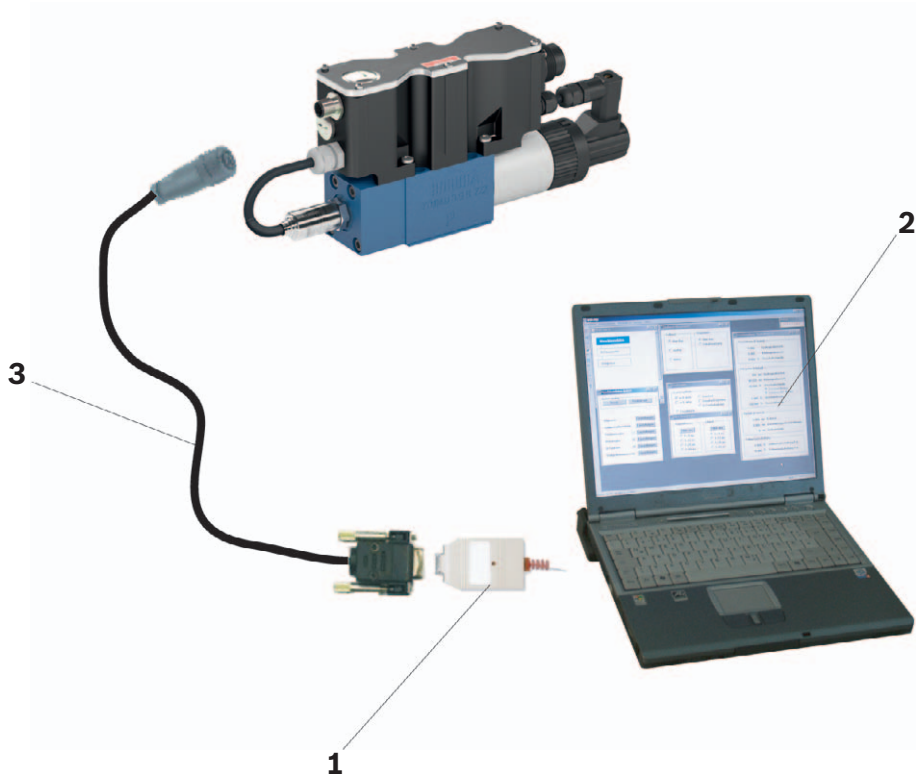

Accessories (separate order)**Port X1**

Mating connector for X1	Dimensions	Material number
Mating connector according to DIN EN 17520-804 (11-pole + PE), plastic variant	Without cable (assembly kit)	R900884671
	With cable set 2 x 5 m 12-pole	R900032356
	With cable set 2 x 20 m 12-pole	R900860399

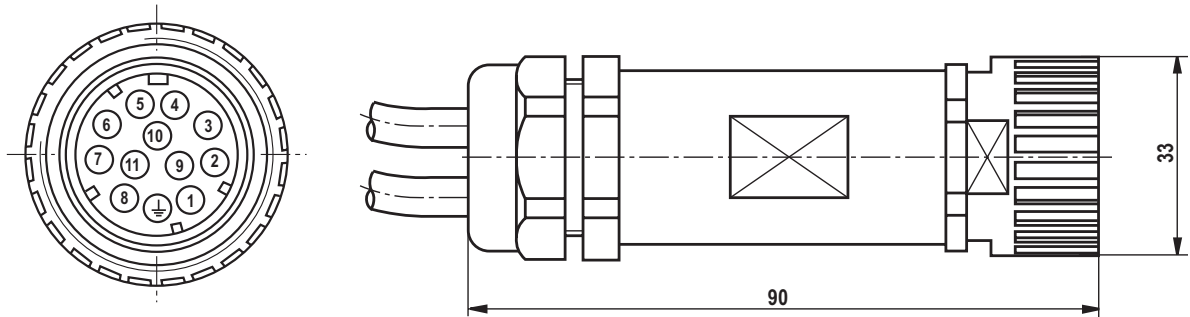**CAN bus (A coding)**

Plug-in connector for X2	View, dimensions	Material number
Round connector, processable, 5-pole, M12 x 1 Straight mating connector in metal design	 (line diameter 6 ... 8 mm)	R901076910

Profibus (B coding)

Plug-in connector for X2 and X3	View, dimensions	Material number
X2 Round connector, processable, 5-pole, M12 x 1 Straight mating connector in metal design	 (line diameter 6 ... 8 mm)	R901075545
X3 Round connector, processable, 5-pole, M12 x 1 Straight mating connector in metal design	 (line diameter 6 ... 8 mm)	R901075550

Protective cap

Protective cap M12	Version	Material number
		R901075563