
R102G25C

printed on: 17-10-2026



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	20 $\mu m_{(c)}$ $\beta x \geq 200$
Efficiency 1	22 $\mu m_{(c)}$ $\beta x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	10 bar
Bypass setting	3.0 bar
Seals	NBR
Temperature range	-30°C +100°C

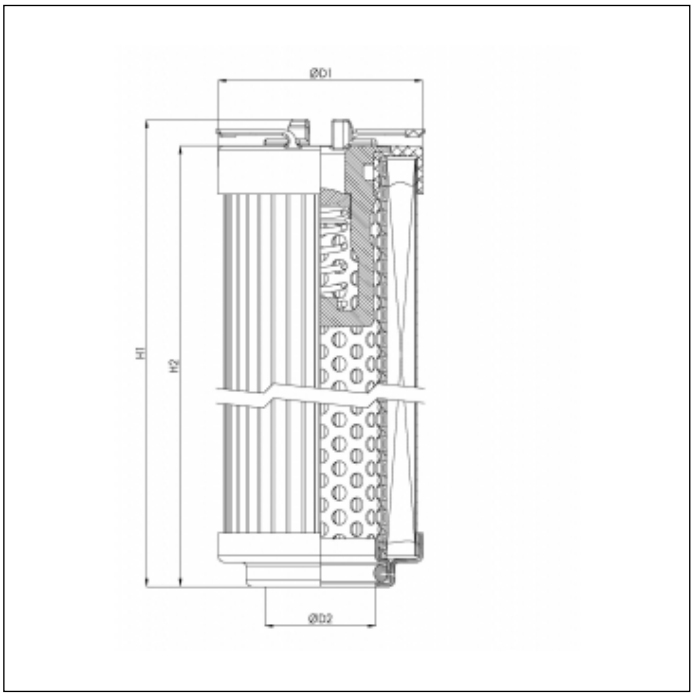

OVERALL DIMENSIONS

D1	42,0 mm
D2	22,8 mm
H1	169,5 mm
H2	164,0 mm

Technical information may change without notice. Image and drawing are representative only