
RHR2600G10B3/AB1

printed on: 19-11-2026



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	10 $\mu m_{(c)}$ $\beta x \geq 200$
Efficiency 1	12 $\mu m_{(c)}$ $\beta x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	20 bar
Bypass setting	3.0 bar
Seals	NBR
Temperature range	-30°C +100°C

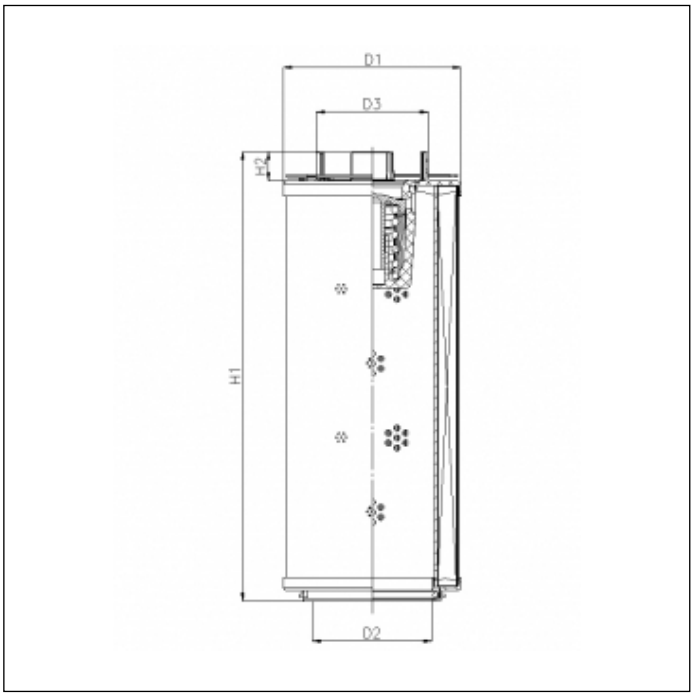

OVERALL DIMENSIONS

D1	143,5 mm
D2	96,5 mm
D3	90,5 mm
H1	921,0 mm
H2	23,5 mm

Technical information may change without notice. Image and drawing are representative only