
WG427

printed on: 19-11-2026



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	10 $\mu m_{(c)}$ $\beta x \geq 200$
Efficiency 1	12 $\mu m_{(c)}$ $\beta x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	30 bar
Seals	FKM
Temperature range	-25°C +120°C

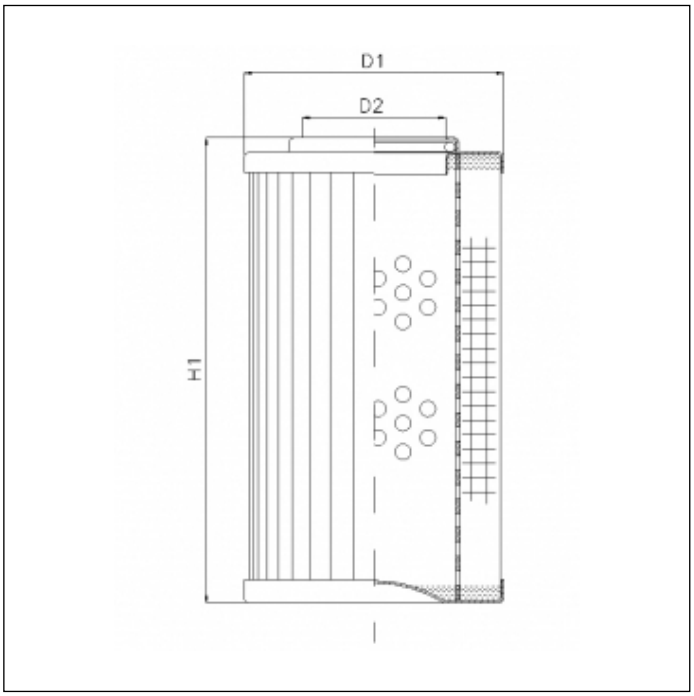

OVERALL DIMENSIONS

D1	69,0 mm
D2	34,2 mm
H1	190,0 mm

Technical information may change without notice. Image and drawing are representative only