
# RHR1300G03B0/AB1

printed on: 19-11-2026



## TECHNICAL INFO

| | |
|---|---|
| Media type | INORGANIC FIBERGLASS |
| Efficiency | <4 $\mu m_{(c)}$ βx ≥ 200 |
| Efficiency 1 | 5 $\mu m_{(c)}$ βx ≥ 1000 |
| Flow direction | OUT-IN |
| Collapse Δp | 20 bar |
| Seals | NBR |
| Temperature range | -30°C +100°C |

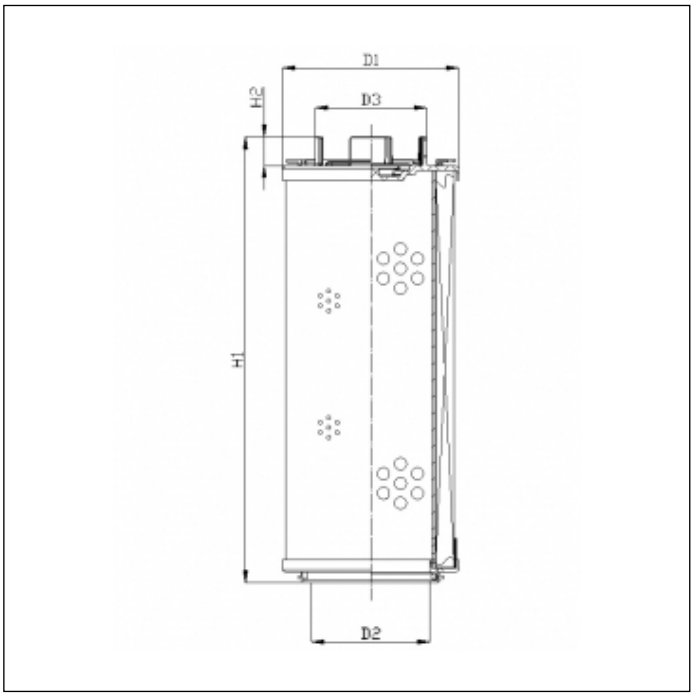


## OVERALL DIMENSIONS

| | |
|---|---|
| D1 | 143,5 mm |
| D2 | 96,5 mm |
| D3 | 90,5 mm |
| H1 | 483,0 mm |
| H2 | 23,5 mm |

Technical information may change without notice. Image and drawing are representative only