
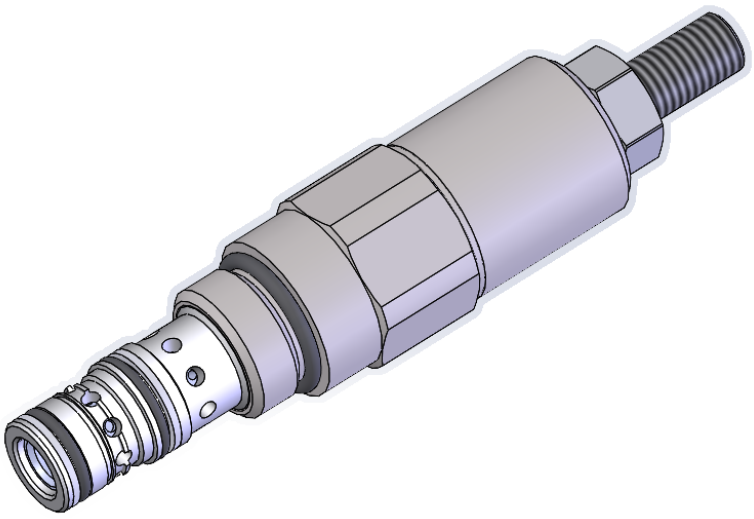


Mechanical

01232
Direct Acting Pressure Reducing Valve


CARTRIDGE SAE 10




Technical data

Max flow	30,00 l/min
Max working pressure	350,00 bar
Working pressure port 2	350,00 bar
Working pressure in port 1	150,00 bar
Working pressure port 3	1,00 bar
Leakage with oil ISO46	70,00 cc/min
Seal material	NBR and PTFE
Valve installation torque	50,00 Nm
Weight	0,31 Kg
Tamper proof code	4029250280
Surface treatment	Zinc plating
Cavity code	C330000
Body family code	171312
Valve hex size	27,00 mm


Cross section

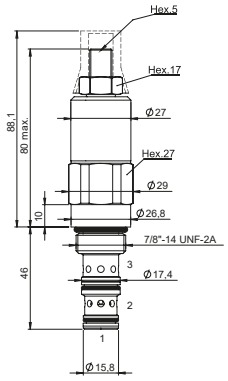

Cavity details

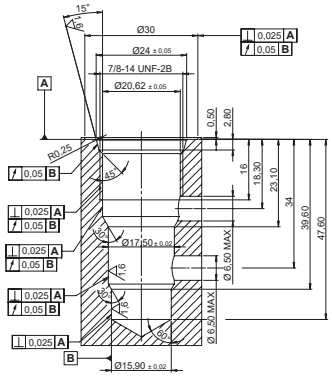

Curves

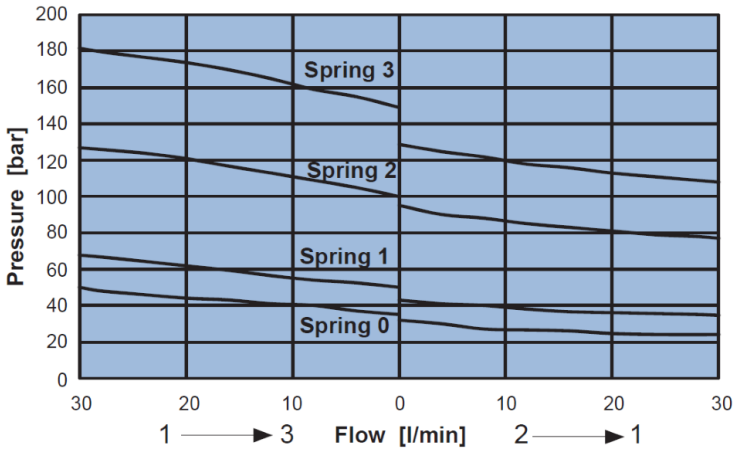

Ordering code

