
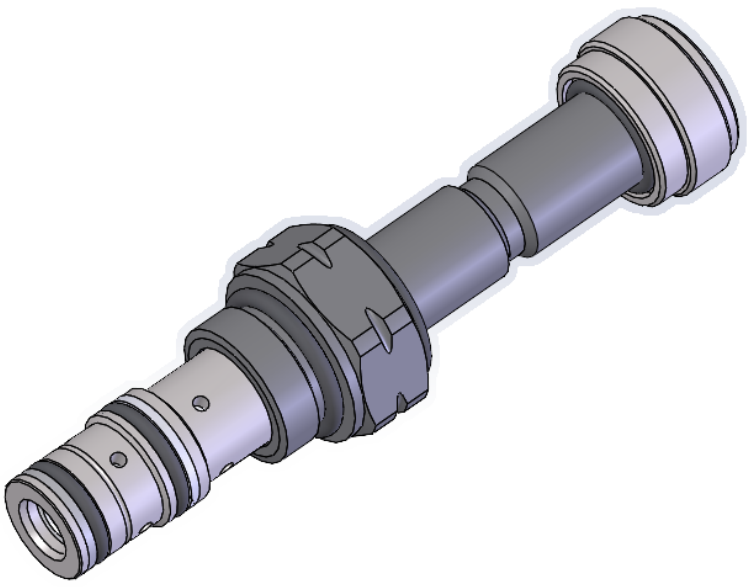


Solenoid valves

01722
Electro-Proportional Pressure Reducing Valve


CARTRIDGE SAE 08




Technical data

Max flow	4,00 l/min
Max working pressure	210,00 bar
Working pressure port 2	210,00 bar
Working pressure in port 1	30,00 bar
Working pressure port 3	1,00 bar
Leakage with oil ISO46	150,00 cc/min
Seal material	NBR and PTFE
Max corrent 12VDC	1800 mA
Max corrent 24VDC	900 mA
PWM	120 Hz
Hysteresis	5%
Valve installation torque	30,00 Nm
Coil nut torque	5,00 Nm
Weight	0,40 Kg
Surface treatment	Zinc plating
Cavity code	C320000
Body family code	171212
Coil family codes	09400
Valve hex size	24,00 mm


Cross section

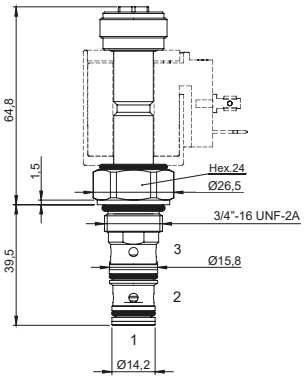

Cavity details

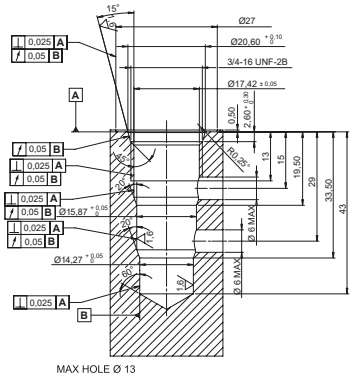

Curves

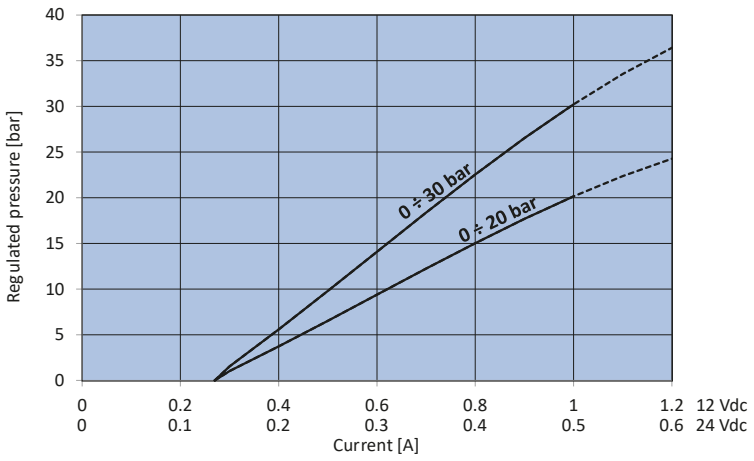

Coil 09400 to be ordered separately

Ordering code

