
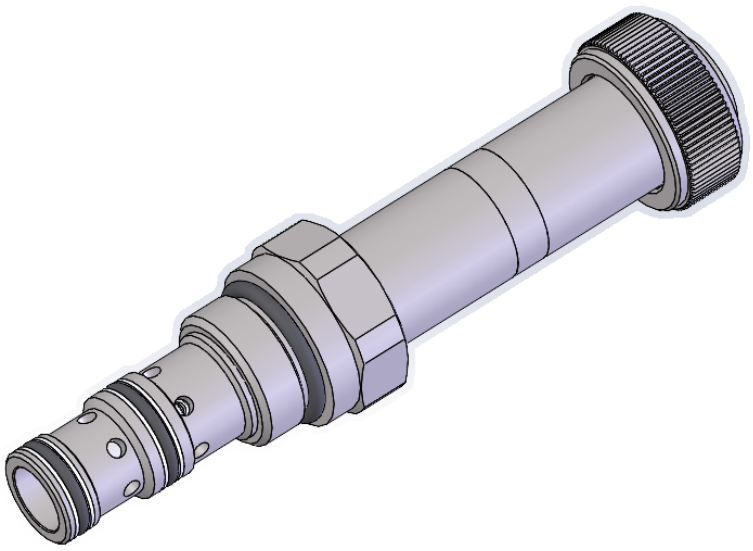


Solenoid valves

03631
3 Way Flow Regulator Valve


CARTRIDGE SAE 10




Technical data

Max flow	50,00 l/min
Max working pressure	250,00 bar
Leakage with oil ISO46	150,00 cc/min
Seal material	NBR and PTFE
Max corrent 12VDC	1800 mA
Max corrent 24VDC	900 mA
PWM	120 Hz
Hysteresis	5%
Valve installation torque	40,00 Nm
Coil nut torque	5,00 Nm
Weight	0,56 Kg
Surface treatment	Zinc plating
Cavity code	C330000
Body family code	171312
Coil family codes	09800
Valve hex size	27,00 mm


Cross section

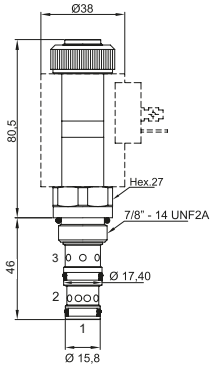

Cavity details

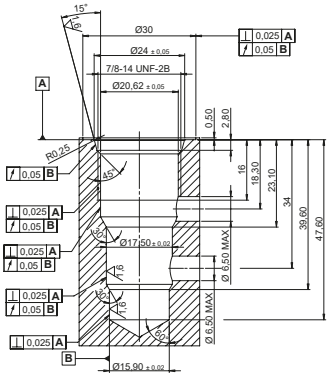



Curves

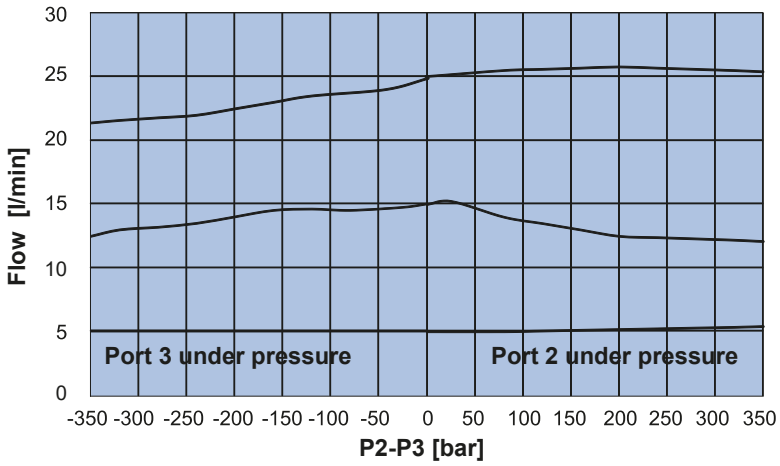

Coil 09800 to be ordered separately

Ordering code

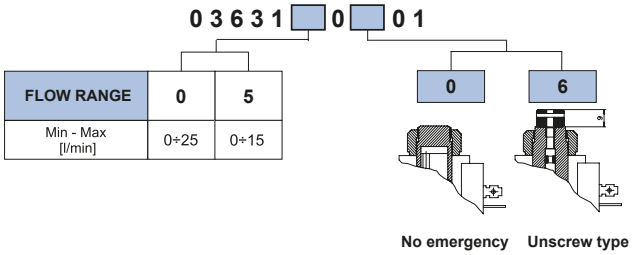

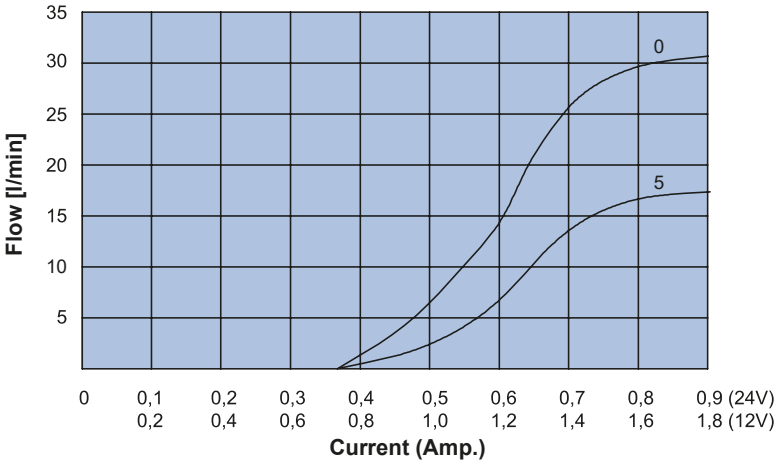
35
30
25
20
15
10
5
Flow [l/min]
0
5
0
0,1
0,2
0,2
0,4
0,3
0,6
0,4
0,8
0,5
1,0
0,6
1,2
0,7
1,4
0,8
1,6
0,9 (24V)
1,8 (12V)
Current (Amp.)