
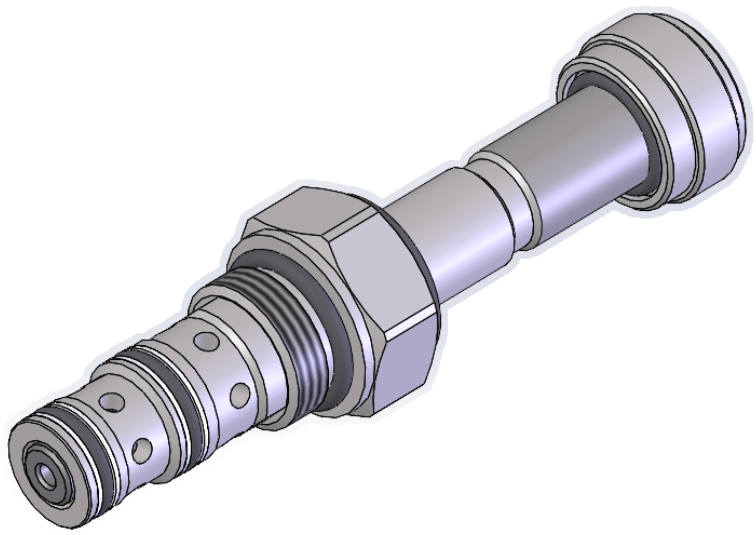


Solenoid valves

04023
3 Way 2 Position Electric Spool Valve, Direct Acting


CARTRIDGE SAE 08




Technical data

Max flow	15,00 l/min
Flow port 1	7,00 l/min
Flow port 2	15,00 l/min
Flow port 3	15,00 l/min
Max working pressure	250,00 bar
Leakage with oil ISO46	40,00 cc/min
Seal material	NBR and PTFE
Valve installation torque	30,00 Nm
Coil nut torque	5,00 Nm
Weight	0,35 Kg
Surface treatment	Zinc plating
Cavity code	C320000
Body family code	171212
Coil family codes	09400
Valve hex size	24,00 mm


Cross section

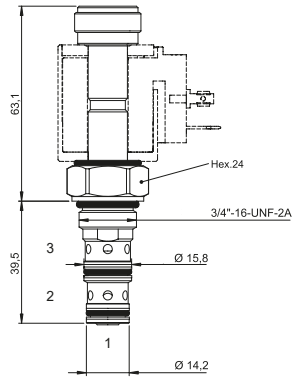

Cavity details

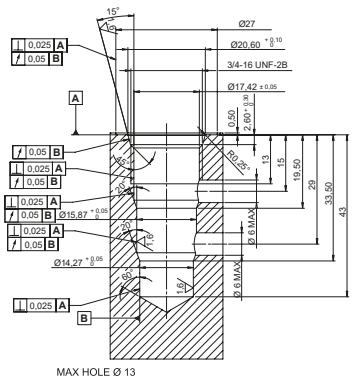

Curves

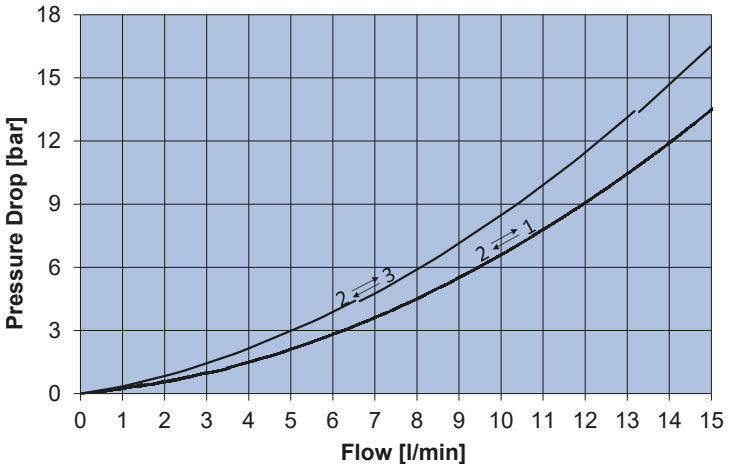

Coil 09400 to be ordered separately

Ordering code

0 4 0 2 3 0 0 ☐ 0 0

