
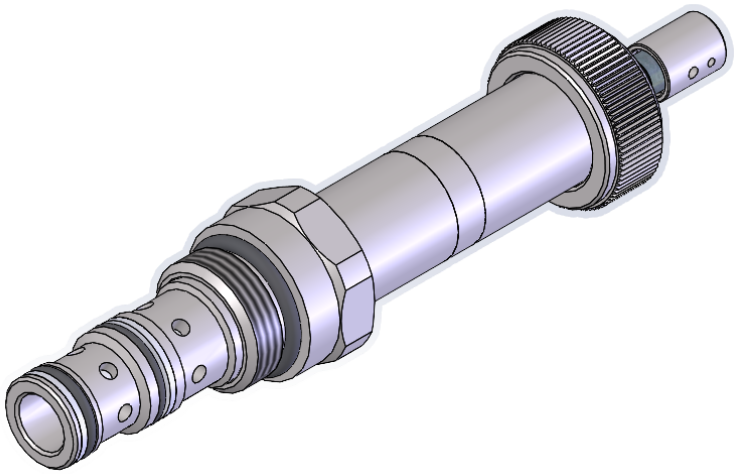



Solenoid valves

04032
3 Way 2 Position Electric Spool Valve, Direct Acting


CARTRIDGE SAE 10



Cross section

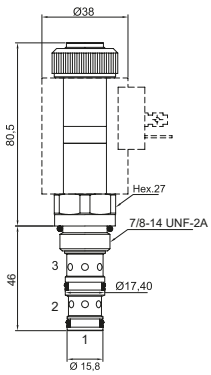


Cavity details

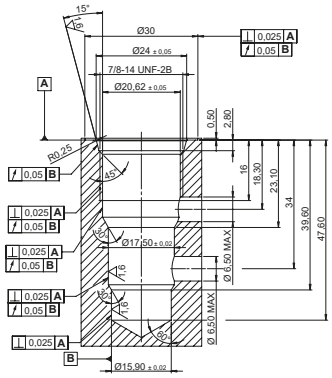

Technical data

Max flow	20,00 l/min
Max working pressure	250,00 bar
Leakage with oil ISO46	100,00 cc/min
Seal material	NBR and PTFE
Valve installation torque	40,00 Nm
Coil nut torque	5,00 Nm
Weight	0,56 Kg
Surface treatment	Zinc plating
Cavity code	C330000
Body family code	171312
Coil family codes	09801
Valve hex size	27,00 mm

Curves

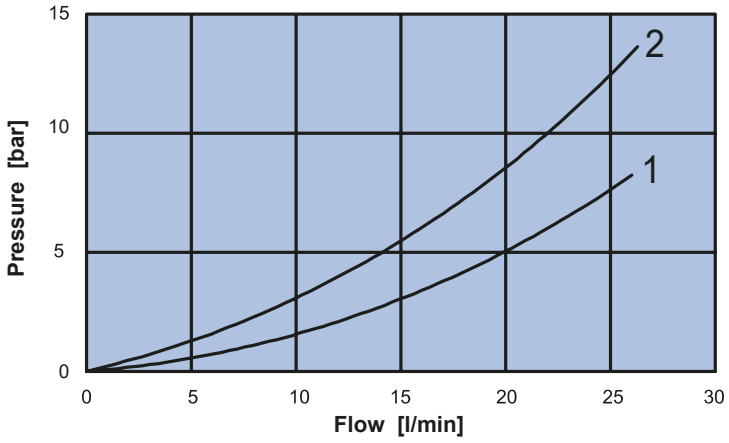



1 = Pressure drop from 2 in 1
2 = Pressure drop from 3 in 2

Coil 09801 to be ordered separately

Ordering code

0 4 0 3 2 0 0 □ 0 0

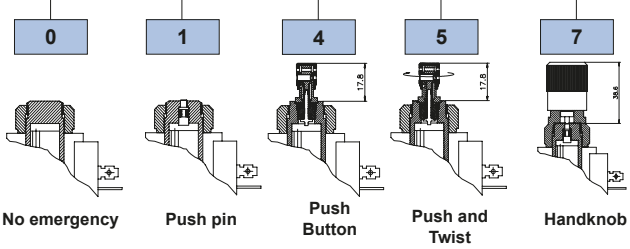

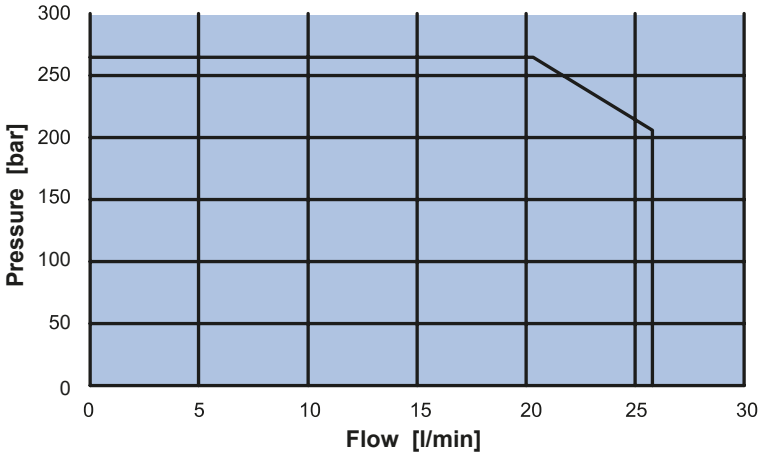

Application limits from 2 in 1 and 2 in 3