
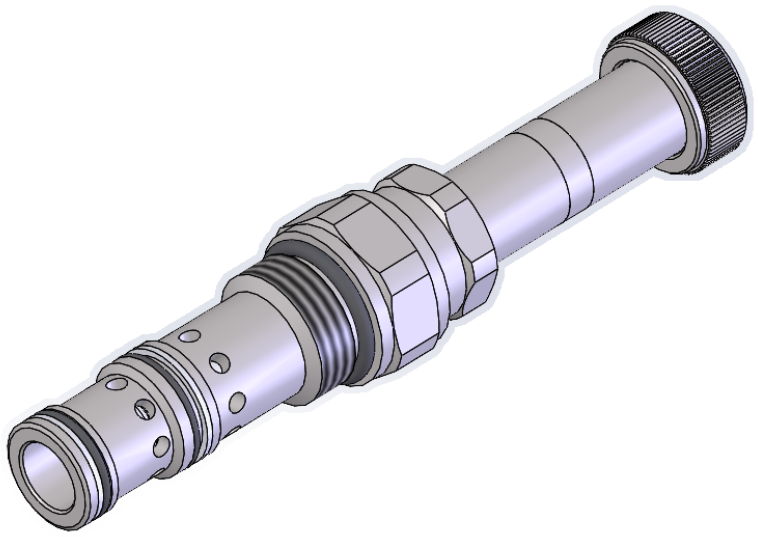


Solenoid valves

04042
3 Way 2 Position Electric Spool Valve, Direct Acting


CARTRIDGE SAE 12




Technical data

Max flow	50,00 l/min
Max working pressure	250,00 bar
Leakage with oil ISO46	150,00 cc/min
Seal material	NBR and PTFE
Valve installation torque	50,00 Nm
Coil nut torque	5,00 Nm
Weight	0,70 Kg
Surface treatment	Zinc plating
Cavity code	C340000
Body family code	171412
Coil family codes	09800
Valve hex size	32,00 mm


Cross section

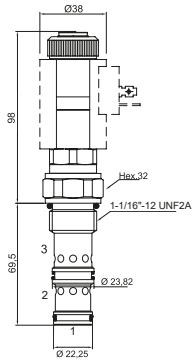

Cavity details

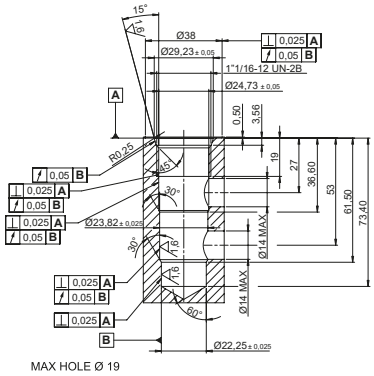

Curves

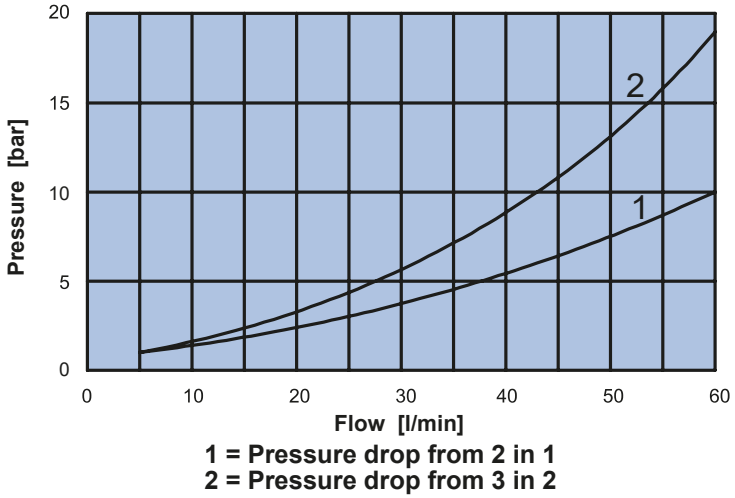



1 = Pressure drop from 2 in 1
2 = Pressure drop from 3 in 2

Coil 09800 to be ordered separately

Proportional coil 09800 applied to provide the operating needed power (ED 50%).
For ED 100% contact NEM customer care service.

Ordering code

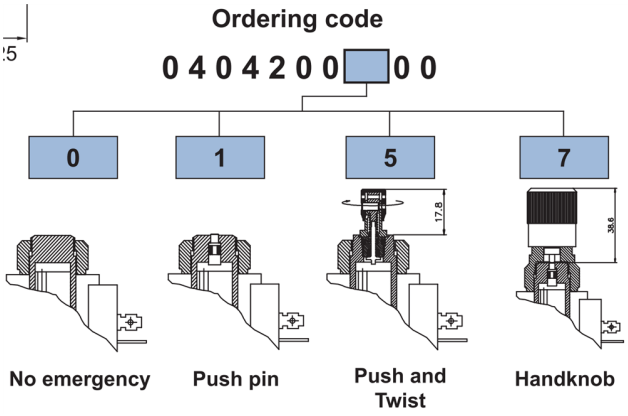

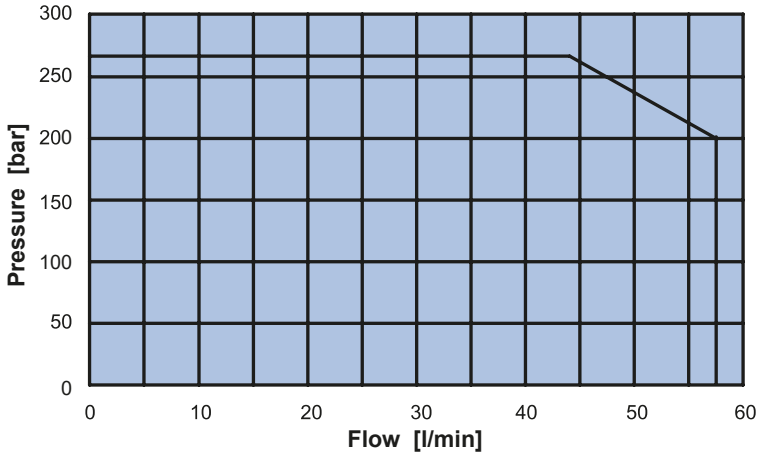

Application limits from 2 in 1 and 2 in 3