
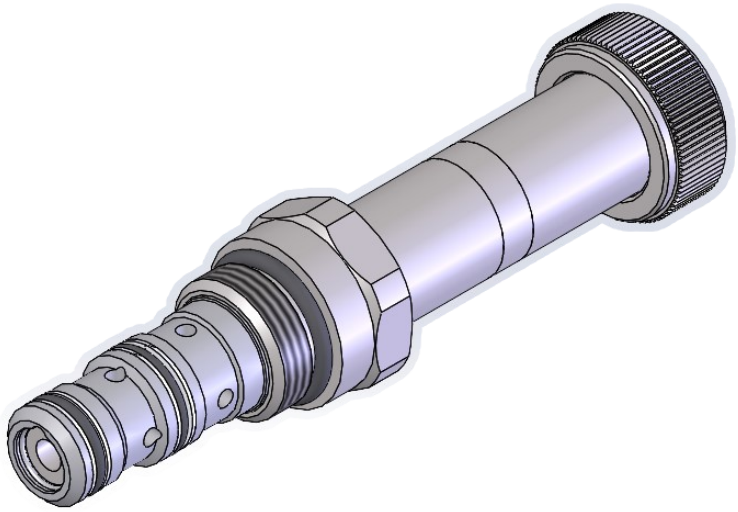


Solenoid valves

04232
3 Way 2 Position Electric Poppet Valve, Direct Acting


CARTRIDGE SAE 10




Technical data

Max flow	30,00 l/min
Max working pressure	350,00 bar
Leakage with oil ISO46	0,25 cc/min
Seal material	NBR and PTFE
Valve installation torque	40,00 Nm
Coil nut torque	5,00 Nm
Weight	0,56 Kg
Surface treatment	Zinc plating
Cavity code	C330000
Body family code	171312
Coil family codes	09800
Valve hex size	27,00 mm


Cross section

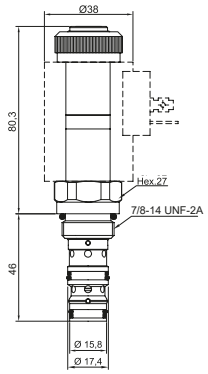

Cavity details

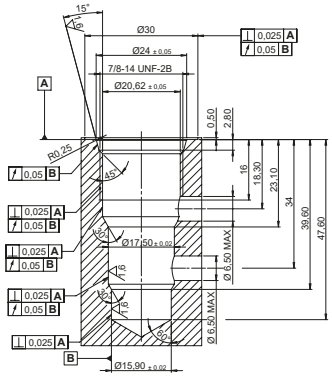

Curves

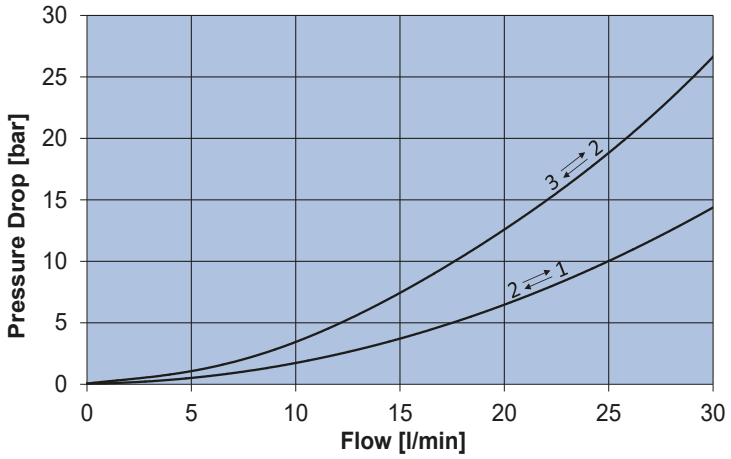

Coil 09800 to be ordered separately

Proportional coil 09800 applied to provide the operating needed power (ED 50%).
For ED 100% contact NEM customer care service.

Ordering code

