
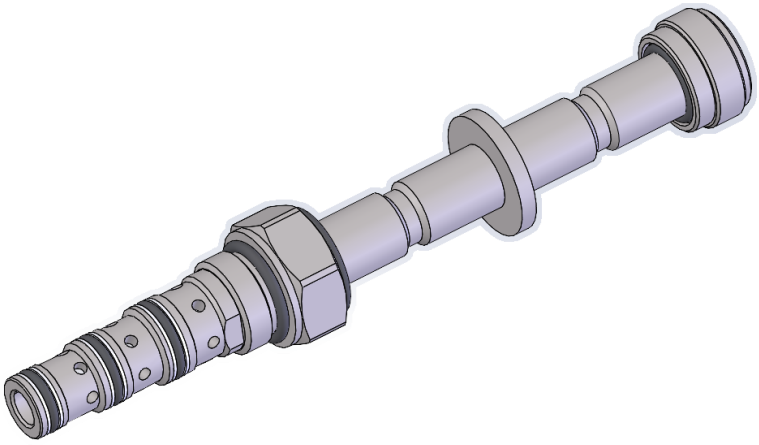



Solenoid valves

# 04621
# 4 Way 3 Position Electric Spool Valve, Direct Acting


CARTRIDGE SAE 08





## Cross section

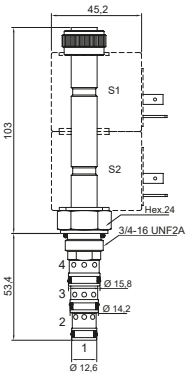


## Cavity details

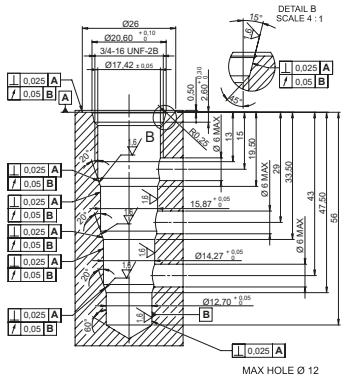


## Curves

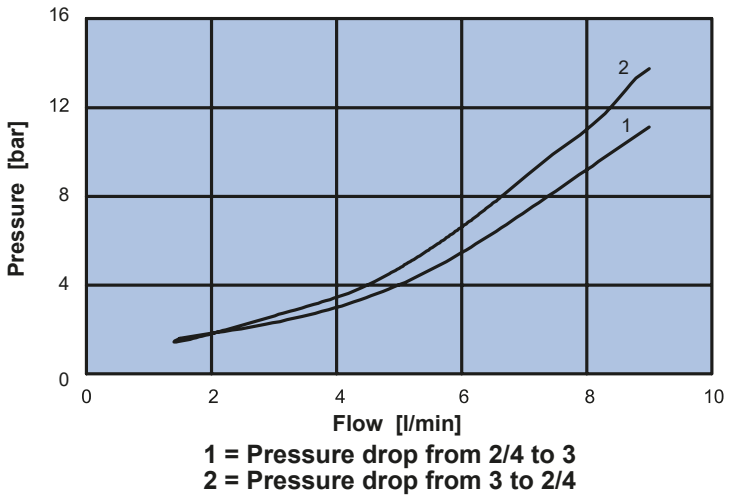



1 = Pressure drop from 2/4 to 3
2 = Pressure drop from 3 to 2/4

## Technical data

| | |
|---|---|
| Max flow | 10,00 l/min |
| Max working pressure | 210,00 bar |
| Working pressure port in 2:3:4 | 210,00 bar |
| Working pressure in port 1 | 20,00 bar |
| Leakage with oil ISO46 | 60,00 cc/min |
| Seal material | NBR and PTFE |
| Valve installation torque | 40,00 Nm |
| Coil nut torque | 5,00 Nm |
| Weight | 0,70 Kg |
| Surface treatment | Zinc plating |
| Cavity code | C420000 |
| Body family code | 171222 |
| Coil family codes | 09400 |
| Valve hex size | 24,00 mm |

Coil 09400 to be ordered separately

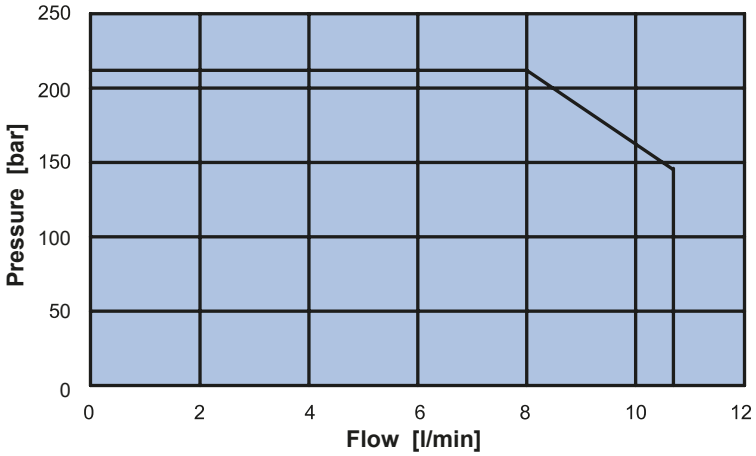


**Application limits from 3 in 2/4**

**Ordering code**

**0 4 6 2 1 0 0 [ ] 0 0**

**0** — **No emergency**

**4** — **Push Button**

