
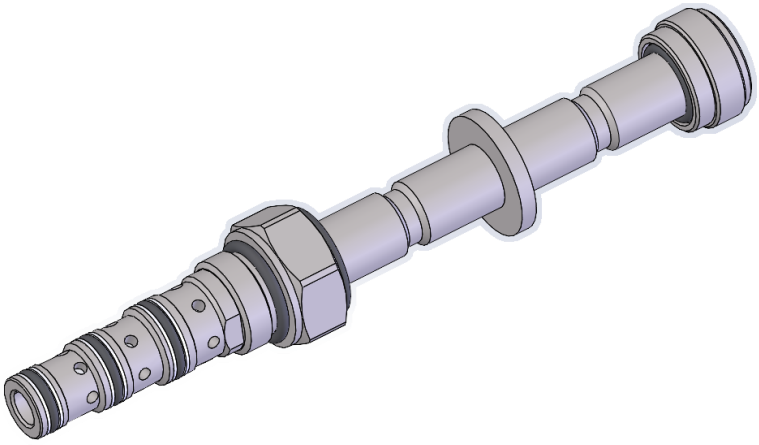



Solenoid valves

04622
4 Way 3 Position Electric Spool Valve, Direct Acting


CARTRIDGE SAE 08



Cross section

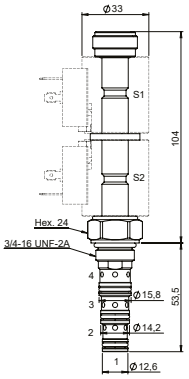

Cavity details

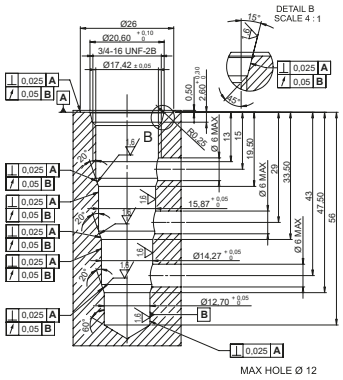


Technical data


Max flow	10,00 l/min
Max working pressure	210,00 bar
Working pressure port in 2:3:4	210,00 bar
Working pressure in port 1	20,00 bar
Leakage with oil ISO46	60,00 cc/min
Seal material	NBR and PTFE
Valve installation torque	30,00 Nm
Coil nut torque	5,00 Nm
Weight	0,70 Kg
Surface treatment	Zinc plating
Cavity code	C420000
Body family code	171222
Coil family codes	09400
Valve hex size	24,00 mm

Coil 09400 to be ordered separately

Curves

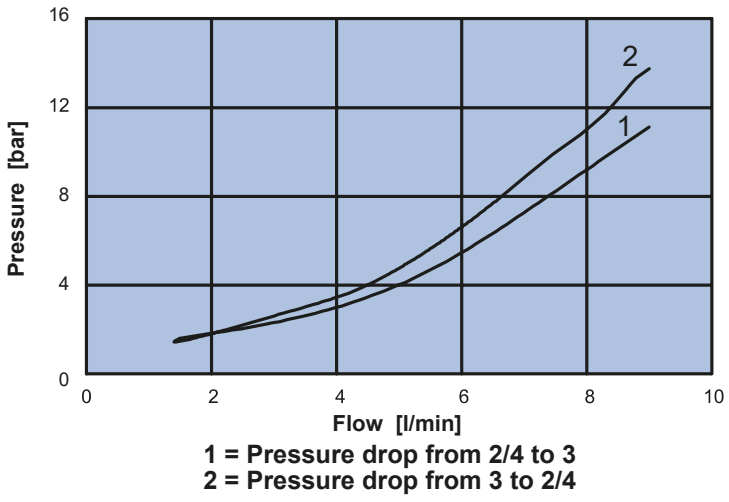


1 = Pressure drop from 2/4 to 3
2 = Pressure drop from 3 to 2/4

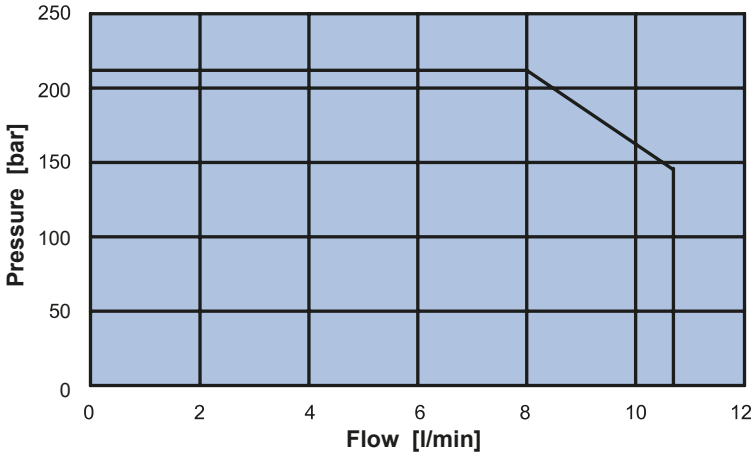

Application limits from 3 in 2/4

Ordering code

0 4 6 2 2 0 0 [ ] 0 0

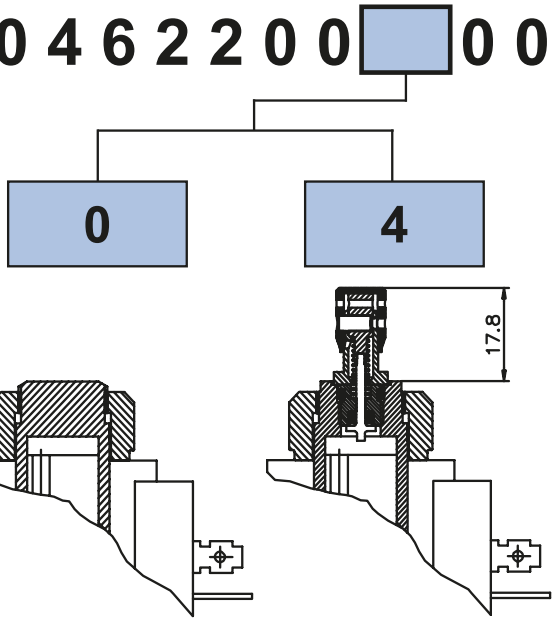

No emergency

Push Button