
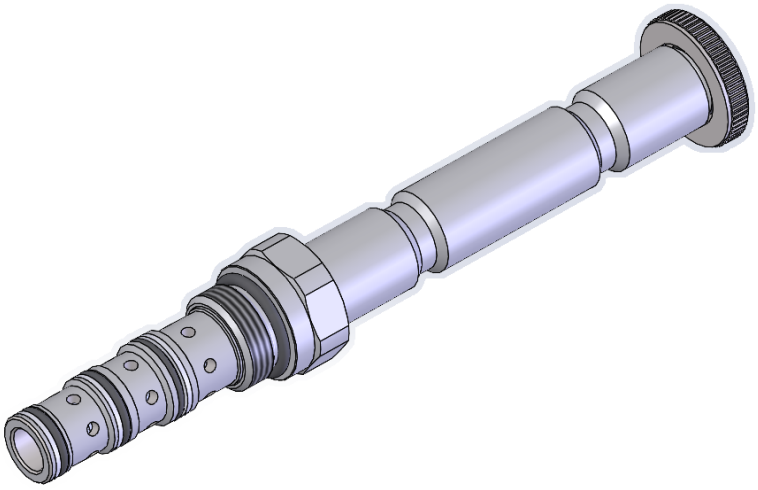



Solenoid valves

# 04632
# 4 Way 3 Position Electric Spool Valve, Direct Acting


CARTRIDGE SAE 10




## Cross section

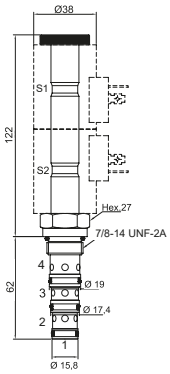



## Cavity details

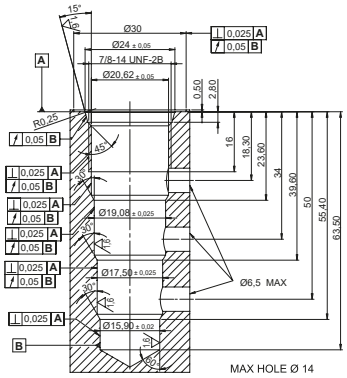


## Technical data

| | |
|---|---|
| Max flow | 25,00 l/min |
| Max working pressure | 250,00 bar |
| Working pressure port in 2:3:4 | 250,00 bar |
| Working pressure in port 1 | 20,00 bar |
| Leakage with oil ISO46 | 100,00 cc/min |
| Seal material | NBR and PTFE |
| Valve installation torque | 40,00 Nm |
| Coil nut torque | 5,00 Nm |
| Weight | 0,90 Kg |
| Surface treatment | Zinc plating |
| Cavity code | C430000 |
| Body family code | 171322 |
| Coil family codes | 09801 |
| Valve hex size | 27,00 mm |


## Curves

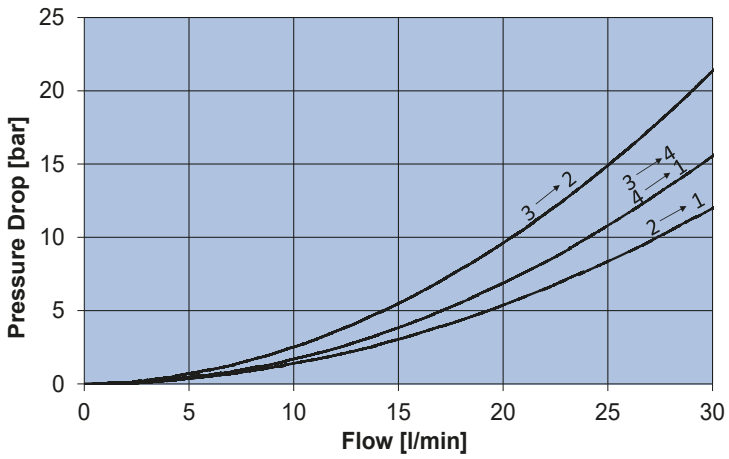



Coil 09801 to be ordered separately

## Ordering code

0 4 6 3 2 0 0 ☐ 0 0

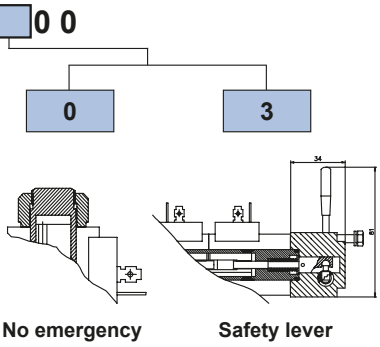

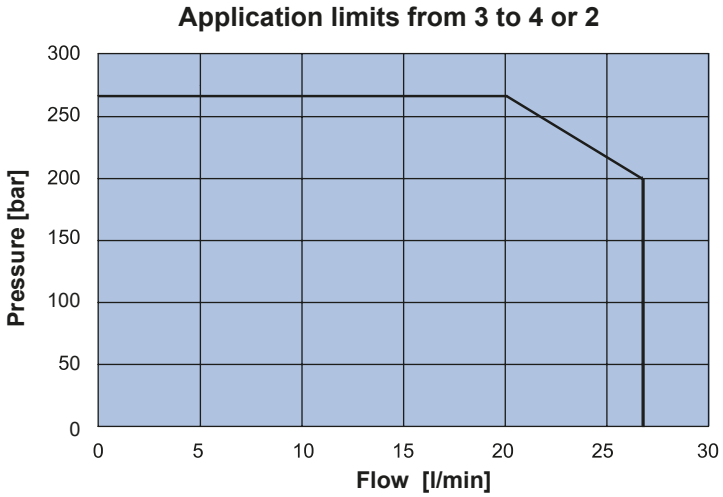
Application limits from 3 to 4 or 2
Pressure [bar]
300
250
200
150
100
50
0
0
5
10
15
20
25
30
Flow [l/min]