
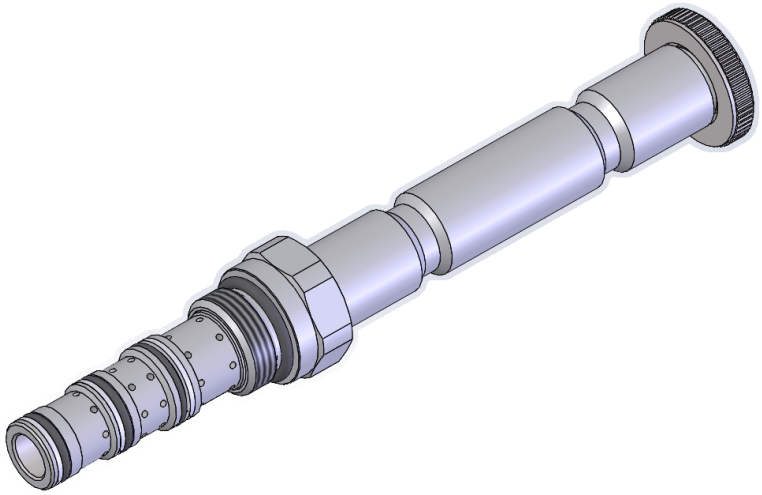



Solenoid valves

04633
4 Way 3 Position Electric Spool Valve, Direct Acting


CARTRIDGE SAE 10



Cross section

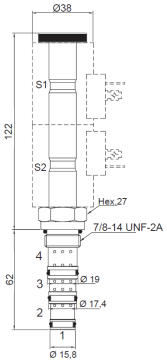


Cavity details

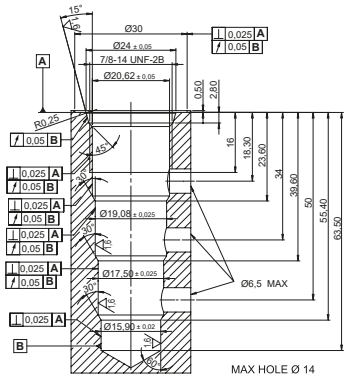

Technical data

Max flow	25,00 l/min
Max working pressure	250,00 bar
Working pressure port in 2:3:4	250,00 bar
Working pressure in port 1	20,00 bar
Leakage with oil ISO46	100,00 cc/min
Seal material	NBR and PTFE
Valve installation torque	40,00 Nm
Coil nut torque	5,00 Nm
Weight	0,90 Kg
Surface treatment	Zinc plating
Cavity code	C430000
Body family code	171322
Coil family codes	09801
Valve hex size	27,00 mm

Curves

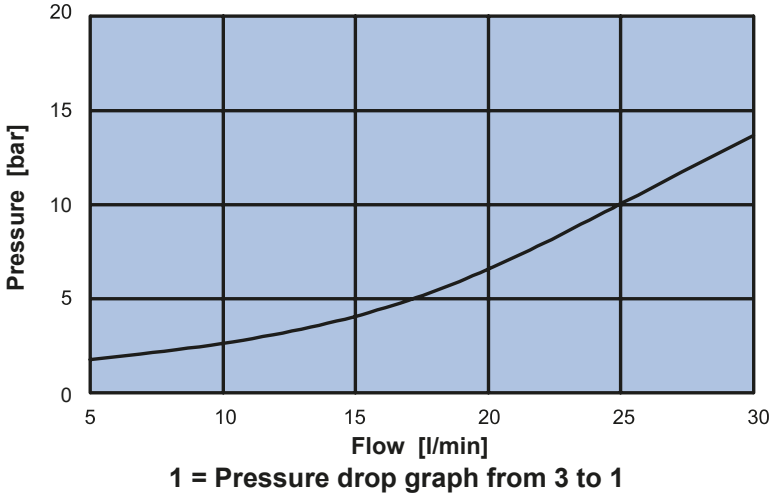


1 = Pressure drop graph from 3 to 1

Coil 09801 to be ordered separately


Ordering code

0 4 6 3 3 0 0 ☐ 0 0

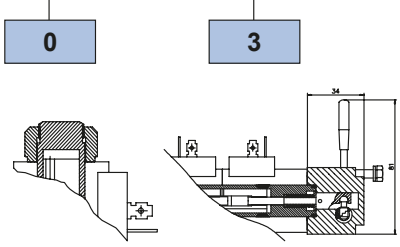

No emergency

Safety lever

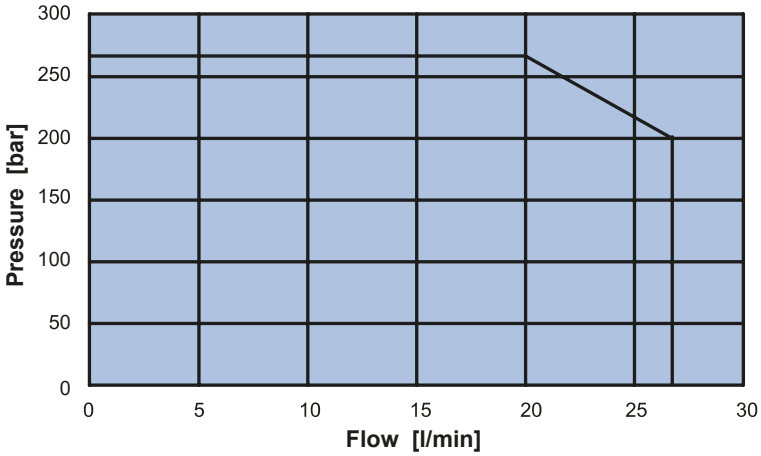

Application limits from 3 to 4 or 2