
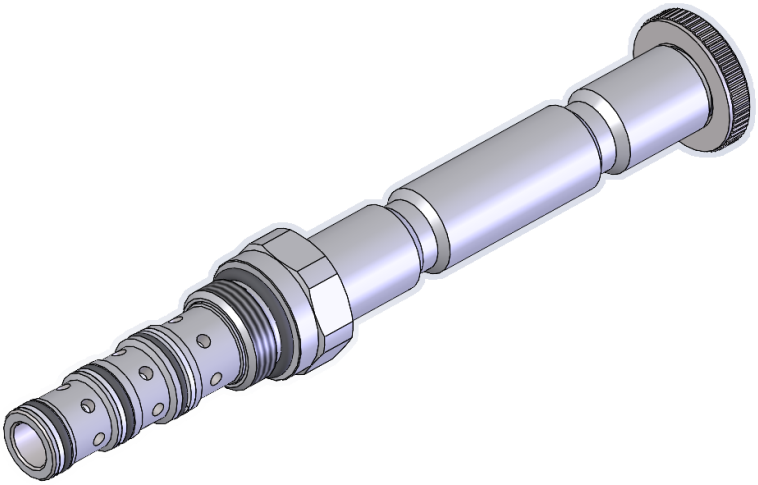



Solenoid valves

04634
4 Way 3 Position Electric Spool Valve, Direct Acting


CARTRIDGE SAE 10




Cross section

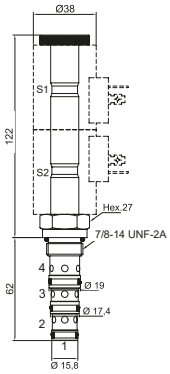

Cavity details

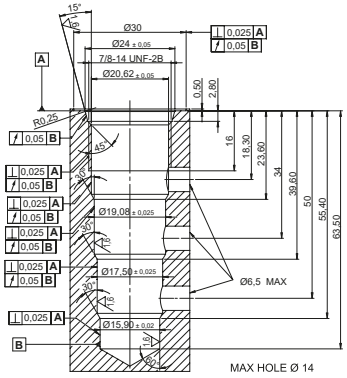

Curves

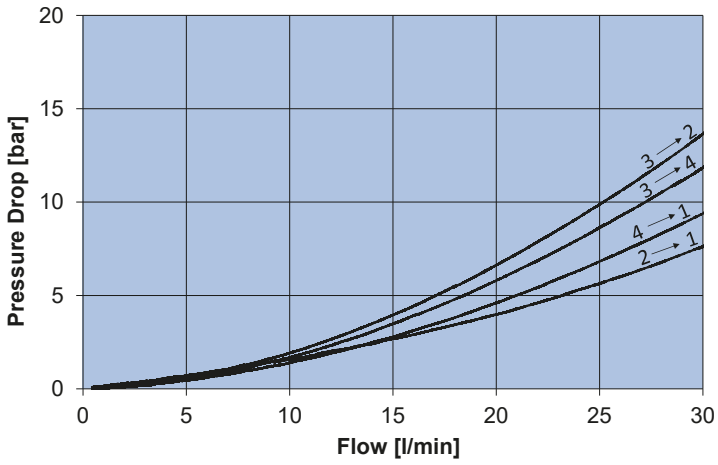



Technical data

Max flow	25,00 l/min
Max working pressure	250,00 bar
Working pressure port in 2:3:4	250,00 bar
Working pressure in port 1	20,00 bar
Leakage with oil ISO46	100,00 cc/min
Seal material	NBR and PTFE
Valve installation torque	40,00 Nm
Coil nut torque	5,00 Nm
Weight	0,90 Kg
Surface treatment	Zinc plating
Cavity code	C430000
Body family code	171322
Coil family codes	09801
Valve hex size	27,00 mm


Coil 09801 to be ordered separately

Ordering code

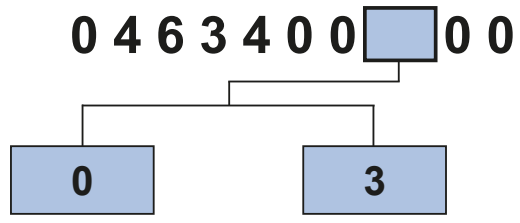




No emergency

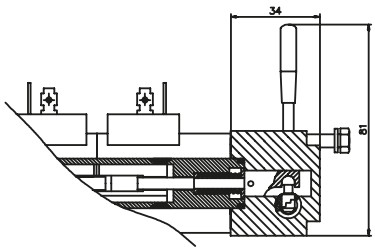

Safety lever

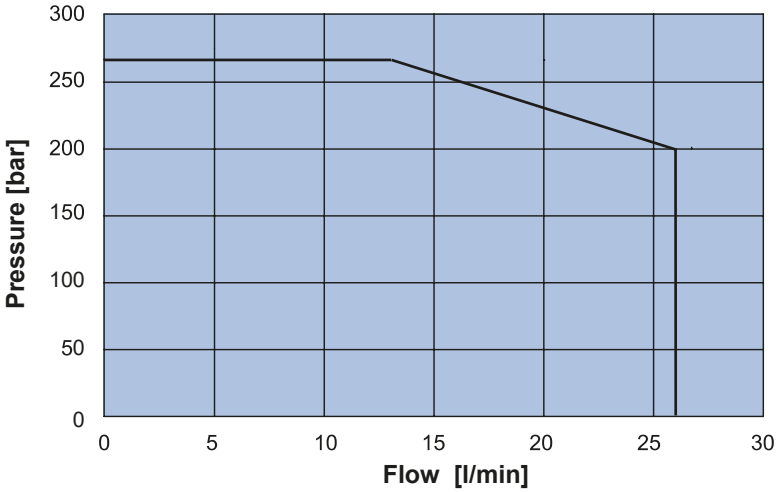
300
250
200
150
100
50
0
Pressure [bar]
0
5
10
15
20
25
30
Flow [l/min]