
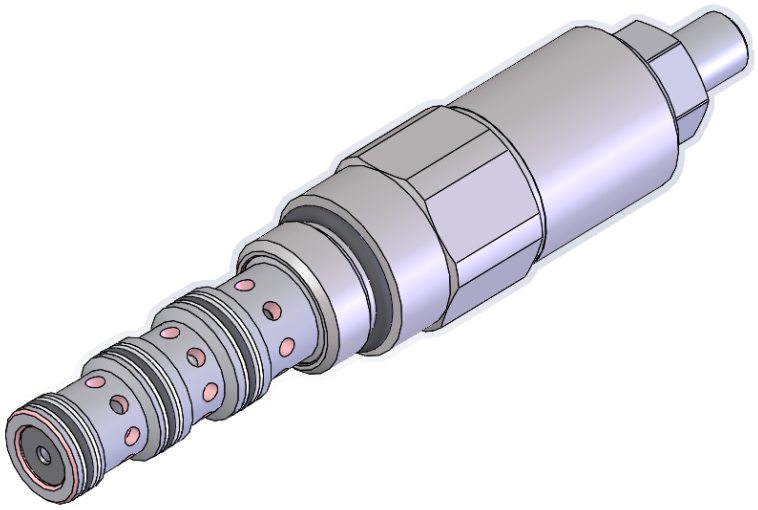


Mechanical

048341
Adjustable Setting Directional Valve


CARTRIDGE SAE 10/4




Technical data

Max flow	50,00 l/min
Max working pressure	350,00 bar
Seal material	NBR and PTFE
Valve installation torque	50,00 Nm
Weight	0,35 Kg
Surface treatment	Zinc plating
Cavity code	C430000
Body family code	171322
Valve hex size	27,00 mm


Cross section

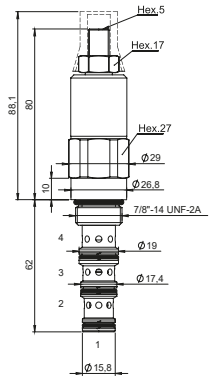

Cavity details

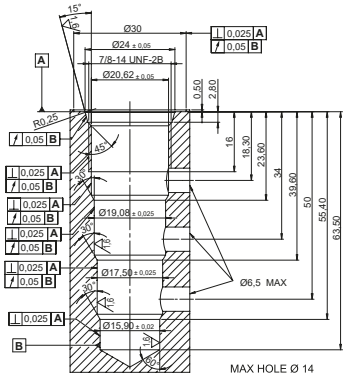

Curves

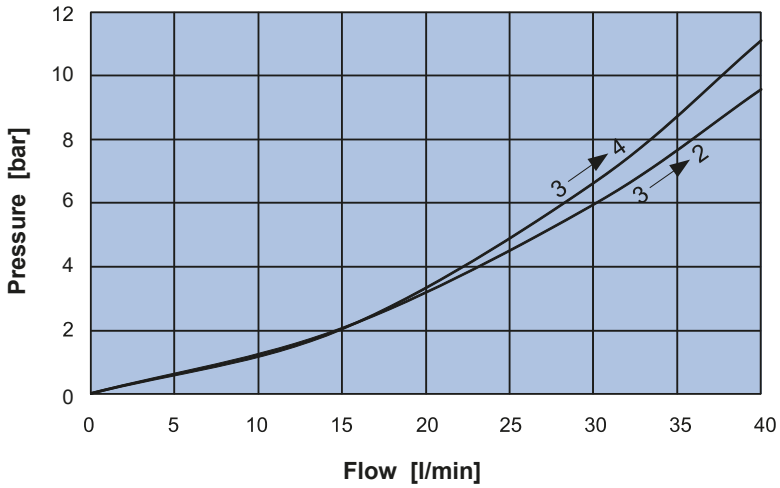

Ordering code

0 4 8 3 4 1 ☐ ☐ 0 0

SPRINGS	1	2	3
Setting	2 - 10 bar	5 - 20 bar	10 - 60 bar
Standard setting	5	8	20
Bar/turn	1,9	3	10,3

0	1	2
Screw	Tamper proof	Handknob

Adjustments