
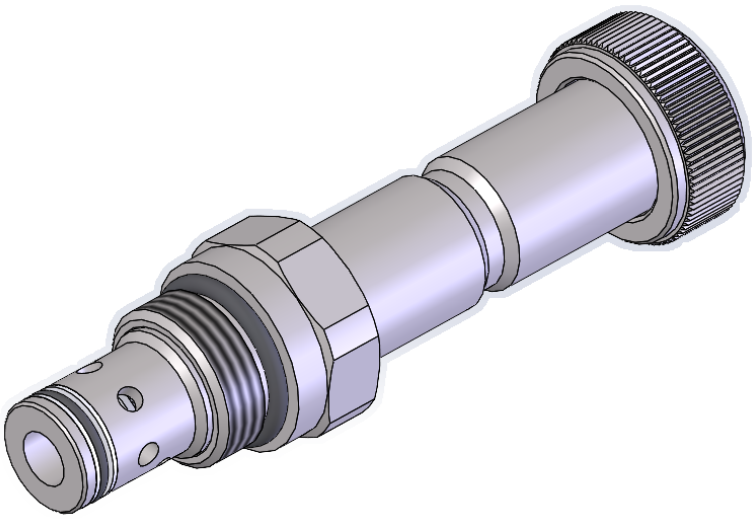


Solenoid valves

05131
2 Way 2 Position Electric Poppet Valve, Direct Acting NC


CARTRIDGE SAE 10




Technical data

Max flow	60,00 l/min
Max working pressure	350,00 bar
Leakage with oil ISO46	0,25 cc/min
Seal material	NBR and PTFE
Valve installation torque	40,00 Nm
Coil nut torque	5,00 Nm
Weight	0,56 Kg
Surface treatment	Zinc plating
Cavity code	C230000
Body family code	171302
Coil family codes	09801
Valve hex size	27,00 mm


Cross section

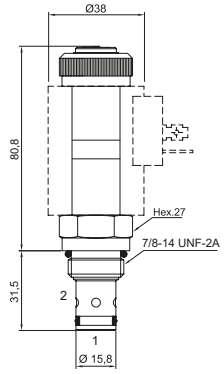

Cavity details

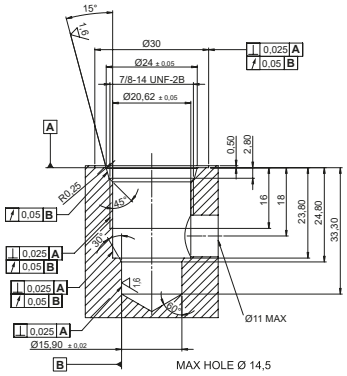

Curves

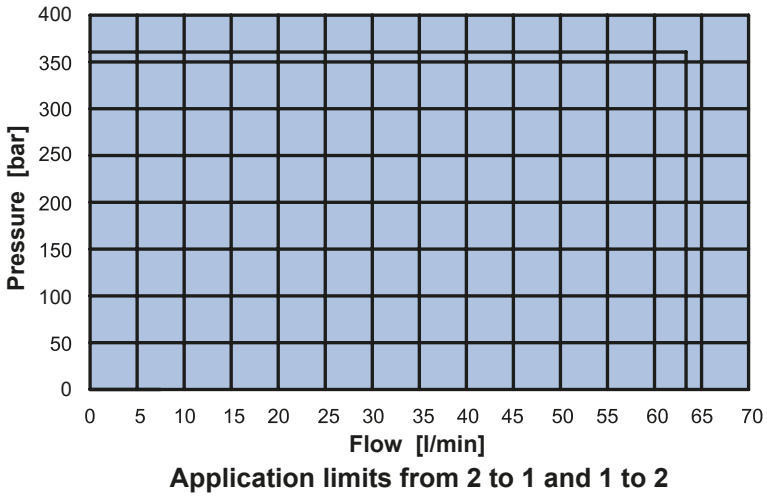


Application limits from 2 to 1 and 1 to 2


Coil 09801 to be ordered separately

Ordering code

0 5 1 3 1 0 0 [ ] 0 0

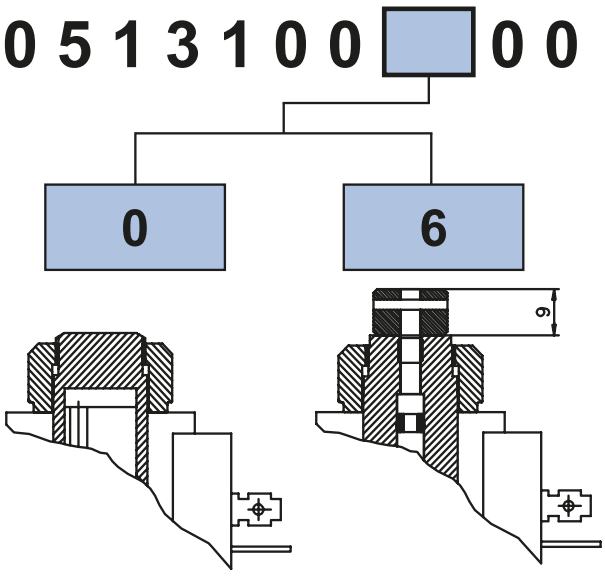

No emergency **Unscrew type**

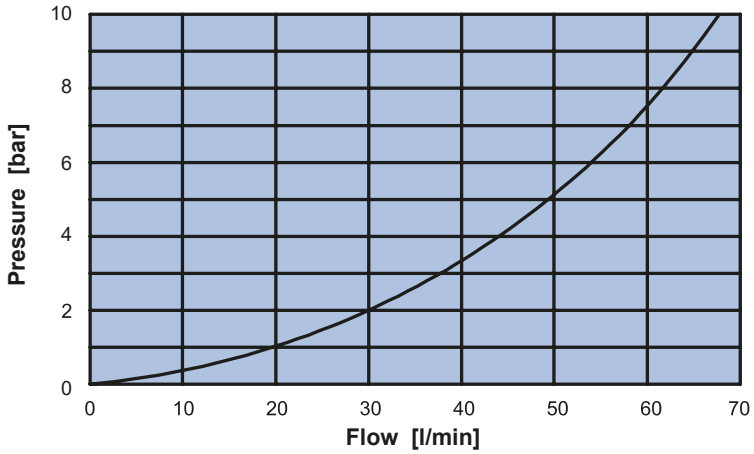

Pressure drop from 2 to 1 and from 1 to 2