
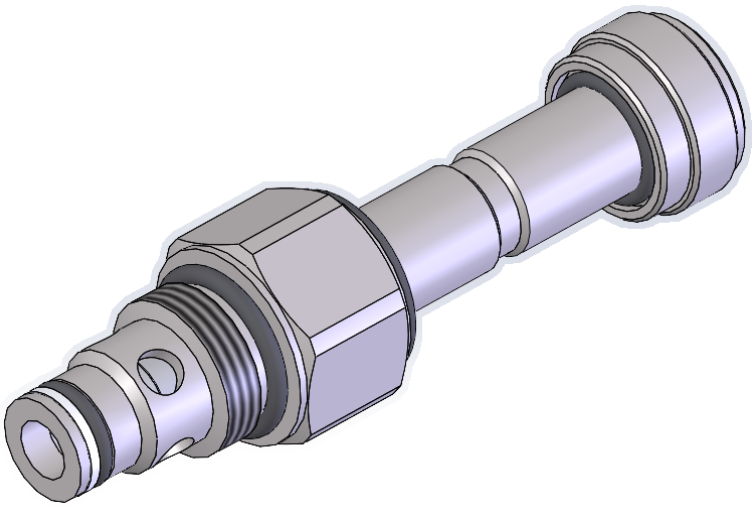



Solenoid valves

05520
2 Way 2 Position Electric Poppet Valve, Pilot Operated NO

CARTRIDGE SAE 08




Scheme 0




Scheme 1

Cross section

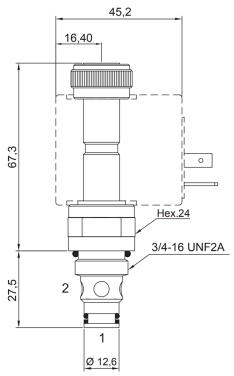


Cavity details

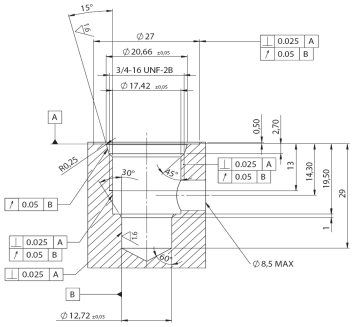

Technical data

Max flow	40,00 l/min
Max working pressure	350,00 bar
Leakage with oil ISO46	0,25 cc/min
Seal material	NBR and PTFE
Valve installation torque	30,00 Nm
Coil nut torque	5,00 Nm
Weight	0,32 Kg
Surface treatment	Zinc plating
Cavity code	C220000
Body family code	171202
Coil family codes	09400
Valve hex size	24,00 mm


Curves

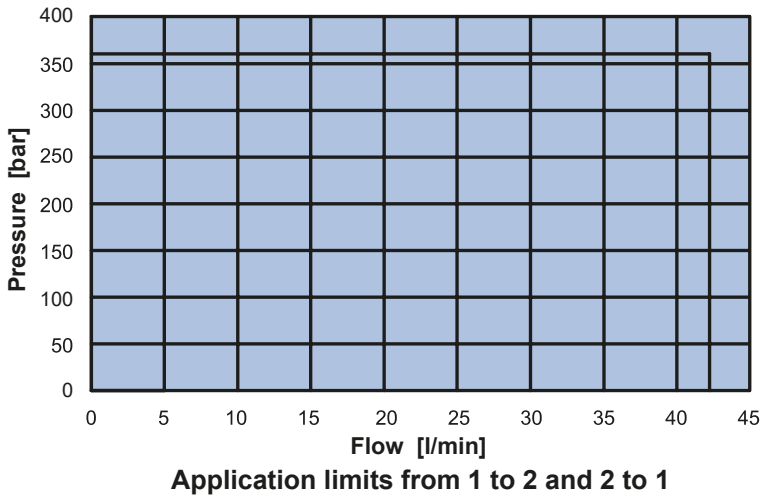


Application limits from 1 to 2 and 2 to 1

Coil 09400 to be ordered separately

Ordering code

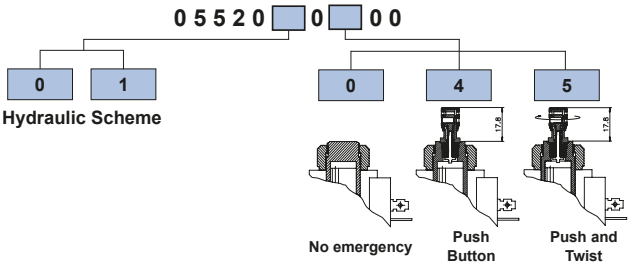

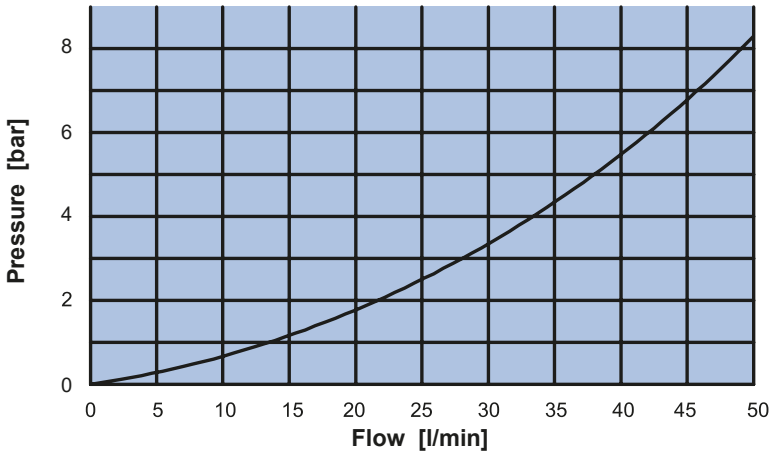

Pressure drop with energized coil