
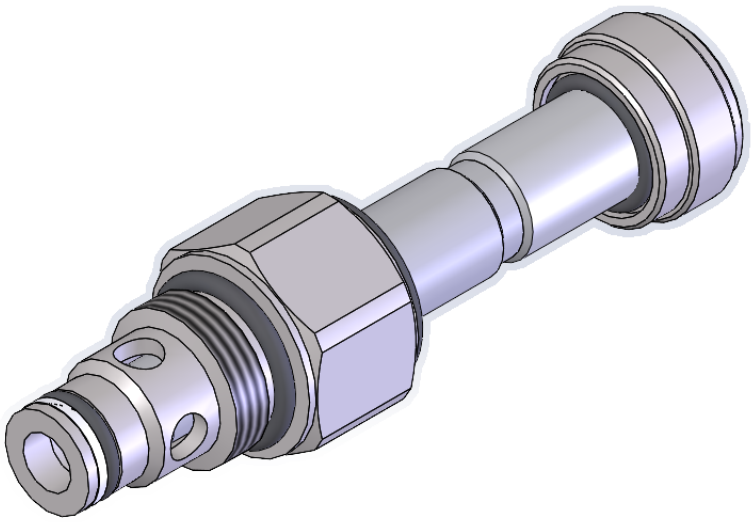


Solenoid valves

05620
2 Way 2 Position Electric Poppet Valve, Pilot Operated NO


CARTRIDGE SAE 08




Technical data

Max flow	40,00 l/min
Max working pressure	350,00 bar
Leakage with oil ISO46	0,25 cc/min
Seal material	NBR and PTFE
Valve installation torque	30,00 Nm
Coil nut torque	5,00 Nm
Weight	0,32 Kg
Surface treatment	Zinc plating
Cavity code	C220000
Body family code	171202
Coil family codes	09400
Valve hex size	24,00 mm


Cross section

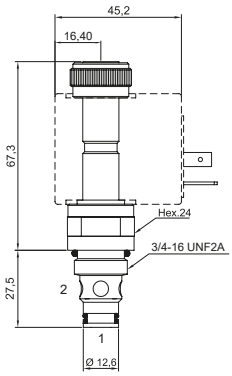

Cavity details

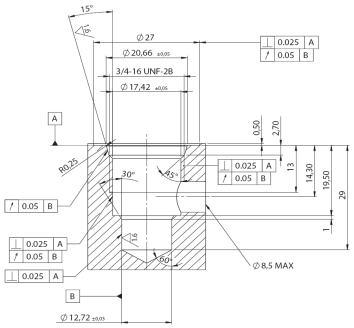

Curves



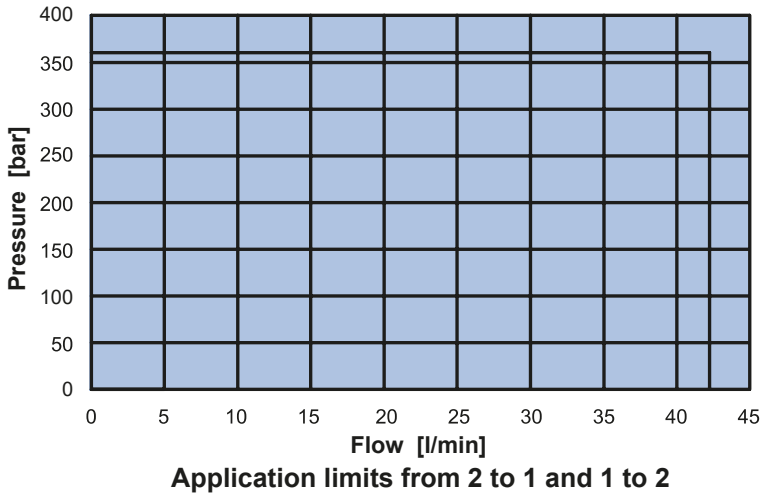



Application limits from 2 to 1 and 1 to 2

Coil 09400 to be ordered separately

Ordering code

0 5 6 2 0 0 0 ☐ 0 0

0	4	5
		
No emergency	Push Button	Push and Twist

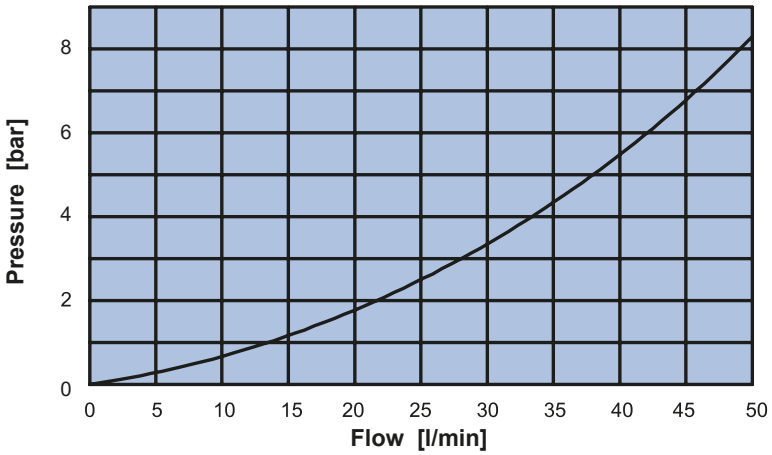

Pressure drop from 2 to 1 and from 1 to 2