
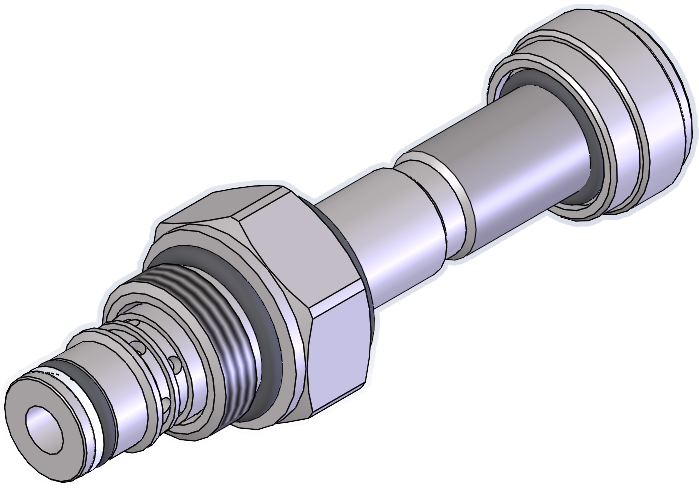


Solenoid valves

05626
2 Way 2 Position Electric Poppet Valve, Pilot Operated NC


CARTRIDGE SAE 08




Technical data

Max flow	30,00 l/min
Max working pressure	300,00 bar
Leakage with oil ISO46	0,25 cc/min
Seal material	NBR and PTFE
Valve installation torque	30,00 Nm
Coil nut torque	5,00 Nm
Weight	0,32 Kg
Surface treatment	Zinc plating
Cavity code	C220000
Body family code	171202
Coil family codes	09300|09400
Valve hex size	24,00 mm


Cross section

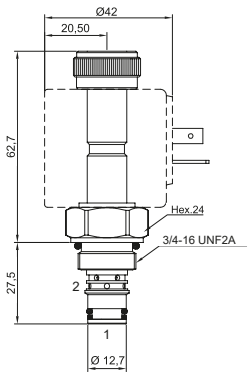

Cavity details

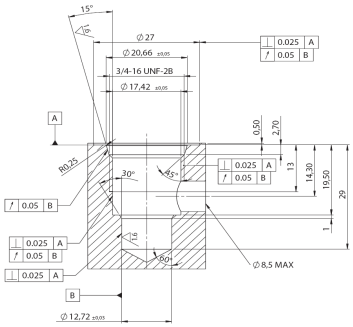


Curves

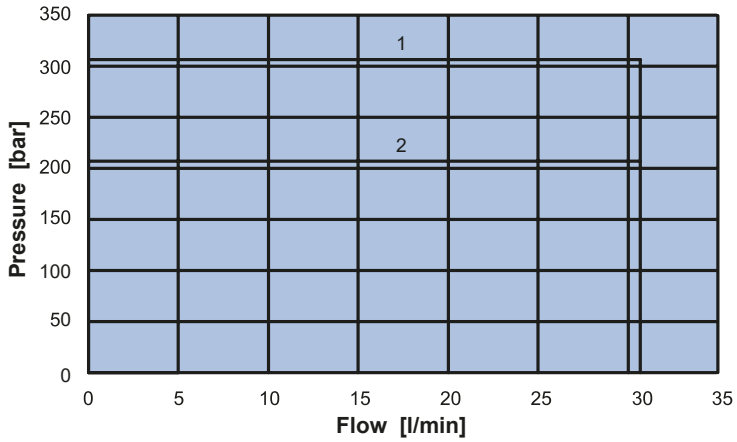


1 = Application limits from 2 to 1 without filter
2 = Application limits with filter

Coil 09300 and 09400 to be ordered separately

Ordering code

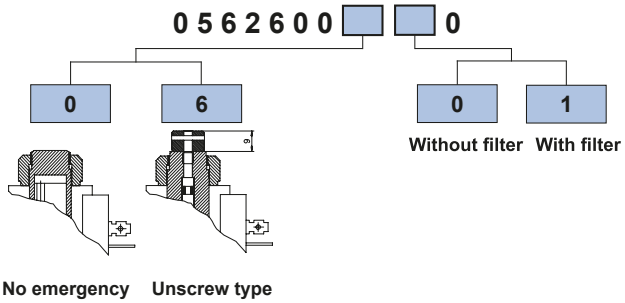

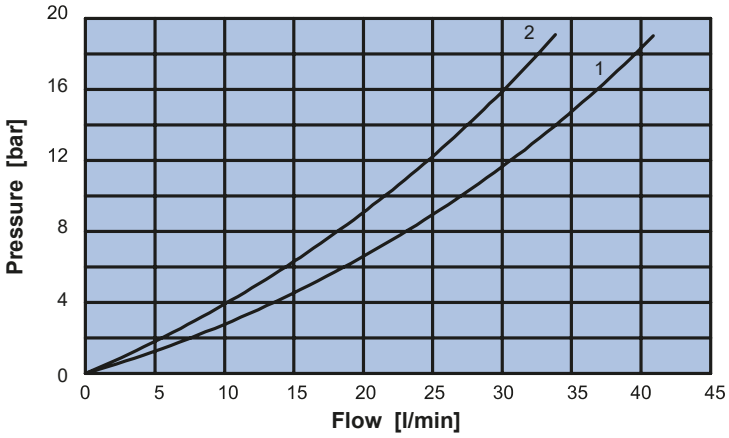

1 = Pressure drop from 2 to 1 without filter
2 = Pressure drop from 2 to 1 with filter