
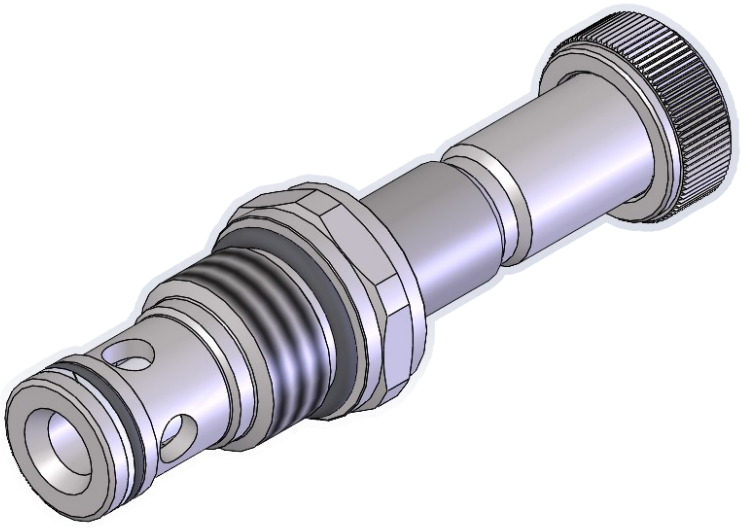


Solenoid valves

# 05641
# 2 Way 2 Position Electric Poppet Valve, Pilot Operated NC


CARTRIDGE SAE 12





## Technical data

| | |
|---|---|
| Max flow | 150,00 l/min |
| Max working pressure | 350,00 bar |
| Leakage with oil ISO46 | 0,25 cc/min |
| Seal material | NBR and PTFE |
| Valve installation torque | 50,00 Nm |
| Coil nut torque | 5,00 Nm |
| Weight | 0,58 Kg |
| Surface treatment | Zinc plating |
| Cavity code | C240000 |
| Body family code | 171402 |
| Coil family codes | 09801 |
| Valve hex size | 32,00 mm |


## Cross section

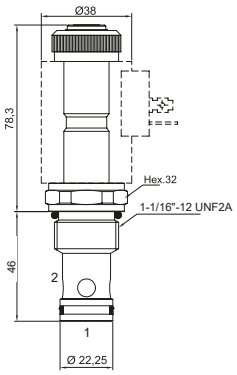


## Cavity details

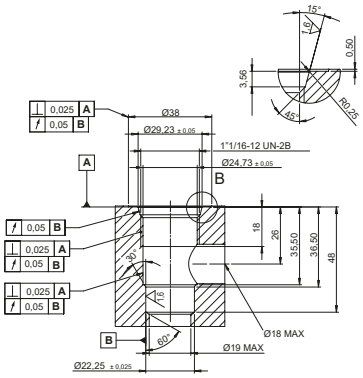


## Curves

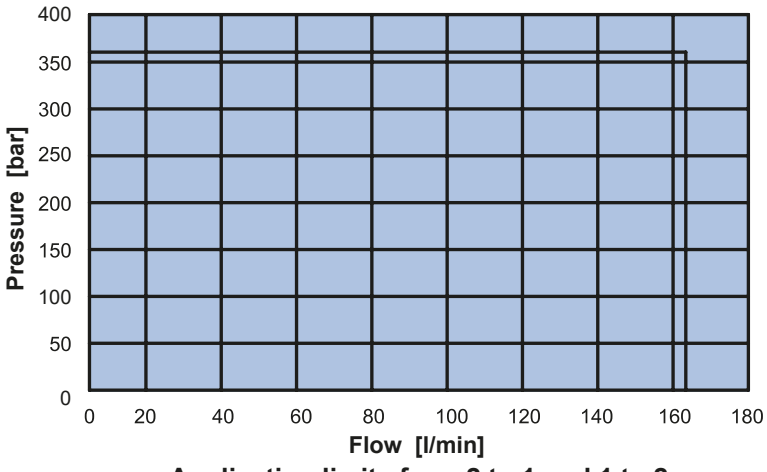



Application limits from 2 to 1 and 1 to 2


Coil 09801 to be ordered separately

## Ordering code

**0 5 6 4 1 0 0 [ ] 0 0**

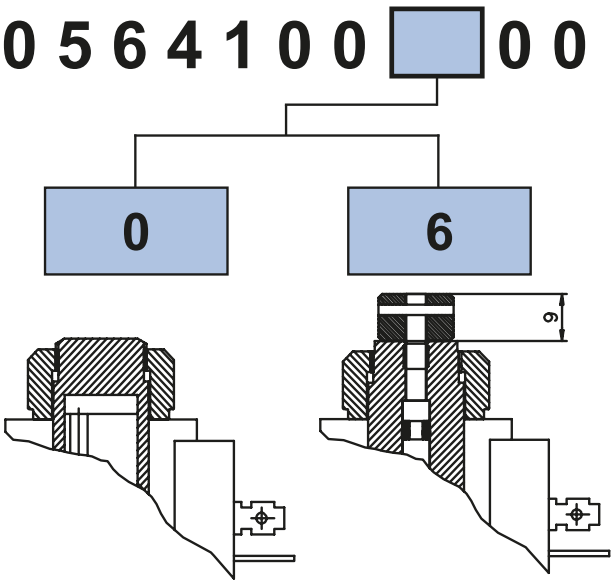


**No emergency** **Unscrew type**

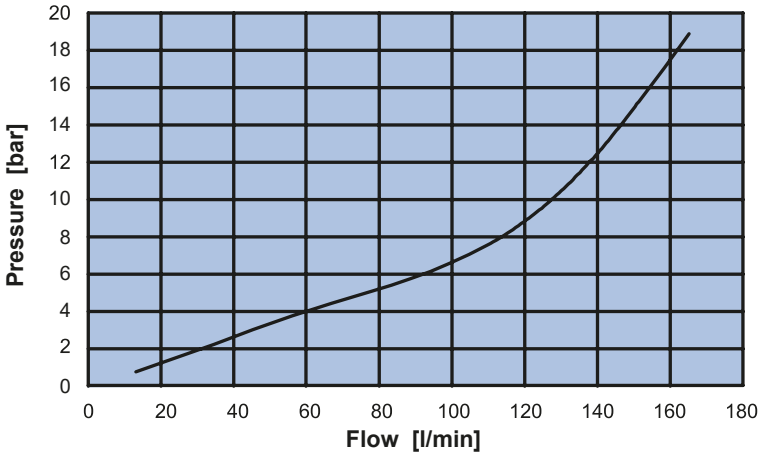


**Pressure drop from 2 to 1 and from 1 to 2**