
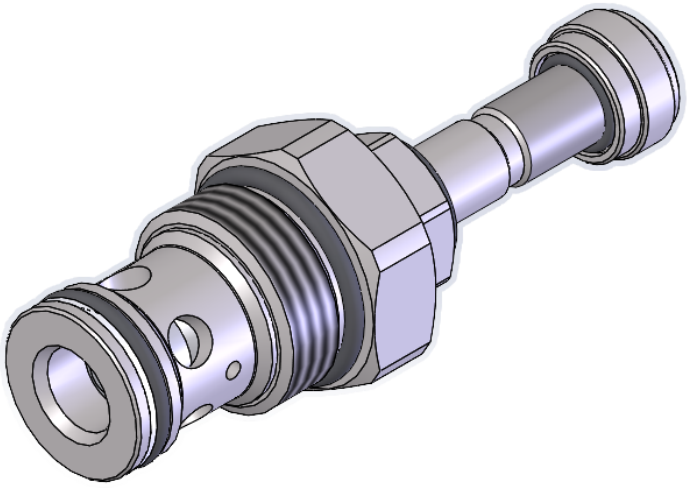


Solenoid valves

05651
2 Way 2 Position Electric Poppet Valve, Pilot Operated NC


CARTRIDGE SAE 16




Technical data

Max flow	200,00 l/min
Max working pressure	350,00 bar
Leakage with oil ISO46	0,25 cc/min
Seal material	NBR and PTFE
Valve installation torque	65,00 Nm
Coil nut torque	5,00 Nm
Weight	0,58 Kg
Surface treatment	Zinc plating
Cavity code	C250000
Body family code	171502
Coil family codes	09400
Valve hex size	38,00 mm


Cross section

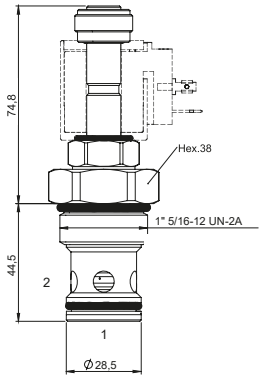

Cavity details

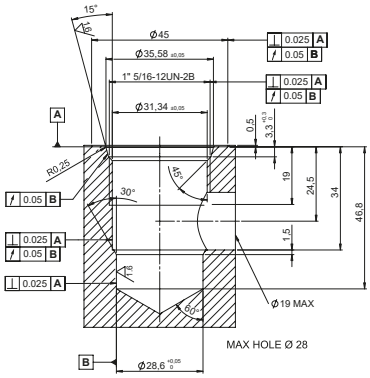


Curves

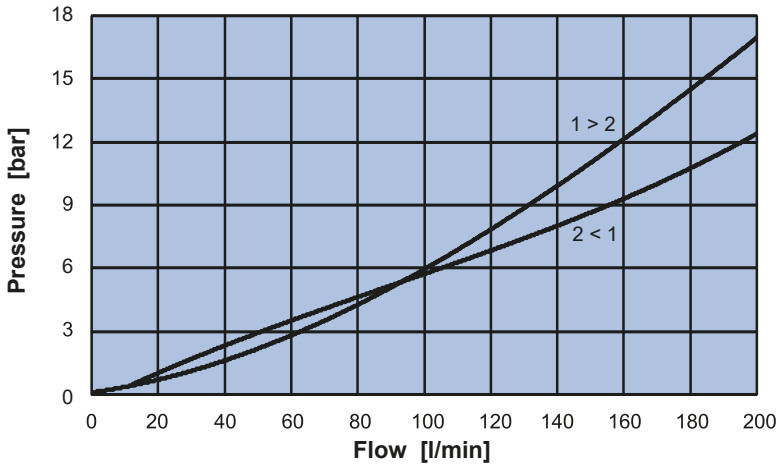

Coil 09400 to be ordered separately

Ordering code

0 5 6 5 1 0 0 [ ] 0 0

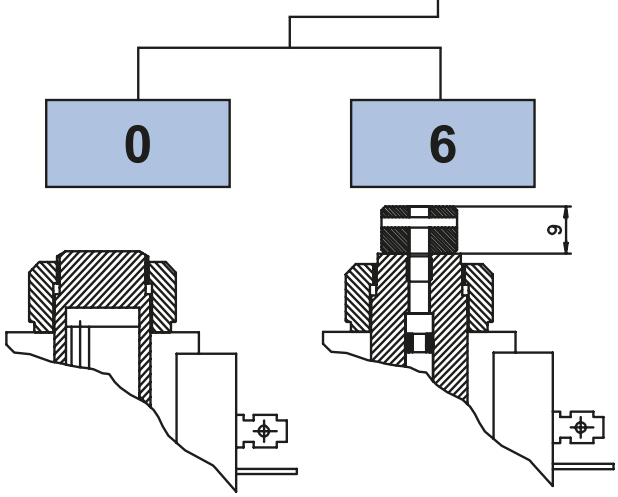

No emergency **Unscrew type**