
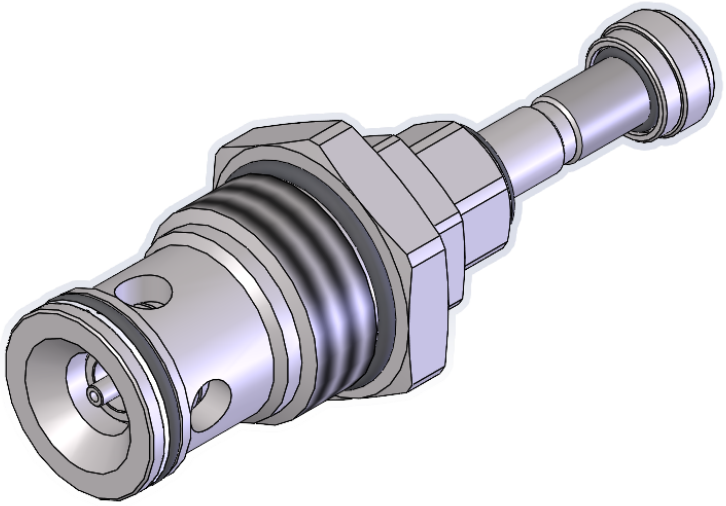


Solenoid valves

05660
2 Way 2 Position Electric Poppet Valve, Pilot Operated NO


CARTRIDGE SAE 20




Technical data

Max flow	300,00 l/min
Max working pressure	350,00 bar
Leakage with oil ISO46	0,25 cc/min
Seal material	NBR and PTFE
Valve installation torque	100,00 Nm
Coil nut torque	5,00 Nm
Weight	0,95 Kg
Surface treatment	Zinc plating
Cavity code	C260001
Coil family codes	09400
Valve hex size	48,00 mm

Cross section

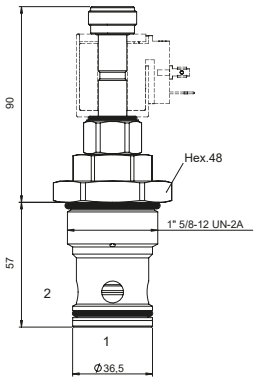


Cavity details

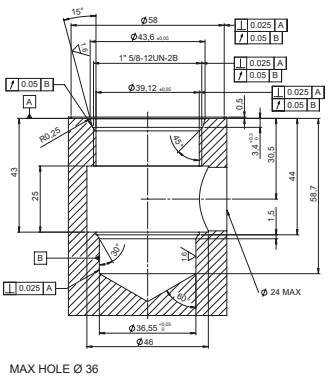

MAX HOLE Ø 36

Curves

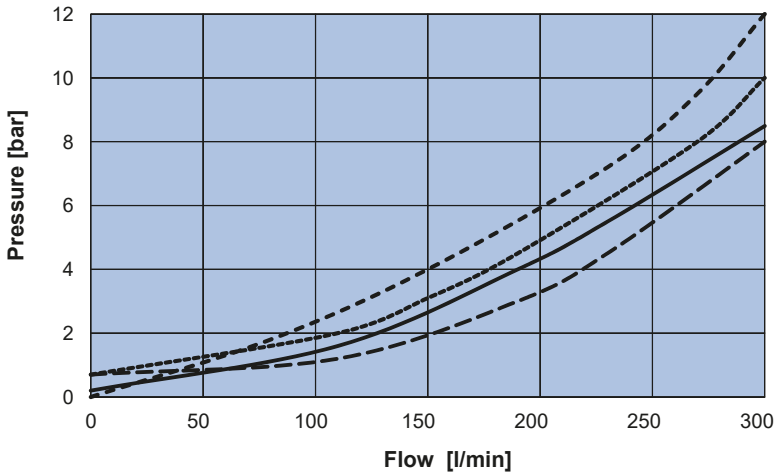

Coil 09400 to be ordered separately

Ordering code

