
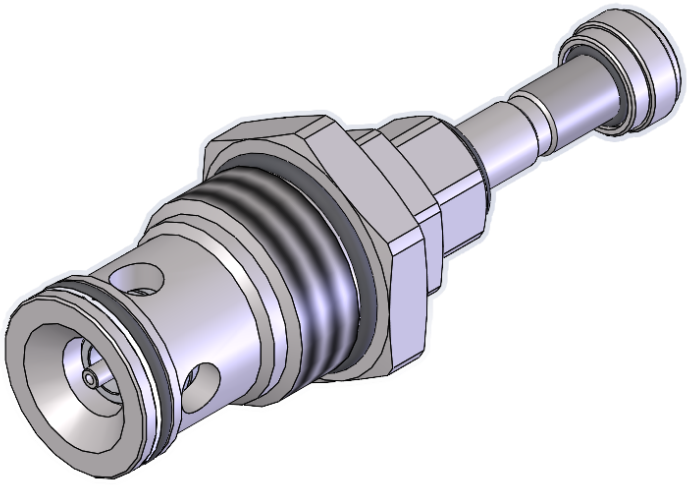


Solenoid valves

# 05661
## 2 Way 2 Position Electric Poppet Valve, Pilot Operated NC


CARTRIDGE SAE 20





### Technical data

| | |
|---|---|
| Max flow | 300,00 l/min |
| Max working pressure | 350,00 bar |
| Leakage with oil ISO46 | 0,25 cc/min |
| Seal material | NBR and PTFE |
| Valve installation torque | 100,00 Nm |
| Coil nut torque | 5,00 Nm |
| Weight | 0,95 Kg |
| Surface treatment | Zinc plating |
| Cavity code | C260001 |
| Coil family codes | 09400 |
| Valve hex size | 48,00 mm |


### Cross section

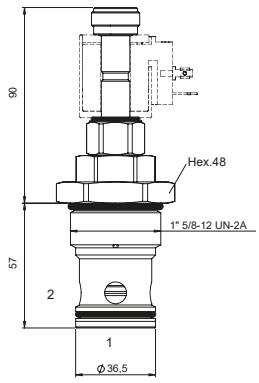


### Cavity details

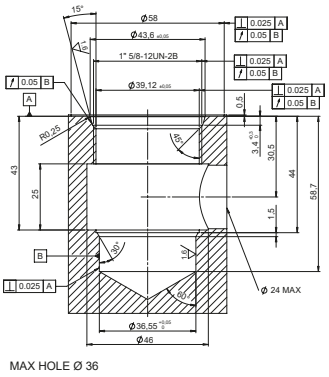



### Curves

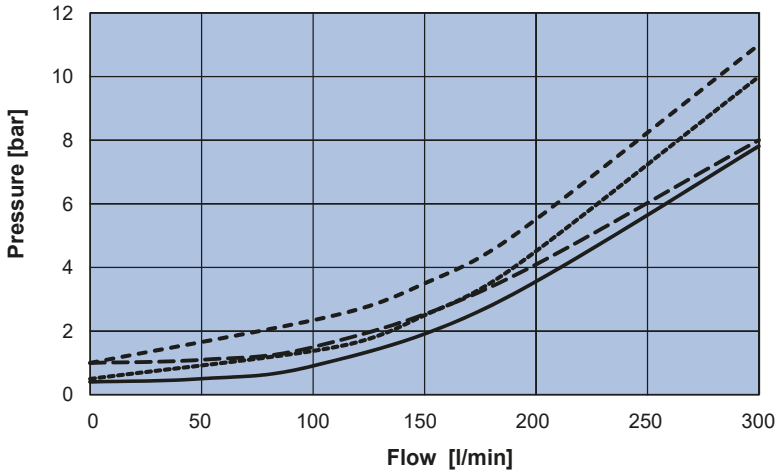


Coil 09400 to be ordered separately

### Ordering code

**0 5 6 6 1 0 0 [ ] 0 0**

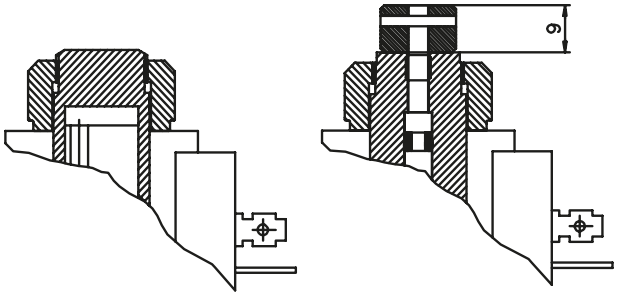


**No emergency** **Unscrew type**