

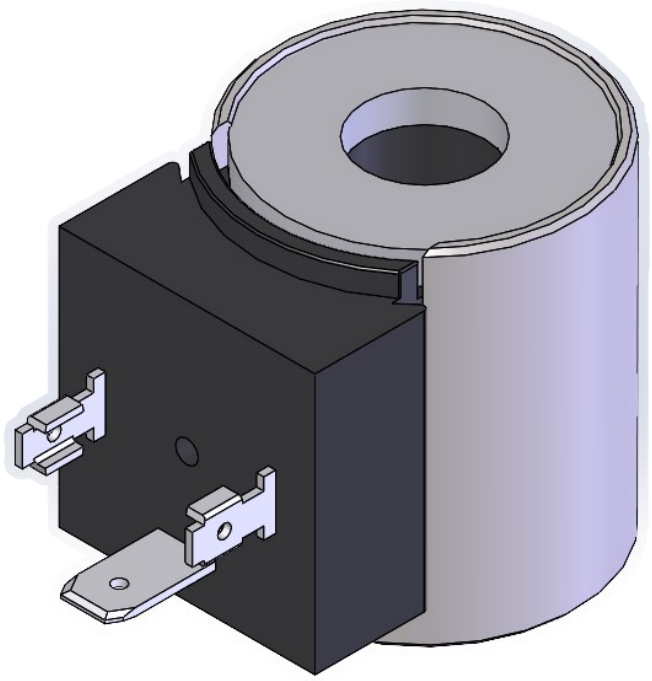


09400
COIL - TUBE Ø 13



STANDARD



WITH DIODE
(BI-DIRECTIONAL)

Technical data

Wire insulation class	H (>185°C)
Power	20,50 W
Min temperature range in Coil Power	-20,00 °C
Max temperature range in Coil Power	40,00 °C
Tube	13 mm

Ordering code

CONNECTOR	PROTECTION CLASS	COIL THERMAL INSULATION CLASS	VOLTAGE [V]	RESISTANCE [Ω]	CIRCUIT	ORDERING CODE
DIN 43650	IP65*	H	12 V dc	7	STANDARD	**094001000**
DIN 43650	IP65*	H	24 V dc	28	STANDARD	**094002000**
DEUTSCH DT 4	IP67	H	12 V dc	7	WITH DIODE	**094101000**
DEUTSCH DT 4	IP67	H	24 V dc	28	WITH DIODE	**094102000**
AMP - JUNIOR	IP65*	H	12 V dc	7	STANDARD	**094201000**
AMP - JUNIOR	IP65*	H	24 V dc	28	STANDARD	**094202000**

*** Protection index with standard connector**