

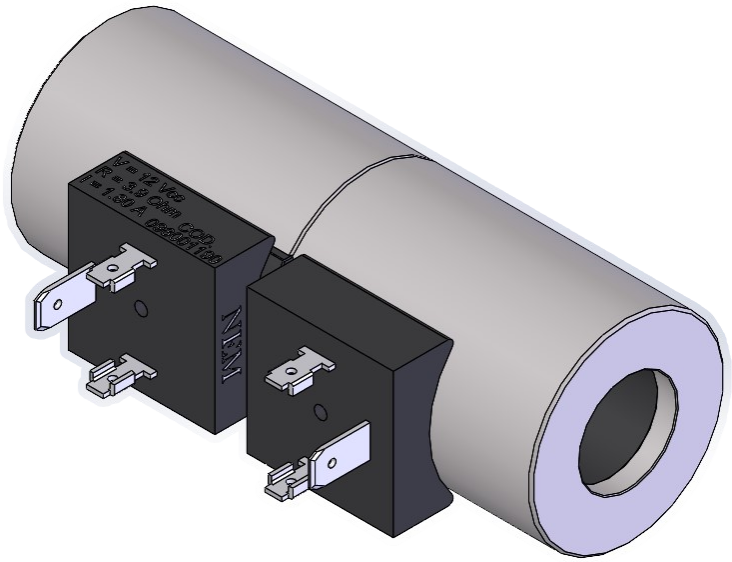


09800
PROPORTIONAL COIL - TUBE Ø 19



STANDARD



WITH DIODE
(BI-DIRECTIONAL)

Technical data

Wire insulation class	H (>185°C)
Power	36,00 W
Min temperature range in Coil Power	-20,00 °C
Max temperature range in Coil Power	40,00 °C
Tube	19 mm

Ordering code

CONNECTOR	PROTECTION CLASS	COIL THERMAL INSULATION CLASS	VOLTAGE [V]	RESISTANCE [Ω]	CIRCUIT	ORDERING CODE
DIN 43650	IP65*	H	12 V dc	3,9	STANDARD	**098001190**
DIN 43650	IP65*	H	24 V dc	14,5	STANDARD	**098002190**
DEUTSCH DT 4	IP67	F	12 V dc	3,9	WITH DIODE	**098101190**
DEUTSCH DT 4	IP67	F	24 V dc	14,5	WITH DIODE	**098102190**
AMP - JUNIOR	IP65*	F	12 V dc	3,9	WITH DIODE	**098201190**
AMP - JUNIOR	IP65*	F	24 V dc	14,5	WITH DIODE	**098202190**
AMP - JUNIOR	IP65*	H	26 V dc	18,8	WITH DIODE	**098212192**

*** Protection index with standard connector**