ISTRUZIONI DI MONTAGGIO
MOUNTING INSTRUCTIONS

CODICE FAMIGLIA
FAMILY CODE
103005

SUPPORTO CONVERSIONE POMPA ISO/ASAE
ISO/ASAE SWITCH BRACKET

Codice foglio:9970010515 Rev: //
Rev: //
Codice fascicolo: //
Data: Mercoledì 14 gennaio 2009

Per consentire una corretta lubrificazione interna del supporto, è necessario rimuovere il seeger ed il paraolio prima del montaggio.

In order to allow a proper bracket internal lubrication, it is necessary to remove the seeger and the oil seal before mounting.

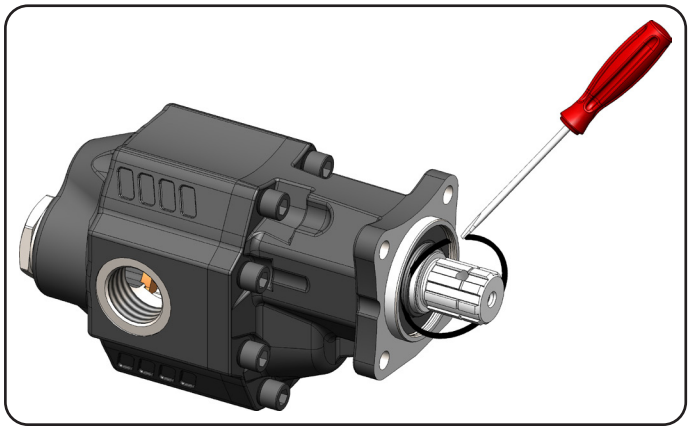


Fig. 1 Togliere il seeger
Remove the seeger

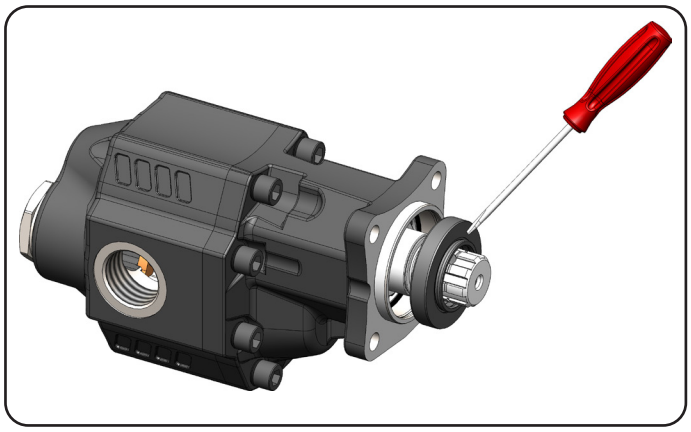


Fig. 2 Togliere il paraolio
Remove the oil seal

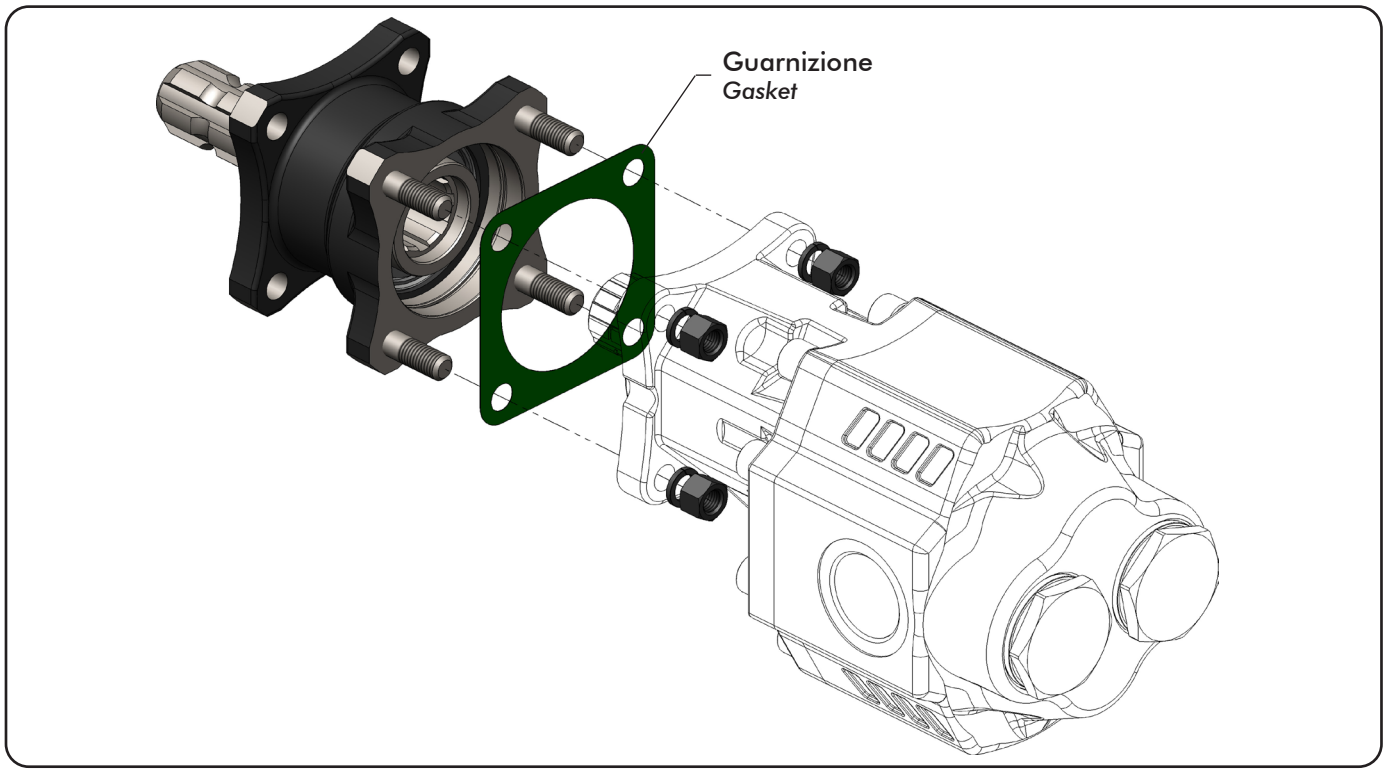


Fig. 3 Montare il supporto alla pompa interponendo la guarnizione *a corredo.*
Mount the bracket on the pump and interject the gasket provided.

O.M.F.B. S.p.A. Hydraulic Components
We reserve the right to make any changes without notice.
Edition 2009.01 No reproduction, however partial, is permitted.
Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy Tel.: +39.030.9830611
Fax: +39.030.9839207-208 Internet:www.omfb.it e-mail:contatti@omfb.it