



Solenoid Operated Directional Control Valve with Auxiliary Lever Override
RPER3-06

Size 06 (D03) • Q_{max} 80 l/min (21 GPM) • p_{max} 350 bar (5100 PSI)

Technical Features

- › Auxiliary lever overrides for ON-OFF solenoid valves of the type RPE3-06 (Datasheet HA 4010) with Size 06 and mounting interface acc. to ISO 4401, DIN 24340 (CETOP 03)
- › Auxiliary lever operators allow the valve to be operated when electrical system is de-energized, e.g. emergency operation, electrical failures, maintenance activities
- › Manual lever and actuation element can be rotated in 90° increments for flexible installation
- › When the valve is electrically operated the hand lever remains stopped in its neutral position
- › The lever override does not affect the performances of the base valve
- › In the standard version, the valve housing is phosphated for basic surface corrosion protection and as preparation for painting. Steel parts are zinc-coated for 240 h salt spray protection acc. to ISO 9227
- › Enhanced surface protection for mobile sector available for the valve housing and steel parts (ISO 9227, 520 h salt spray)

Technical Data

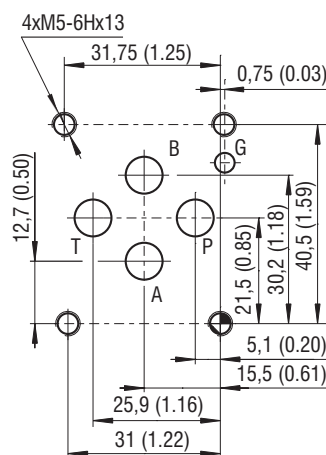Valve size	06 (D03)	
Max. flow	l/min (GPM)	80 (21.1)
Max. operating pressure at port P, A, B	bar (PSI)	350 (5080)
Max. operating pressure at port T	bar (PSI)	100 (1450)
Fluid temperature range (NBR)	°C (°F)	-30 ... +80 (-22 ... +176)
Fluid temperature range (FPM)	°C (°F)	-20 ... +80 (-4 ... +176)
Ambient temperature range	°C (°F)	-30 ... +50 (-22 ... +122)
Service life	cycles	10 ⁶
Rated power supply voltage	%	AC: ±10 DC: ±10
Max. switching frequency	1/h	10 000
Lever characteristics		
Total stroke angle	deg	±20
Working stroke angle		±12 to 20
Operating force	N (lbf)	40 (29.5)
Lever device weight	kg (lbs)	0.59 (1.3)
General information		
General information	HA 0060	Products and operating conditions
Coil types / connectors	HA 8007 / HA 8008	C22B* / K*
Mounting interface	HA 0019	Size 06
Spare parts	HA 8010	

ISO 4401-03-02-0-05


Ports P, A, B, T - max. Ø7.5 mm (0.9 in)

Objednávací klíč
RPER3-06

4/2 and 4/3 solenoid operated directional control valve with auxiliary lever override

Valve size
Number of valve positions

two
three

Spool symbols

see the table "Spool Symbols"

Rated supply voltage of solenoids

(at the coil terminals)

12 V DC / 2,72 A
24 V DC / 1,29 A
27 V DC / 1,07 A
205 V DC / 0,15 A
24 V AC / 1,56 A / 50 (60) Hz
120 V AC / 0,26 A / 60 Hz
230 V AC / 0,15 A / 50 (60) Hz

01200
02400
02700
20500
02450
12060
23050

For directional valves with two solenoids, one solenoid must be de-energized before the other solenoid can be charged.
For AC voltage supply use coils with connector type E5.
For other solenoid voltage supply options see datasheet HA 8007.
The solenoid operated valves are delivered without connectors.
For available connectors see datasheet HA 8008.
The orifice to the P port can be ordered separately, see datasheet HA 8010.
Mounting bolts M5 x 45 DIN 912-10.9 or studs must be ordered separately
Tightening torque is 8.9+1 Nm (6.56+0.7 lbf.ft)

Surface treatment

No designation standard
A zinc-coated (ZnCr-3), ISO 9227 (240 h)
B zinc-coated (ZnNi), ISO 9227 (520 h)

Lever override length

No designation standard 102 mm

Manual lever and position of override actuating section

A19 standard, lever on side A, upward
B19 standard, lever on side B, upward

Seals

No designation NBR
V FPM (Viton)

Manual override at actuator system

No designation standard

Connector

E1 EN 175301-803-A
E2 E1 with quenching diode
E3A AMP Junior Timer - axial direction (2 pins; male)
E4A E3A with quenching diode
E5 EN 175301-803-A with integrated rectifier
E8 loose conductors (two insulated wires)
E9 E8 with quenching diode
E12A Deutsch DT04-2P - axial direction (2 pins; male)
E13A E12A with quenching diode

Besides the commonly used valve versions shown other special models are available.
Contact our technical support for their identification, feasibility and operating limits.

For operating limits, pressure drop and protection degree IP refer to Datasheet HA 4010 of the base valve RPE3-06.

Spool Symbols


Type	Symbol	Interposition	Type	Symbol	Interposition
Z11			R11		
C11			H51		
H11					
Y11					

Dimensions in millimeters (in)




The lever operator should never be used when any solenoid is energized.


RPER3-063*/A19

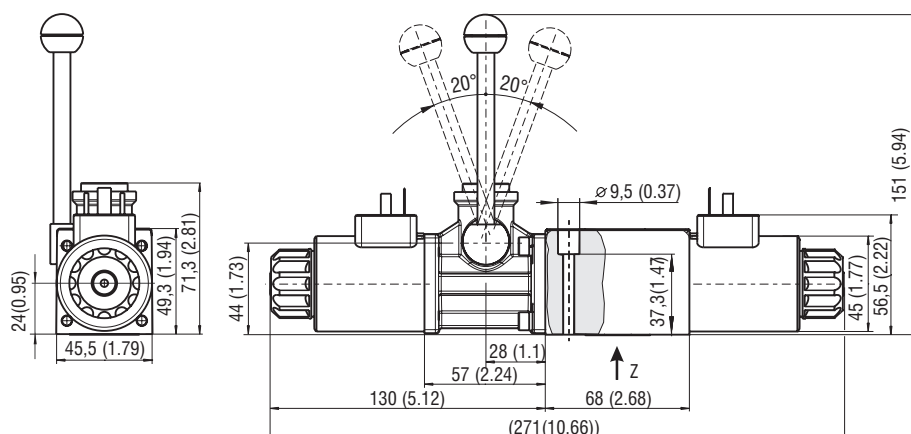

RPER3-062*/A19

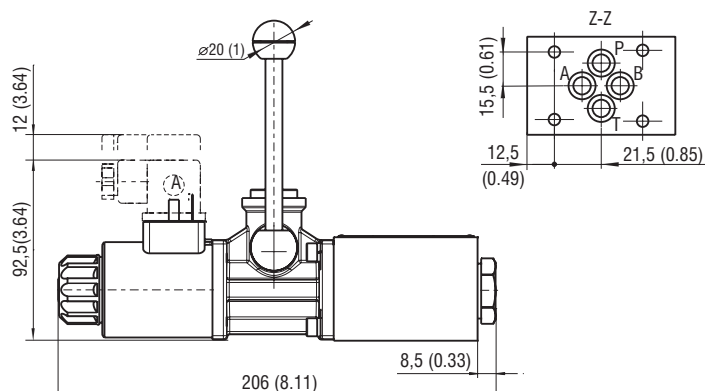

RPER3-063*/B19

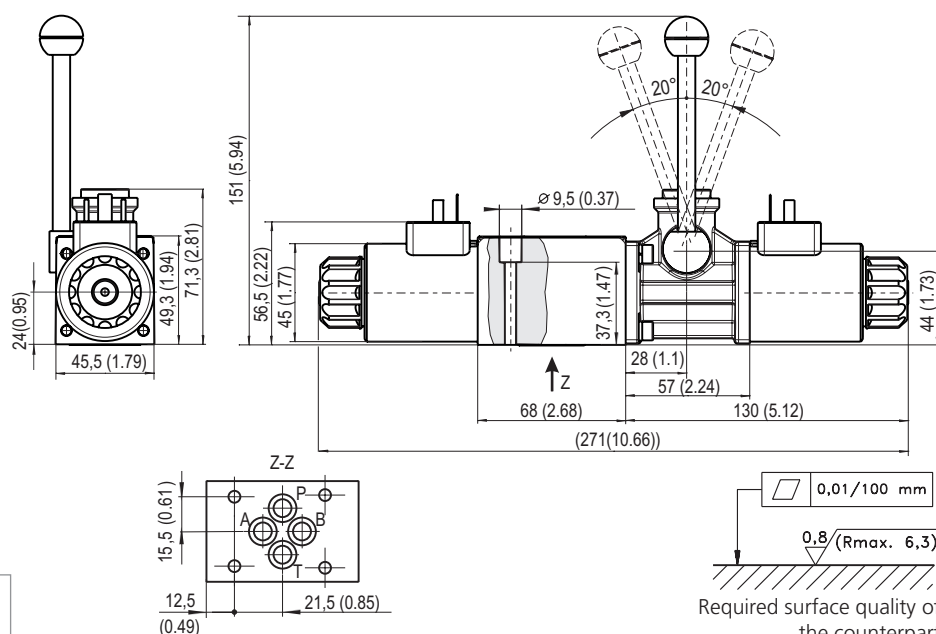

Manual lever and actuating section is shown in the standard supplied position which is the most frequently used. Both elements can be rotated to various positions 90° apart. For other positions of lever and actuating section consult our technical department for their identification.

Mounting screws 8.9+1 Nm (6.56+0.7 lbf.ft)
M5x45 DIN 912-10.9