

Single Acting Counterbalance Valve With Electric Bypass

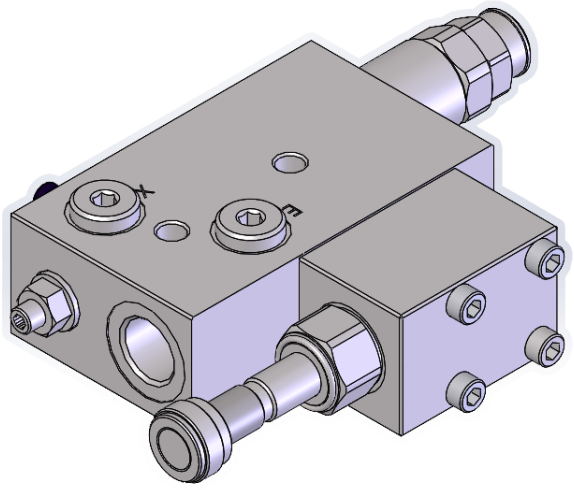



STEEL BODY G 1/2" ; SAE-10

Max flow	**110,00 l/min**
Max working pressure (Steel body)	**350,00 bar**
Compensation	**Not Compensated**
Weight in Steel	**3,60 Kg**
Tamper proof code	**9021030190**
Coil family codes	**09400**

- Coil 09400 to be ordered separately
- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD10X-C is recommended for circuits with high back pressure)

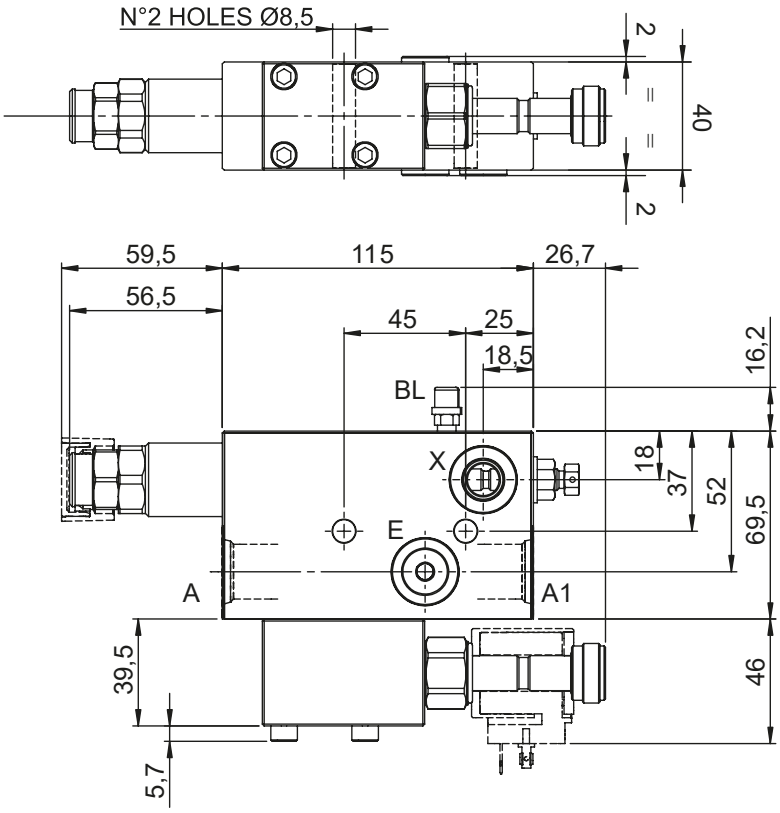

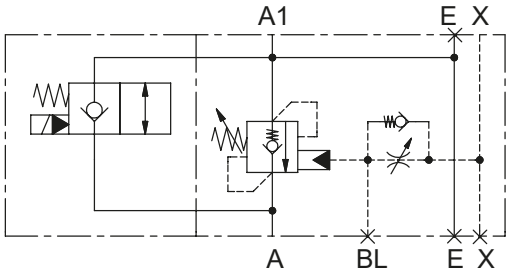

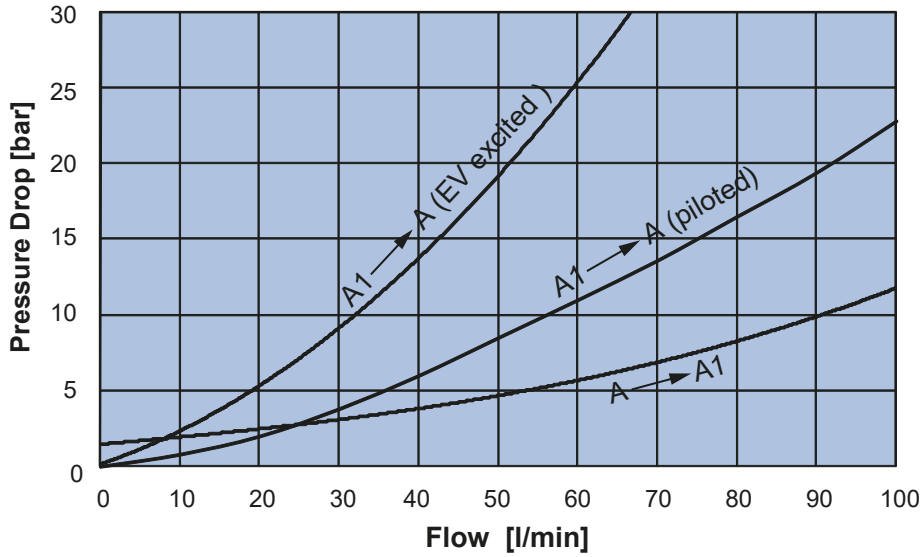

H 1 0 0 1 N [ ] [ ] S [ ] 0 0

PILOT RATIO	
50	4:1 + BPE

SPRINGS	4
Setting Range min.-max. [bar]	120 - 410
Pressure Increase [bar/turn]	85
Standard Setting 4 l/min [bar]	260

PORTS	04	54
A,A1	G 1/2”	SAE 10
X,E	G 1/4”	SAE 06